

CEP7 Solid State Overload Relays

Advanced solid state motor protection

The CEP7 solid state overload relay includes advanced technology with several key features like:

- Selectable trip class and field installable modules
- A wide (5:1) set current adjustment range
- A robust mechanical and electrical mounting
- Self-sealed latching mechanism

The basic concept of utilizing Application Specific Integrated Circuits (ASICs) results in an affordable solid state overload relay. This kind of versatility and accuracy is simply not possible with traditional bimetallic or eutectic alloy electromechanical overload relays.



Fewer units means greater application flexibility

The CEP7 Solid State Overload Relay is available in three basic models:

- CEP7-ED1 is a Class 10, manual reset model available up to 45 amperes which covers the most common horsepower motors and your every day application. This model is economically priced to be competitive with adjustable bimetallic overload relays.
- CEP7-EE is a full featured selectable trip class (10, 15, 20 & 30) 3-phase application overload relay with provision for field mountable modules to handle remote reset, jam protection, and other modules previously available only in higher priced electronic overload relays.

Manual reset or automatic reset can be selected with dip switches on the CEP7-EE models.

- CEP7S-EE is a 1-phase application overload relay packing all features of the 3-phase CEP7-EE model.



Wide current adjustment range

Thermal or bimetallic overload relays typically have a small current adjustment range of 1.5:1 meaning that the maximum setting is generally 1.5 times the lower setting. The CEP7 caused the industry to take note of the flexibility when it first introduced a 3.2:1 adjustment ratio. A wider adjustment range is the primary reason the industry has been turning to more specifications calling for electronic overload relay protection over thermal overload relays. Sprecher + Schuh's CEP7 overload relay is capable of adjustment to a maximum of five times the minimum set current, which dramatically reduces the number of units required on-hand to cover the full range of current settings up to 200 amperes.



45A


45A

120A


30A

200A

5 : 1 Current Range

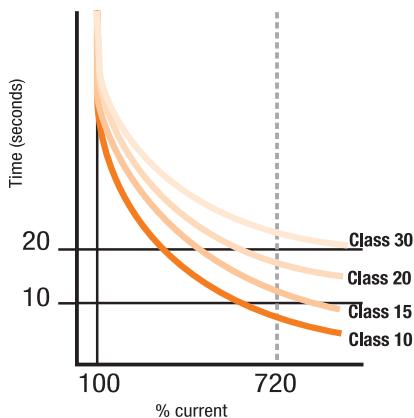

CEP7 overload relays are available with Class 10, 15, 20 or 30 tripping characteristics

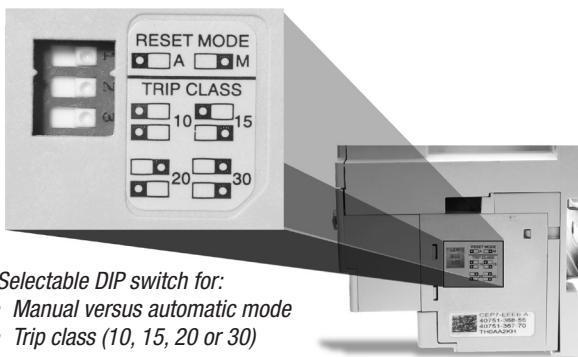

Selectable DIP switch for:

- Manual versus automatic mode
- Trip class (10, 15, 20 or 30)

Selectable tripping class

Because of today's lighter T-frame motors, Class 10 overload relays (relays that trip within 10 seconds of a locked rotor condition) have become the industry standard. If your application requires a longer motor run-up time, the CEP7-EE Selectable Trip Class has DIP-switches providing Trip Class selection of 10, 15, 20 or 30 seconds. This ability allows you to closely match the Trip Class with the run-up time of the motor.

operate in -20° C. or up to 60° C (140 °F) and withstand 3G of vibration or 30G of shock on a mountain up to an altitude of 2000m or in a jungle at 95% humidity. Reliability under every conceivable environmental condition is a quality built into the design of the CEP7 electronic overload relay.

Self-powered design means convenience


By developing the power it requires from the applied voltage, the CEP7 is "self-powered," eliminating the need for a separate control power source. This is not the case with some other electronic overload relays. Since the CEP7 is self-powered and a traditional auxiliary contact is used to interface with the contactor, the user can apply the CEP7 the same way as an electro-mechanical overload. No special connections or control schematic diagram provisions are required in 3-phase applications.


Superior phase failure protection

The CEP7's on-board electronics are constantly monitoring all three phases. If the ASIC board senses that one phase is missing during a steady state running condition on a fully loaded motor, it will trigger in 3 seconds. If a single phase condition is present during starting, the CEP7 will trip within 8 seconds (for a motor >80% loaded). These times are much faster than any thermal bimetallic overload relay. In addition, CEP7 overload relays detect a 50% phase imbalance in the same way as a phase loss.

Robust design

The CEP7 has been designed to physically extend to the back-pan therefore aligning the mounting of the overload with the corresponding contactor. Further, the mechanical attachment and direct electrical connection to the contactor provides a robust mounting, which means less damage from shipping or during field wire installation. The bipolar latching relay which controls the normally closed trip contacts and normally open alarm circuit contacts have been self-enclosed, therefore insulating the electromagnet and shielding against airborne metal particles and other potential environmental debris. The CEP7 has been tested to

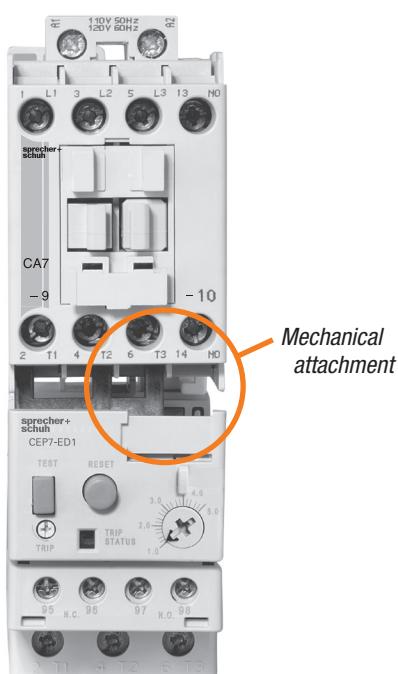

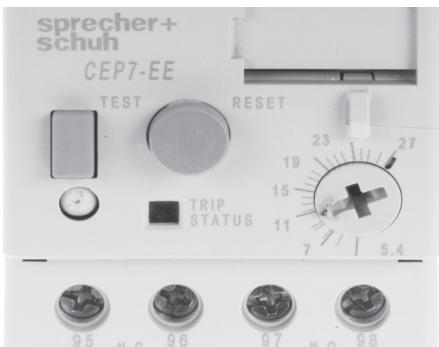


Increased accuracy and improved motor protection

Microelectronics provide flexible and accurate motor overload protection. Unlike traditional overload relays that simulate heat build-up in the motor by passing current through a heater element, CEP7 solid state overload relays measure motor current directly through integrated current transformers. The transformers, in turn, create a magnetic field that induces DC voltage onto the ASIC board. The electronics identify excessive current or loss of phase more accurately, and react to the condition with greater speed and reliability than traditional overload relays. In addition, CEP7 solid state relays offer setting accuracies from 2.5 – 5% and repeat accuracy of 1%.

Dramatically lowered energy requirement saves money, reduces panel space

Because traditional overload relays work on the principle of “modeling” the heat generated in the motor (recreating the heat in the bimetal elements or heaters), a significant amount of energy is wasted. In traditional bimetallic overload relays, as many as six watts of heat are dissipated to perform the protective function. Because the CEP7 uses sampling techniques to actually measure the current flowing in the circuit, very little heat is dissipated in the device...as little as 0.5 watts. This not only reduces the total amount of electrical energy consumed in an application, but it can also have a dramatic impact on the design and layout of control panels. The density of motor starters can be much greater because less heat is generated by each of the individual components. Higher density results in smaller control panels. In addition, special ventilation or air conditioning that might have been required to protect sensitive electronic equipment such as PLC's can now be reduced or eliminated. CEP7 overload relays dramatically reduced energy requirement saves money and reduces panel space.

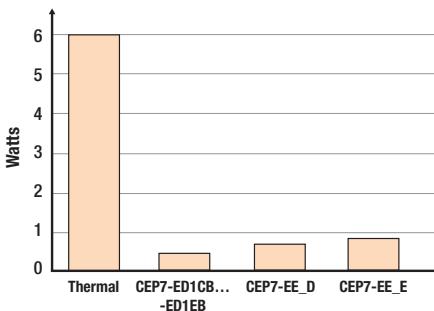

Conventional overload relays dissipate as much as six watts of energy compared with as little as 0.5 watts for a comparable size CEP7



Additional Protection with Side Mount Modules

The CEP7 offers a variety of field installable accessories for side mount on the left side. Side mount modules provide additional motor protection functionality traditionally found only on more expensive models. Modules include the following additional features.

- **Remote Reset** provision for reset after trip from a remote pilot device
- **Jam Protection/Remote Reset** provides adjustable Jam set points and trip delay plus remote reset
- **Ground Fault Protection/Remote Reset** combined with ground fault current transformers provide adjustable set points for ground fault trip protection of equipment plus remote reset
- **Ground Fault/Jam Protection/Remote Reset** combines all three features as described above
- **PTC Thermistor Relay/Remote Reset** manages thermistor sensor signals from the motor
- **Network Communication Modules** provide motor diagnostic information via **Ethernet** communication
 - Two discreet Inputs and one discreet Output
 - Differentiate between various motor protection algorithms
 - Overload and underload warning
 - Jam protection
 - Proactively alert maintenance personnel just before or when a fault occurs
 - Plus remote reset

Directly Mounted CEP7 Solid State Overload Relays, Manual Reset ①②④

Overload Relay	Directly Mounts to Contactor... ②	Adjustment Range (A)	Trip Class 10	
			Catalog Number	Price
Manual Reset for 30 Applications ①				
	CA7-9...CA7-23 CAN7-12, CAN7-16	0.1...0.5	CEP7-ED1AB	72.05
		0.2...1.0	CEP7-ED1BB	72.05
		1.0...5.0	CEP7-ED1CB	72.05
		3.2...16	CEP7-ED1DB	72.05
		5.4...27	CEP7-ED1EB	72.05
	CA7-30...CA7-55 CAN7-37, CAN7-43	1.0...5.0	CEP7-ED1CD	110.38
		3.2...16	CEP7-ED1DD	110.38
		5.4...27	CEP7-ED1ED	110.38
		9...45	CEP7-ED1FD	110.38

Directly Mounted CEP7 Solid State Overload Relays, Automatic/Manual Reset ①②③④

Overload Relay	Directly Mounts to Contactor... ②	Adjustment Range (A)	Adjustable Trip Class 10, 15, 20 & 30	
			Catalog Number	Price
Automatic or Manual Reset for 30 Applications ①				
	CA7-9...CA7-23 CAN7-12, CAN7-16	0.1...0.5	CEP7-EEAB	81.45
		0.2...1.0	CEP7-EEBB	81.45
		1.0...5.0	CEP7-EECB	81.45
		3.2...16	CEP7-EEDB	81.45
		5.4...27	CEP7-EEEB	81.45
	CA7-30...CA7-55 CAN7-37, CAN7-43	1.0...5.0	CEP7-EECD	129.79
		3.2...16	CEP7-EEDD	129.79
		5.4...27	CEP7-EEED	129.79
		9...45	CEP7-EEFD	129.79
		11...55	CEP7-EEQD	129.79
	CA7-60...CA7-97 CAN7-85	5.4...27	CEP7-EEEE	146.15
		9...45	CEP7-EEFE	146.15
		18...90	CEP7-EEGE	146.15
		60...120	CEP7-EEVE	146.15
Automatic or Manual Reset for 10 Applications ①				
	CA7-9...CA7-23 CAN7-12, CAN7-16	1.0...5.0	CEP7S-EEPB	81.45
		3.2...16	CEP7S-EERB	81.45
		5.4...27	CEP7S-EESB	81.45
	CA7-30...CA7-43 CAN7-37, CAN7-43	9...45	CEP7S-EETD	129.79
	CA7-60...CA7-97 CAN7-85	18...90	CEP7S-EEUE	146.15

TIP!

Most industrial applications usually call for an overload relay that must be manually reset in the event of a trip. This allows the cause of the overload to be identified before the motor is restarted. An overload relay that resets automatically is generally for specialized, or remote applications, such as rooftop AC units where restarting the motor will not harm people or equipment.

① 3-phase CEP7 units are only designed for 30 applications. Single phase CEP7S units are only designed for single phase applications.

② This reference is not intended to be a guide for selecting contactors. Size overload relays using the full load current of the motor.

③ The reset time of a CEP7 set in the automatic mode is approximately 120 seconds.

④ CEP7 overload relays do not work with Variable Frequency Drives, DC Applications or Softstarters with braking options.

Pass-Thru CEP7 Solid State Overload Relays ①


Overload Relay	Separate Mount for use with... ②	Adjustment Range (A)	Trip Class 10	
			Catalog Number	Price
Manual Reset for 30 Applications ①④				
 Fig. 1	CA8-09...12 CA7-9...CA7-23 CAN7-12...CAN7-37	1.0...5.0	CEP7-ED1CP	72.05
		3.2... 16	CEP7-ED1DP	72.05
		5.4...27	CEP7-ED1EP	72.05



Fig. 1


Overload Relay	Separate Mount for use with... ②	Adjustment Range (A)	Adjustable Trip Class 10, 15, 20 & 30	
			Catalog Number	Price
Automatic or Manual Reset for 30 Applications ①③④				
 Fig. 1	CA8-09...12 CA7-9...CA7-23 CAN7-12...CAN7-37	1.0...5.0	CEP7-EECP	77.37
		3.2... 16	CEP7-EEDP	77.37
		5.4...27	CEP7-EEEP	77.37
Automatic or Manual Reset for 10 Applications ①③④				
 Fig. 1	CA8-09...12 CA7-9...CA7-23 CAN7-12...CAN7-37	1.0...5.0	CEP7S-EEPP	77.37
		3.2...16	CEP7S-EERP	77.37
		5.4...27	CEP7S-EESP	77.37



Fig. 2

Pass-thru window

Description

Fig. 1 - The Pass-Thru version of the CEP7 permits separate mounting of the overload relay.


Fig. 2 - Motor load side cables simply pass-thru a window in the overload relay body. The internal current transformers monitor the current flow.

Benefits

- No need for a panel mount adapter as required with direct-connect versions
- Eliminates 3 to 6 wire terminations
- Designed for use with CA8 or CA7 contactors
- Easily replaces outdated overload relays in existing starter assemblies
- Provides state-of-the-art accuracy and motor protection

- ① 3-phase CEP7 units are only designed for 30 applications. Single phase CEP7S units are only designed for single phase applications.
- ② This reference is not intended to be a guide for selecting contactors. Size overload relays using the full load current of the motor.
- ③ The reset time of a CEP7 set in the automatic mode is approximately 120 seconds.
- ④ CEP7 overload relays do not work with Variable Frequency Drives, DC Applications or Softstarters with braking options.
- ⑤ Pass-Thru windows will accept one power wire up to #10 AWG wire (6mm²).

Large Amp CEP7 Solid State Overload Relays, Automatic and Manual Reset ①②③④⑥


Overload Relay	Directly Mounts to Contactor... ②	CT Ratio	Adjustment Range (A)	Selectable Trip Class (10,15,20 & 30)	
				Catalog Number	Price
Automatic or Manual Reset for 3Ø Applications ①③					
 CEP7-EEHF	CA6-115...CA6-180	150:5	30...150	CEP7-EEHF	473.19
	CA6-115-EI...CA6-180-EI	200:5	40...200	CEP7-EEJF	473.19
	CAN6-180(EI)	200:5	40...200	CEP7-EEJG	827.82
	CA6-210-EI...CA6-420-EI	300:5	60...300	CEP7-EEKG	827.82
	CAN6-300-EI	500:5	100...500	CEP7-EELG	827.82
	CA6-630-EI...CA6-860-EI	600:5	120...600	CEP7-EEMH	1,308.16
		800:5	160...800	CEP7-EENH	1,308.16
	CA9-116...146(-EI)	150:5	30...150	CEP7-EEHJ	473.19
	CA9-190...205(-EI)	200:5	40...200	CEP7-EEJJ	473.19
Current Transformer Kits		For use with...		CT Ratio	
 Includes three Current Transformers (Overload relay sold separately)	CA9-265...305	300:5	⑦	CEP7-CT-UL-300	91.98
				CEP7-CT-CE-300	408.80
	CA9-370...580	600:5	⑦	CEP7-CT-UL-600	214.62
				CEP7-CT-CE-400	511.00
CA9-750...1060		~	~	Refer to Factory	

Items in Gray
are marked for
discontinuation
after 2018

 See page
A129

 See page
A131

Load Side Lugs & Accessories for use with CA6 Contactors Only

Lug or Accessory	Description	For Use With...	Catalog Number	
 CA6-HB	Main Terminal Set, ③ Dual Conductor, Touch Safe • Accommodation for dual connections to each pole • Accepts flat or round conductors • Touch safe to IP20 according to IEC 60529 • Eliminates need for Terminal Shields (price as complete set, containing 2 blocks, 6 lugs)	CEP7-EEHF...CEP7-EEJF, CEP7-EEHJ...CEP7-EEJJ	CA6-HB2	 CA6-L180
		CEP7-EEJG CEP7-EEKG CEP7-EELG	CA6-HB3	
 CA6-L420	Screw Type Lugs - • Accepts round conductors only • Copper construction (set of 3 lugs)	CEP7-EEHF...CEP7-EEJF, CEP7-EEHJ...CEP7-EEJJ	CA6-L180	 CA6-L630
		CEP7-EEJG, CEP7-EEKG, CEP7-EELG	CA6-L420	
 CA6-L630	Screw Type Lugs - • Accommodation for dual connections to each pole • Copper construction accepts round conductors only (set of 3 lugs)	CEP7-EEMH CEP7-EENH	CA6-L630	
 CA6-L860	Screw Type Lugs - • Accommodation for dual connections to each pole • Copper construction accepts round conductors only (set of 3 lugs)	CEP7-EEMH CEP7-EENH	CA6-L860	
	Main Terminal Cover - ④ • CA6 touch protection • Line or load (price each) • IP20; IEC60529 & DIN 40 050 protection	CA6-115(-EI) to 180(-EI) CA6-210-EI to 420-EI CA6-630-EI to 860-EI	CA6-TC180 CA6-TC420 CA6-TC860	

① 3-phase CEP7 units are only designed for 3Ø applications.

② This reference is not intended to be a guide for selecting contactors. Size overload relays using the full load current of the motor.

③ The reset time of a CEP7 set in the automatic mode is approximately 120 seconds.

④ CEP7 Overload relays do not work with Variable Frequency Drives or any Sprecher + Schuh Softstarter with braking options.

⑤ Terminal covers not necessary when using CA6-HB-__ insulated lugs.

⑥ CEP7-EEHF...CEP7-EENH include current transformers used to monitor high amperage.

⑦ Utilizes UL or CE approved Current Transformers in conjunction with an overload selection. Refer to page B13 for current setting guidance when CEP7-EECB is used.

Discount Schedule B3

Accessories - CEP7 Side Mount Modules ①②

Accessory	Description	For use with...	Catalog Number	Price
 CEP7-ERR	Remote Reset Module (Series B) <ul style="list-style-type: none"> Dip switch adjustable reset mode & type <ul style="list-style-type: none"> - Automatic or Manual reset mode - 1- or 3-Phase relay type operation Provision for reset after trip from remote pilot device 	Side-mount to any CEP7-EE_ CEP7S-EE_	CEP7-ERR	79.82
 CEP7-EJM	Jam Protection and Remote Reset Module ③ <ul style="list-style-type: none"> Dip switch adjustable Jam Protection <ul style="list-style-type: none"> - Jam set points -150%, 200%, 300%, or 400% FLA - Trip delay- 0.5, 1, 2, or 4 sec. Provision for reset after trip from remote pilot device 	Side-mount to any CEP7-EE_ CEP7S-EE_	CEP7-EJM	100.87
 CEP7-EPT	PTC Thermistor Relay and Remote Reset Module <ul style="list-style-type: none"> PTC Protection and LED Status indication Type of Control Unit Mark A Number of Sensors 6 Maximum Cold Resistance of Sensor Chain 1500 Ω Trip Resistance 3400 $\Omega \pm 150 \Omega$ Reset Resistance 1600 $\Omega \pm 50 \Omega$ Short Circuit Trip Resistance 25 $\Omega \pm 10 \Omega$ Open Circuit Trip Resistance > 20,000 Ω Maximum Voltage at 1T1 / 1T2 (Rptc=4kΩ) < 7.5 Vdc Maximum Voltage at 1T1 / 1T2 (Rptc=open) < 30 Vdc PTC Response Time 500ms...800ms Provision for reset after trip from remote pilot device 	Side-mount to any CEP7-EE_ CEP7S-EE_	CEP7-EPT	100.87
 ETHERNET/IP CEP7-ETN	Network Communication Modules <ul style="list-style-type: none"> Delivers direct access to motor performance and diagnostic data on a field bus based network in addition to seamless control Includes integrated I/O 2 inputs 1 output Operational and diagnostic data Average motor current Percentage of thermal capacity usage Device status Trip and warning identification Trip history (last five trips) Protective functions Overload warning - 1...100% TCU Jam protection; - Trip setting 150...600% FLA - Trip delay 0.5...25 seconds - Warning setting 100...600% FLA Underload warning - 20...100% FLA 	Side-mount to any CEP7-EE_ CEP7S-EE_	CEP7-ETN	376.10

① Side mount modules must have 24 - 240V, 47 - 63HZ or DC applied to terminals A1 and A2 for control power. CEP7-EPRB and CEP7-ETN require 20.4 - 26.4 VDC only. See B18 for more information.

② See Technical Data, Wiring, and DIP Switch set up starting on page B16 .

③ Dynamic inhibit: Protective function is enabled after the motor current goes above 150% and then falls below 125%.

Accessories - CEP7 Side Mount Modules ①③


Accessory	Description	For use with...	Catalog Number	Price
CEP7-EGF	Ground Fault Protection and Remote Reset Module ②⑥ <ul style="list-style-type: none"> Dip switch adjustable Ground Fault Protection <ul style="list-style-type: none"> > GF Current range set points <ul style="list-style-type: none"> - 20...100mA - 100...500mA - 0.2...1.0A - 1.0...5.0A > GF Trip level 20%-100% • LED status indication • Provision for reset after trip from remote pilot device 	Side-mount to any CEP7-EE_CEP7S-EE	CEP7-EGF	100.87
CEP7-EGJ	Ground Fault/Jam Protection and Remote Reset Module ②⑥ <ul style="list-style-type: none"> Dip switch adjustable Ground Fault Protection same as CEP7-EGF shown above. Jam trip when the motor current exceeds 400% FLA setting when enabled. LED status indication Provision for reset after trip from remote pilot device 	Must use with CEP7-CBCT_Current Sensor	CEP7-EGJ	134.90
	Adjustment Cover for External Modules	All modules with DIP Switches	CEP7-EMC	17.58

B
CEP7 Overloads
CEP7 Ground Fault Sensor Selection ②

Ground fault current is sensed by passing all lines carrying current to and from a motor through the window of a special current transformer called a ground fault sensor. If all the current to the motor returns through the lines in the sensor window, no significant current will be induced in the sensor secondary. If, however, ground fault current returns via a path external to the sensor, such as via the conduit walls, a current will be induced in the sensor secondary. This current will be sensed and amplified by solid state circuits. If the ground fault current is larger than the selected ground fault trip level of the overload relay, the overload relay will trip.


CEP7 Ground Fault Sensor Installation

Ground Fault Sensor Control Wiring

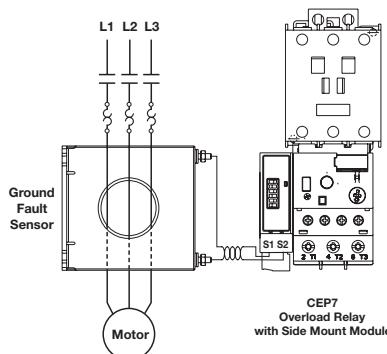

Sensor Type	Maximum Current	Frequency	Turns Ratio	Sensor Window I.D.	Maximum Recommended Cable Size	For use with CEP7-EGF and CEP7-EGJ and contactor...	Catalog Number	Price
	45A	50/60 Hz	1000:1	19.1mm (0.75 in.)	8 AWG @ 600V ④	CA7-9...CA7-37	CEP7-CBCT1	43.44
	90A	50/60 Hz	1000:1	39.6mm (1.56 in.)	2 AWG @ 600V ④	CA7-9...CA7-85	CEP7-CBCT2	164.54
	180A	50/60 Hz	1000:1	63.5 mm (2.50 in.)	250MCM (120mm ²) @ 600V ④	CA7-9...CA9-190	CEP7-CBCT3	221.77
	420A	50/60 Hz	1000:1	82.3 mm (3.25 in.)	350MCM (185mm ²) @ 600V ⑤	CA7-9...CA9-400	CEP7-CBCT4	276.96

① Side mount modules must have 24 - 240V, 47 - 63Hz or DC applied to terminals A1 and A2 for control power. See B18 for more information.

② ATTENTION: The CEP7 Overload relay is not a ground fault circuit interrupter for personnel protection as defined in Article 100 of the NEC.



③ See Application Details on page B17.

④ For a three phase system with one cable per phase.

⑤ For a three phase system with two cables per phase.

⑥ Dynamic inhibit: Protective function is enabled after the motor current goes above 150% and then falls below 125%.

Accessories

Accessory	Description	For use with...	Catalog Number	Price
	Remote Indication Display "Intellibutton" ① Connects, communicates, and receives power from CEP7 Side Mount Modules to remotely view status of CEP7-EE Overload Relays 	CEP7-EJM CEP7-EGF CEP7-EGJ CEP7-EPT CEP7-ERR	CEP7-ERID	55.39
	Replacement Parts Kit for CEP7-ERID Includes (1) each Mounting Ring (Plastic), Terminal Block Plug, and L.E.D. Fault Code Label	CEP7-ERID	CEP7-NCRID	26.27
	DIN-rail / Panel Adaptor For separate mounting of overload relay to back pan or top hat DIN-rail	CEP7-ED1...B CEP7(S)-EE...B	CEP7-EPB	27.08
		CEP7-ED1..D CEP7(S)-EE...D	CEP7-EPD	27.08
		CEP7(S)-EE...E	CEP7-EPE	33.01
	Current Adjustment Shield Prevents inadvertent adjustment of the current setting	all CEP7-ED1 CEP7-EE	CEP7-BC8	11.86
	Solenoid Remote Reset ② - For remote resetting of the solid state overload relay. Replace * in Catalog Number with Coil Code.	CEP7 all	CEP7-EMR*	74.71
	External Reset Button Used for manually resetting overloads mounted in enclosures	all CEP7	Use D7 Reset - See Section H.	
	External Reset Button Adaptor Provides a larger "target area" for resetting the overload relay when using an External Reset Button	CEP7-ED1(all), CEP7-EE_B, CEP7-EE_D, CEP7-EE_E, CEP7-EE_P ①	CEP7-ERA	13.29

Solenoid Remote Reset Coil Codes

 (Replace ***** with coil code below)

A.C. Coil Code	Voltage Range 50 / 60 Hz ③
J	24V
D	120V
A	240V

D.C. Coil Code	Voltage ④
Z24	24VDC
Z48	48VDC
Z01	115VDC

① CEP7-ERA does not fit CEP7-EE_J units without removing the CEP7 cover.

② Solenoid Reset Modules only mount on CEP7 Series C or later.

③ See page B21 for additional details on installation and LED functions.

④ Coil consumption of AC coils is 8VA.




⑤ Coil consumption of DC coils is 12 watts.

CEP7 Intelli-button Reset Kit with Side Mount Module (For use on CEP7(S)-EE_)

Accessory	Description	Kit includes...	Catalog Number	Price
	Remote Reset Only	CEP7-ERID CEP7-ERR	CEP7-IB1	178.85
	Jam and Remote Reset	CEP7-ERID CEP7-EJM (B)	CEP7-IB2	187.03
	Thermistor Relay and Remote Reset	CEP7-ERID CEP7-EPT	CEP7-IB3	200.31
	Ground Fault and Remote Reset	CEP7-ERID CEP7-EGF CEP7-CBCT1 (45A)	CEP7-IB4	231.99
		CEP7-ERID CEP7-EGF CEP7-CBCT2 (90A)	CEP7-IB5	389.38
		CEP7-ERID CEP7-EGF CEP7-CBCT3 (180A)	CEP7-IB6	389.38
		CEP7-ERID CEP7-EGF CEP7-CBCT4 (420A)	CEP7-IB7	443.55
	Ground Fault and Jam and Remote Reset Module	CEP7-ERID CEP7-EGJ CEP7-CBCT1 (45A)	CEP7-IB8	263.68
		CEP7-ERID CEP7-EGJ CEP7-CBCT2 (90A)	CEP7-IB9	375.07
		CEP7-ERID CEP7-EGJ CEP7-CBCT3 (180A)	CEP7-IB10	420.04
		CEP7-ERID CEP7-EGJ CEP7-CBCT4 (420A)	CEP7-IB11	475.23

Technical Information

	CEP7-ED1...B CEP7(S)-EE...B	CEP7-ED1...D CEP7(S)-EE...D	CEP7(S)-EE...E
Rated Insulation Voltage - U_i [V]		690 AC	
Rated Insulation Strength- U_{imp} [kV]		6 AC	
Rated Operation Voltage - U_e [V]		690 AC (IEC) / 600 AC (UL/CSA)	
Rated Operating Frequency [Hz]		50/60	
Terminal Cross Sections			
Terminal Type			
Terminal Screw		M5	M8
Flexible with wire end ferrule	One conductor [mm ²]	1 x (2.5...16)	1 x (4...50)
	Torque [Nm]	2.5	24
	Two conductors [mm ²]	2 x (2.5...10) ①	2 x (4...25)
Torque [Nm]		3.4	4
	One conductor [mm ²]	1 x (2.5...25)	1 x (4...50)
	Torque [Nm]	2.5	4
Course stranded / solid	Two conductors [mm ²]	2 x (6...16) ①	2 x (4...35)
	Torque [Nm]	3.4	4
	One conductor [AWG]	1 x (14...6)	1 x (12...1/0)
Stranded / Solid	Torque [lb-in]	22	35
	Two conductors [AWG]	2 x (14...6) ①	2 x (8...2)
	Torque [lb-in]	30	35
Pozidrive Screwdriver Size		2	----
Slotted screwdriver	[mm]	1 x 6	---
Hexagon Socket Size	[mm]	---	4

	CEP7-EE_F	CEP7-EE_G	CEP7-EE_H	CEP7-EE_J
Rated Insulation Voltage - U_i [V]		1000 AC		690 AC
Rated Insulation Strength- U_{imp} [kV]		6 AC		6 AC
Rated Operation Voltage - U_e [V]		1000 AC (IEC) / 600 AC (UL/CSA)		690 AC (IEC)/600AC (UL)
Rated Operating Frequency [Hz]		50/60		50/60
Terminal Power				
Type				
Direct Connection 		Hexagonal Bolt	Hexagonal Bolt	Hexagonal Bolt
Recommended Torque [Nm]	M8 x 25	M10 x 30	M12 x 40	M8 x 25
[lb-in]	11	43	68	11
	100	380	600	100
With Main Terminal Set (CA6...HB...)		With CA6-HB2	With CA6-HB3	With CA6-HB2
	sm. opening [mm ²]	16...50	25...240	~
	lg. opening [mm ²]	16...120	25...240	~
				16...50 16...120
	sm. opening [mm ²]	16...50	25...240	~
	lg. opening [mm ²]	16...120	25...240	~
				16...50 16...120
CA6-HB 	b max. [mm]	20	25	~
	s. sm. opening [mm]	3...9	6...20	~
	lg. opening [mm]	3...14	6...20	~
Recommended Torque [Nm]	10...12	20...25	~	10...12
Wire size per UL/CSA	sm. opening [AWG]	#6...1 / 0	~	#6...1 / 0
	lg. opening [AWG]	#6...250MCM	~	#6...250MCM
Recommended Torque [lb-in]	90...110	180...220	~	90...110
With Screw-type Lugs - Copper Clad (CA6-L...)				
CA6-L180	[AWG]	#6...250 MCM	W/CEP7-EEMH	W/CEP7-EEHH
	[lb-in]	90...110	~	~
CA6-L420	[AWG]	~	#2...350 MCM	~
	[lb-in]	~	375	~
CA6-L630	[AWG]	~	~	~
	[lb-in]	~	2/0...500 MCM 400	~
CA6-L860	[AWG]	~	~	~
	[lb-in]	~	2/0...500 MCM 400	~

① For multiple conductor applications the same style and size of wire must be used.

Technical Information

Control Circuit					
Rated Insulation Voltage - U_i	[V]	690 AC			
Rated Insulation Strength- U_{imp}	[kV]	6 AC			
Rated Operation Voltage - U_e	[V]	690 AC (IEC) / 600 AC (UL/CSA)			
Rated Designation		B600			
Rated Operating Current	I_e	NO	NC		
AC-15	12...120V [A]	3	2		
	220...240V [A]	1.5	1.5		
	380...480V [A]	0.75	0.75		
	500...600V [A]	0.6	0.6		
DC-13 at L/R 15ms	24V [A]	1.1	1.1		
	110V [A]	0.4	0.4		
	220V [A]	0.2	0.2		
	440V [A]	0.08	0.08		
Thermal Current - I_{the}	[A]	5			
Contact Reliability	[kV]	17V, 5mA			
Screw Terminal Cross Sections					
Terminal Screw					
 Flexible with wire end ferrule	One conductor [mm ²]	M3 1 x (0.5...2.5)			
	Torque [Nm]	0.55			
	Two Conductors [mm ²]	2 x (0.25...1.5)			
	Torque [Nm]	0.55			
 Course stranded / solid	One conductor [mm ²]	1 x (0.5...4)			
	Torque [Nm]	0.55			
	Two conductors [mm ²]	2 x (0.22...2.5)			
	Torque [Nm]	0.55			
 Stranded / Solid	One conductor [AWG]	1 x (24...10)			
	Torque [lb-in]	5			
	Two conductors [AWG]	2 x (24...12)			
	Torque [lb-in]	5			
Pozidrive Screwdriver Size		#1			
Slotted Screwdriver Size	[mm]	0.6 x 3.5			

Heat Dissipation

	Max. Heat Dissipation [Watts]
Catalog Number	
CEP7-ED1AB or CEP7-EEAB	0.03
CEP7-ED1BB or CEP7-EEBB	0.04
CEP7-ED1_B or CEP7-EE_B (other than A or B)	0.53
CEP7-EE_D	0.73
CEP7-EE_E	0.78
CEP7-EE_GF	0.87
CEP7-EE_F (other than G)	3.52
CEP7-EE_G	8.94
CEP7-EE_H	15.53
CEP7-EE_J	❶

B

CEP7 Overloads

Table for using Current Transformers with CEP7-EECB (range 1.0...5.0 amps) overload relay

Current Setting	CT Ratio 150:5 Equivalent FLA	CT Ratio 200:5 Equivalent FLA	CT Ratio 300:5 Equivalent FLA	CT Ratio 500:5 Equivalent FLA	CT Ratio 600:5 Equivalent FLA	CT Ratio 800:5 Equivalent FLA	CT Ratio 1000:5 Equivalent FLA	CT Ratio 1500:5 Equivalent FLA
1.00	30	40	60	100	120	160	200	300
1.25	38	50	75	125	150	200	250	375
1.50	45	60	90	150	180	240	300	450
1.75	53	70	105	175	210	280	350	525
2.00	60	80	120	200	240	320	400	600
2.25	68	90	135	225	270	360	450	675
2.50	75	100	150	250	300	400	500	750
2.75	83	110	165	275	330	440	550	825
3.00	90	120	180	300	360	480	600	900
3.25	98	130	195	325	390	520	650	975
3.50	105	140	210	350	420	560	700	1050
3.75	113	150	225	375	450	600	750	1125
4.00	120	160	240	400	480	640	800	1200

❶ Not available at time of printing.

Technical Information

Environmental Ratings

Ambient Temperature	Storage [°C]	-40...+85 (-40...+185 °F)
	Operating [°C]	-20...+60 (-4...+140 °F)
Humidity	Operating [%]	5...95, non-condensing
	Damp Heat	per IEC 68-2-3 and IEC 68-2-30
Vibration (per IEC 68-2-6)	[G]	3
Shock (per IEC 68-2-27)	[G]	30
Maximum Altitude	[m]	2000
Pollution Environment		Pollution Degree 3
Degree of Protection		IP20
Type of Relay		Ambient compensated, time delay, phase loss sensitive
Nature of Relay		Solid-state
Trip Rating		120% FLA
Trip Class	Type ED	10
	Type EE	10, 15, 20, 30
Reset Mode	Type ED	Manual
	Type EE	Manual or Automatic



Electromagnetic Compatibility

Electrostatic Discharge Immunity	Test Level [kV]	8kV air discharge 6kV contact discharge
RF Immunity	Performance Level	1 ①②
	Test Level [V/m]	10 V/m
Electrical Fast Transient Burst Immunity	Performance Level	1 ①②
	Test Level [kV]	4 kV
Surge Immunity	Performance Level	1 ①②
	Test Level [V/m]	2 kV (L-E) 1 kV (L-L)
	Performance Level	1 ①②

General

Standards	UL 508, CSA C22.2 No. 14, NEMA (ICS 2-1993 Part 4, EN 60947-4-1, EN 60947-5-1)		
Approvals	CE, cULus, C-Tick, CCC		
	CEP7-ED1...B CEP7(S)-EE...B	CEP7-ED1...D CEP7(S)-EE...D	CEP7(S)-EE...E
Weights (unpackaged)	[Kg] [Lb]	0.25 0.55	0.52 1.06





Wiring Diagrams ①

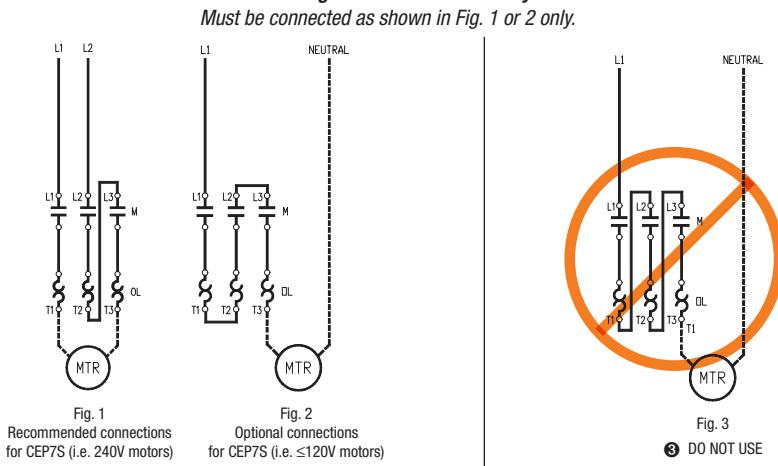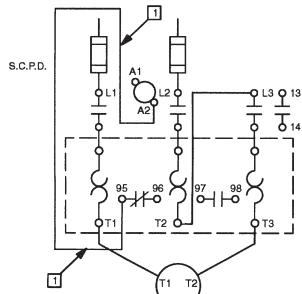 Typical Wiring
 for Single Phase Applications


① Performance Criteria 1 requires the DUT to experience no degradation or loss of performance.
 ② Environment 2.

③ If the CEP7S is connected as shown in Fig. 3 the overload will not trip! The CEP7S contains an electronic circuit board that is self powered. If connected as shown in Fig. 3, the CEP7S circuit board will not power up and the CEP7S would not trip.



④ Connecting a CEP7S in this manner powers the electronic circuit board. Connecting a 3-phase CEP7 in this manner to handle 1-phase will NOT work.

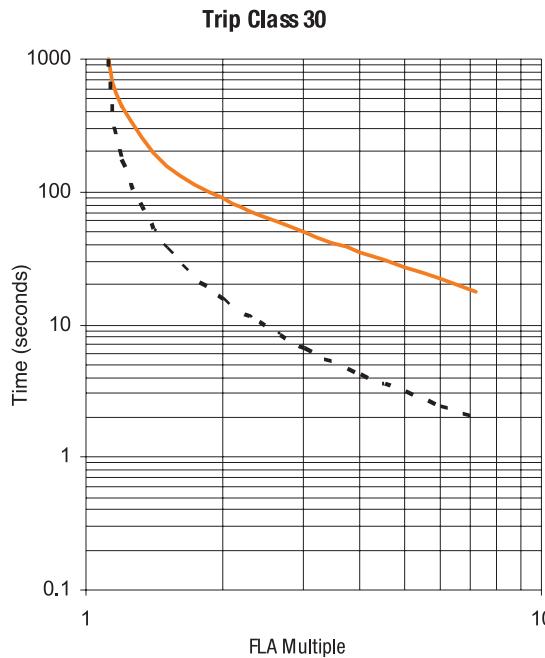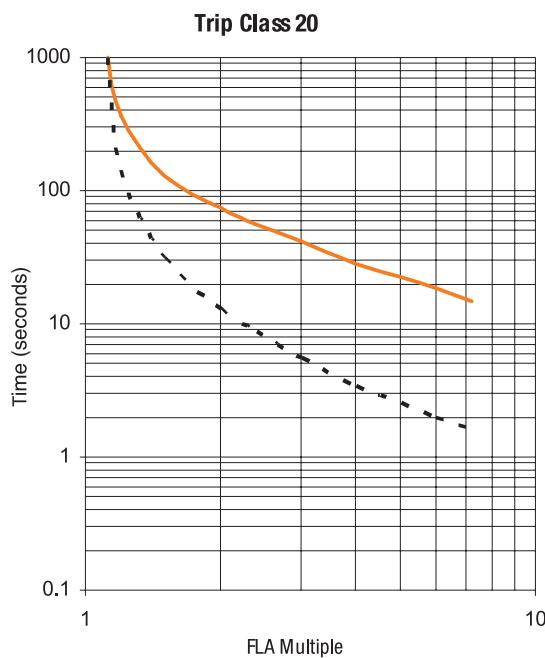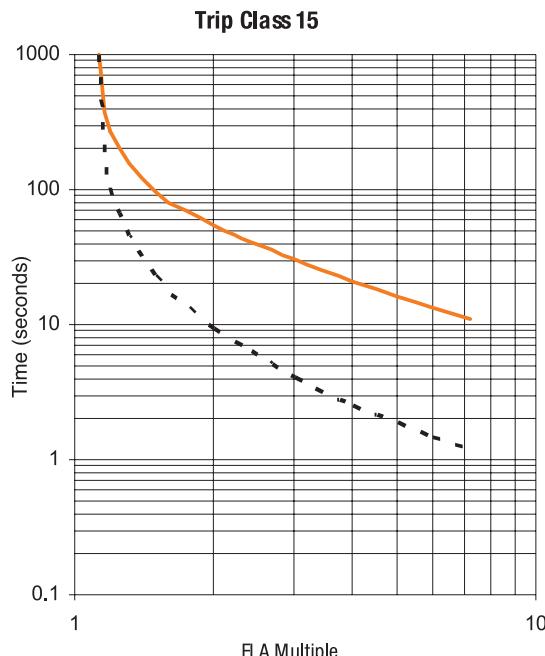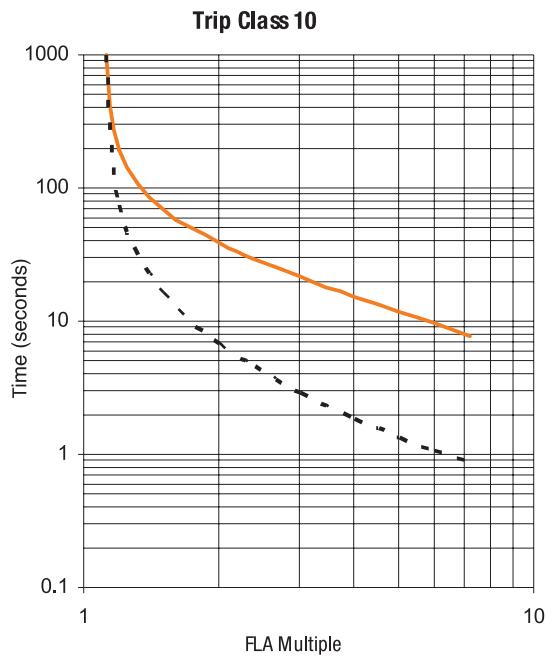Technical Information
Trip Curves ①
B
CEP7 Overloads

Trip Curve Legend

Cold Trip ——————
 Hot Trip - - - - -

① Typical reset time for CEP7 Second Generation devices set to "automatic reset" mode is 120 seconds.

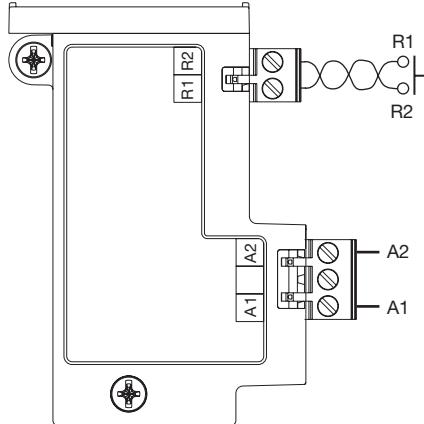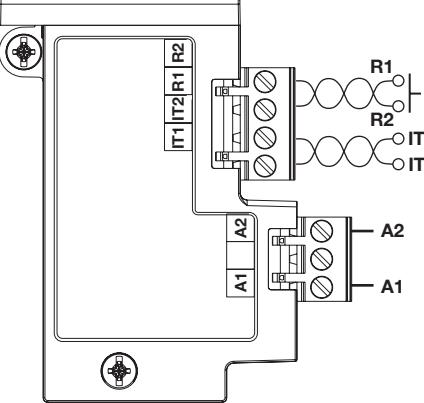
Discount Schedule B3

CEP7-ERR & CEP7-EJM Wiring Diagrams	CEP7-ERR Operational LED	CEP7-ERR Dip Switch																							
 <ul style="list-style-type: none"> Apply 24 - 240V, 47 - 63HZ or DC to terminals A1 and A2 for control power. Connect remote reset pilot device to Terminals R1 and R2. 	<p>Status LED: Steady Green- Module is powered up.</p>	<p>Series B Adjustment Settings</p> <table border="1"> <tr> <td>Overload Relay Remote Reset</td> </tr> <tr> <td>SW1 Manual: 1 Automatic: 0</td> </tr> <tr> <td>Overload Relay Type</td> </tr> <tr> <td>SW2 3 Phase: 1 1 Phase: 0</td> </tr> <tr> <td>SW3 Not Used</td> </tr> </table>	Overload Relay Remote Reset	SW1 Manual: 1 Automatic: 0	Overload Relay Type	SW2 3 Phase: 1 1 Phase: 0	SW3 Not Used																		
Overload Relay Remote Reset																									
SW1 Manual: 1 Automatic: 0																									
Overload Relay Type																									
SW2 3 Phase: 1 1 Phase: 0																									
SW3 Not Used																									
CEP7-EJM Operational LED	CEP7-EJM Dip Switch																								
	<p>Status LED: Green flash- module powered Green solid- module powered plus motor current present Red flash- warning: Fault detected and CEP7 preparing to trip. Red solid- hardware fault: Internal hardware fault detected and CEP7 trip attempted. Recover fault by cycling supply voltage.</p>	<p>Adjustment Settings</p> <table border="1"> <tr> <td>Overload Relay Reset Mode</td> </tr> <tr> <td>SW1 Manual: I Automatic: 0</td> </tr> <tr> <td>Jam Trip Delay</td> </tr> <tr> <td>SW 2 SW 3 SW 4</td> </tr> <tr> <td>0.1 sec 0 0 0</td> </tr> <tr> <td>0.5 sec 0 0 1</td> </tr> <tr> <td>1 sec 0 1 0</td> </tr> <tr> <td>2 sec 0 1 1</td> </tr> <tr> <td>3 sec 1 0 0</td> </tr> <tr> <td>4 sec 1 0 1</td> </tr> <tr> <td>5 sec 1 1 0</td> </tr> <tr> <td>10 sec 1 1 1</td> </tr> <tr> <td>Jam Trip Level</td> </tr> <tr> <td>SW 5 SW 6 SW 7</td> </tr> <tr> <td>Disable / OFF 0 0 0</td> </tr> <tr> <td>100% FLA 0 0 1</td> </tr> <tr> <td>125% FLA 0 1 0</td> </tr> <tr> <td>150% FLA 0 1 1</td> </tr> <tr> <td>200% FLA 1 0 0</td> </tr> <tr> <td>300% FLA 1 0 1</td> </tr> <tr> <td>400% FLA 1 1 0</td> </tr> <tr> <td>600% FLA 1 1 1</td> </tr> <tr> <td>SW8 3 Phase: I 1 Phase: 0</td> </tr> </table>	Overload Relay Reset Mode	SW1 Manual: I Automatic: 0	Jam Trip Delay	SW 2 SW 3 SW 4	0.1 sec 0 0 0	0.5 sec 0 0 1	1 sec 0 1 0	2 sec 0 1 1	3 sec 1 0 0	4 sec 1 0 1	5 sec 1 1 0	10 sec 1 1 1	Jam Trip Level	SW 5 SW 6 SW 7	Disable / OFF 0 0 0	100% FLA 0 0 1	125% FLA 0 1 0	150% FLA 0 1 1	200% FLA 1 0 0	300% FLA 1 0 1	400% FLA 1 1 0	600% FLA 1 1 1	SW8 3 Phase: I 1 Phase: 0
Overload Relay Reset Mode																									
SW1 Manual: I Automatic: 0																									
Jam Trip Delay																									
SW 2 SW 3 SW 4																									
0.1 sec 0 0 0																									
0.5 sec 0 0 1																									
1 sec 0 1 0																									
2 sec 0 1 1																									
3 sec 1 0 0																									
4 sec 1 0 1																									
5 sec 1 1 0																									
10 sec 1 1 1																									
Jam Trip Level																									
SW 5 SW 6 SW 7																									
Disable / OFF 0 0 0																									
100% FLA 0 0 1																									
125% FLA 0 1 0																									
150% FLA 0 1 1																									
200% FLA 1 0 0																									
300% FLA 1 0 1																									
400% FLA 1 1 0																									
600% FLA 1 1 1																									
SW8 3 Phase: I 1 Phase: 0																									
CEP7-EPT Wiring Diagrams	CEP7-EPT Operational LED	CEP7-EPT Dip Switch																							
 <ul style="list-style-type: none"> Apply 24 - 240V, 47 - 63HZ or DC to terminals A1 and A2 for control power. Connect remote reset pilot device to Terminals R1 and R2 Connect Terminal IT1 and IT2 to PTC Chain 	<p>Status LED: Steady Green - Module is powered up Flashing LED - The number of flashes followed by a pause identifies the specific trip code as follows:</p> <ul style="list-style-type: none"> (1) Flash - overload trip (2) Flash - phase loss trip (3) Flash - PTC trip (4) Flash - PTC open circuit (5) Flash - PTC short circuit <p>Fast Flash - Impending trip. PTC Thermistor fault detected and CEP7 not yet capable of tripping.</p> <p>Steady Red - Hardware fault. Internal hardware fault detected and CEP7 trip attempted.</p>	<p>Adjustment Settings</p> <table border="1"> <tr> <td>Overload Relay and PTC Reset Mode</td> </tr> <tr> <td>SW1 Manual: I Automatic: 0</td> </tr> <tr> <td>PTC Protection</td> </tr> <tr> <td>SW2 Enable: I Disable: 0</td> </tr> <tr> <td>Overload Relay Type</td> </tr> <tr> <td>SW3 3 Phase: I 1 Phase: 0</td> </tr> </table>	Overload Relay and PTC Reset Mode	SW1 Manual: I Automatic: 0	PTC Protection	SW2 Enable: I Disable: 0	Overload Relay Type	SW3 3 Phase: I 1 Phase: 0																	
Overload Relay and PTC Reset Mode																									
SW1 Manual: I Automatic: 0																									
PTC Protection																									
SW2 Enable: I Disable: 0																									
Overload Relay Type																									
SW3 3 Phase: I 1 Phase: 0																									

① Dynamic inhibit: Protective function is enabled after the motor current goes above 150% and then falls below 125%.

② The delay between the occurrence of a PTC out-of-range fault and a trip of the CEP7 varies, but is generally described by one of the following: a) 500 ms ± 250 ms, typical; or b) < 6 seconds, for a PTC out-of-range fault present at power-up of the side mount module. Under no conditions should a PTC trip take longer than 6 seconds.


CEP7-EGF & CEP7-EGJ Wiring Diagrams ①

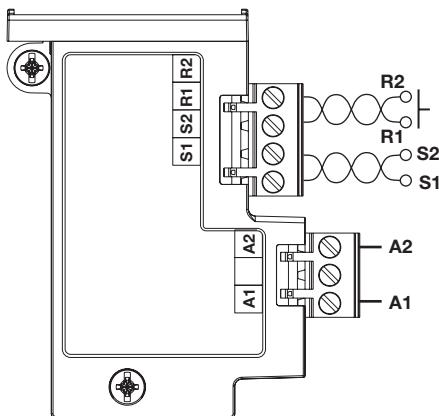

- Apply 24 - 240V, 47 - 63Hz or DC to terminals A1 and A2 for control power.
- Connect remote reset pilot device to Terminals R1 and R2
- Connect current sensor to Terminal S1 and S2

CEP7-EGF & CEP7-EGJ Installation ①

Ground Fault Sensor Control Wiring

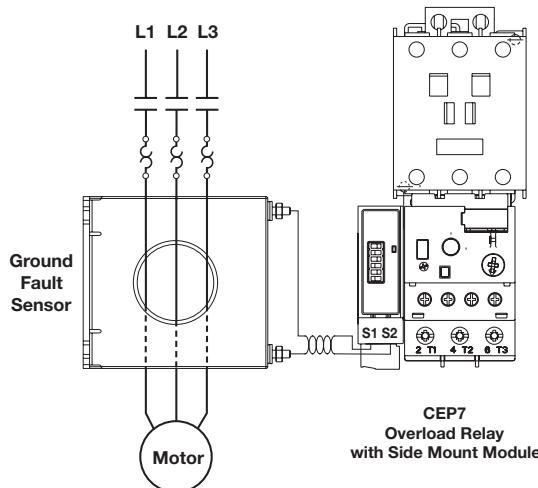

CEP7-EGF Operational LED

Status LED:

Steady Green - Module is powered up.

Flashing LED - The number of flashes followed by a pause identifies the specific trip code as follows:

- (1) Flash - overload trip
- (2) Flash - phase loss trip
- (3) Flash - ground fault trip

Fast Flash - Impending trip Ground fault detected and CEP7 not yet capable of tripping.

Steady Red - Hardware fault. Internal hardware fault detected and CEP7 trip attempted.

CEP7-EGF Dip Switch

Adjustment Settings

Overload Relay Reset Mode		
SW1	Manual: I	Automatic: 0

Ground Fault Current Range

	SW 2	SW 3
20...100mA	0	0
100...500mA	0	1
0.2...1.0A	1	0
1.0...5.0A	1	1

Ground Fault Trip Level

	SW 4	SW 5	SW 6
Disable/Off	0	0	0
20% Max GF Current	0	0	1
35% Max GF Current	0	1	0
50% Max GF Current	0	1	1
65% Max GF Current	1	0	0
80% Max GF Current	1	0	1
90% Max GF Current	1	1	0
100% Max GF Current	1	1	1

Overload Relay Type

SW7	3 Phase: I	1Phase: 0
SW8		Not Used

CEP7-EGJ Operational LED

Status LED:

Steady Green - Module is powered up.

Flashing LED - The number of flashes followed by a pause identifies the specific trip code as follows:

- (1) Flash - overload trip
- (2) Flash - phase loss trip
- (3) Flash - ground fault trip
- (4) Flash - jam trip

Fast Flash - Impending trip Ground fault detected and CEP7 not yet capable of tripping.

Steady Red - Hardware fault. Internal hardware fault detected and CEP7 trip attempted.

CEP7-EGJ Dip Switch

Adjustment Settings

Overload Relay Reset Mode		
SW1	Manual: I	Automatic: 0

Ground Fault Current Range

	SW 2	SW 3
20...100mA	0	0
100...500mA	0	1
0.2...1.0A	1	0
1.0...5.0A	1	1

Ground Fault Trip Level

	SW 4	SW 5	SW 6
Disable/Off	0	0	0
20% Max GF Current	0	0	1
35% Max GF Current	0	1	0
50% Max GF Current	0	1	1
65% Max GF Current	1	0	0
80% Max GF Current	1	0	1
90% Max GF Current	1	1	0
100% Max GF Current	1	1	1

Overload Relay Type

SW7	3 Phase: I	1Phase: 0
SW8		Jam Protection

SW8	Enable: I	Disable: 0
-----	-----------	------------

① Dynamic inhibit: Protective function is enabled after the motor current goes above 150% and then falls below 125%.

Electrical Data
Power Supply Ratings:

Rated Supply Voltage	U_s	24V DC
Rated Operating Range	U_e	20.4 - 26.4
Rated Supply Current	I_e	0.1 A
Maximum Surge Current at Power-Up		2.5 A
Maximum Power Consumption		2.5...2.7 W

Output Relay Ratings:

Terminals	
OUT A:	13/14
Type of Contacts	Form A SPST - NO
Rated Thermal Current	I_{th}
Rated Insulation Voltage	U_i
Rated Operating Voltage	U_e
Rated Operating Current	I_e
Minimum Operating Current	10 mA at 5V DC
Rating Designation	B300
Utilization Category	AC-15
Resistive Load Rating (p.f.=1.0)	5 A, 250V DC 5 A, 30V DC
Inductive Load Rating (p.f.=0.4), (L/R=7 ms)	2 A, 250V AC 2 A, 30V DC
Short Circuit Current Rating	1,000 A
Recommended Control Circuit Fuse	KTK-R-6 (6 A, 600V)

Input Ratings:

Terminals	
IN1:	1
IN2:	2
SSV (Sensor Supply Voltage)	3
Supply Voltage (Provided my module)	20.4 - 26.4V DC
Type of Inputs	Current Sinking

Jam Protection:

Trip Level	150...600% FLA
Trip Delay	0.1...25.0 sec.
Inhibit	0...250 sec.

Standards:


UL 508	
CSA 22.2, No. 14	
EN 60947-	

Mechanical Data

Ambient Temperature	T_{amb}
Storage	-40...+85°C (-40...+185°F)
Operating (Open)	-20...+60°C (-4...+140°F)
(Enclosed)	-20...+40°C (-4...+104°F)
Humidity	
Operating	5...95% non-condensing
Damp Heat - Steady State	per IEC 68-2-3
Damp Heat - Cyclic	per IEC 68-2-30
Maximum Altitude	2000 m
Degree of Protection	IP20



ETHERNET Communication

TCP Connection	150
CIP Connection	40
CIP Unconnected Messages	128
I/O Packet Rates	500/s
Explicit Packet Rates	500/s
Speed Duplex (Half/Full)	10/100
Duplicate IP Detection	Yes

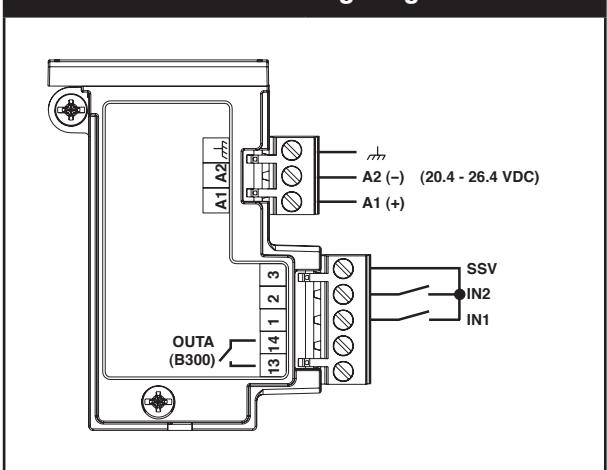CEP7-ETN Wiring Diagram


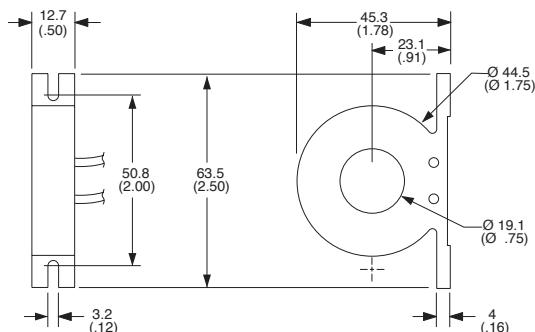
CEP7-CBCT Installation

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

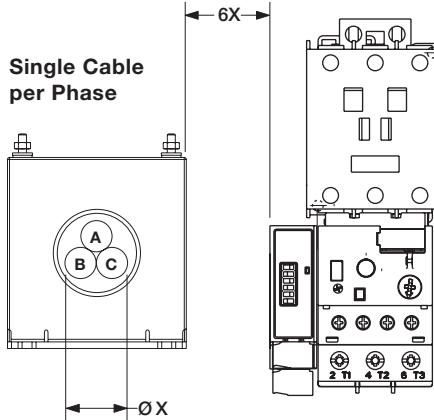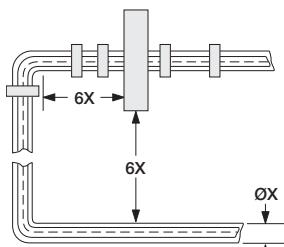


CEP7-CBCT Dimensions


CEP7-CBCT1



CEP7-CBCT2 & 3

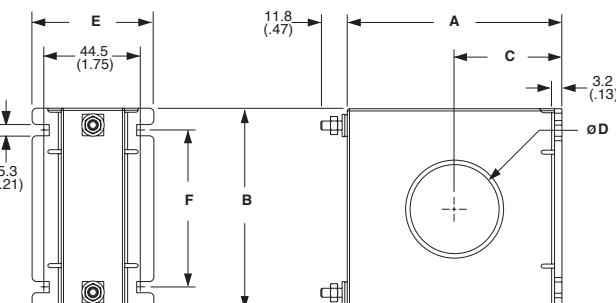

CEP7-CBCT4

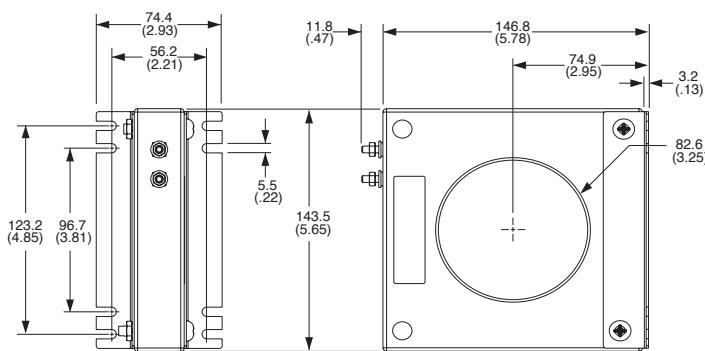

Catalog Number	A	B	C	ØD	E	F
CEP7-CBCT2	96 (3.78)	89 (3.53)	48.3 (1.90)	39.6 (1.56)	54.6 (2.15)	69.9 (2.75)
CEP7-CBCT3	122.4 (4.82)	115.9 (4.56)	59.7 (2.35)	63.5 (2.50)	54.1 (2.13)	96 (3.78)

CEP7-CBCT Ground Fault Trip Data

ATTENTION: The CEP7 Overload relay is not a ground fault circuit interrupter for personnel protection as defined in Article 100 of the NEC.

Ground fault trip delay: The delay between the occurrence of a ground fault and a trip of the CEP7 varies, but is generally described by one of the following:
 50 ms ± 20 ms, typical

< 6 seconds, for a ground fault present at power-up of the side mount module


< 30 seconds, if the protection inhibit has not been cleared.

Under no conditions should a ground fault trip take longer than 31 seconds.

Dynamic inhibit: Protective function is enabled after the motor current goes above 150% and then falls below 125%.

CEP7 Mounted to CA7 Contactor


Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

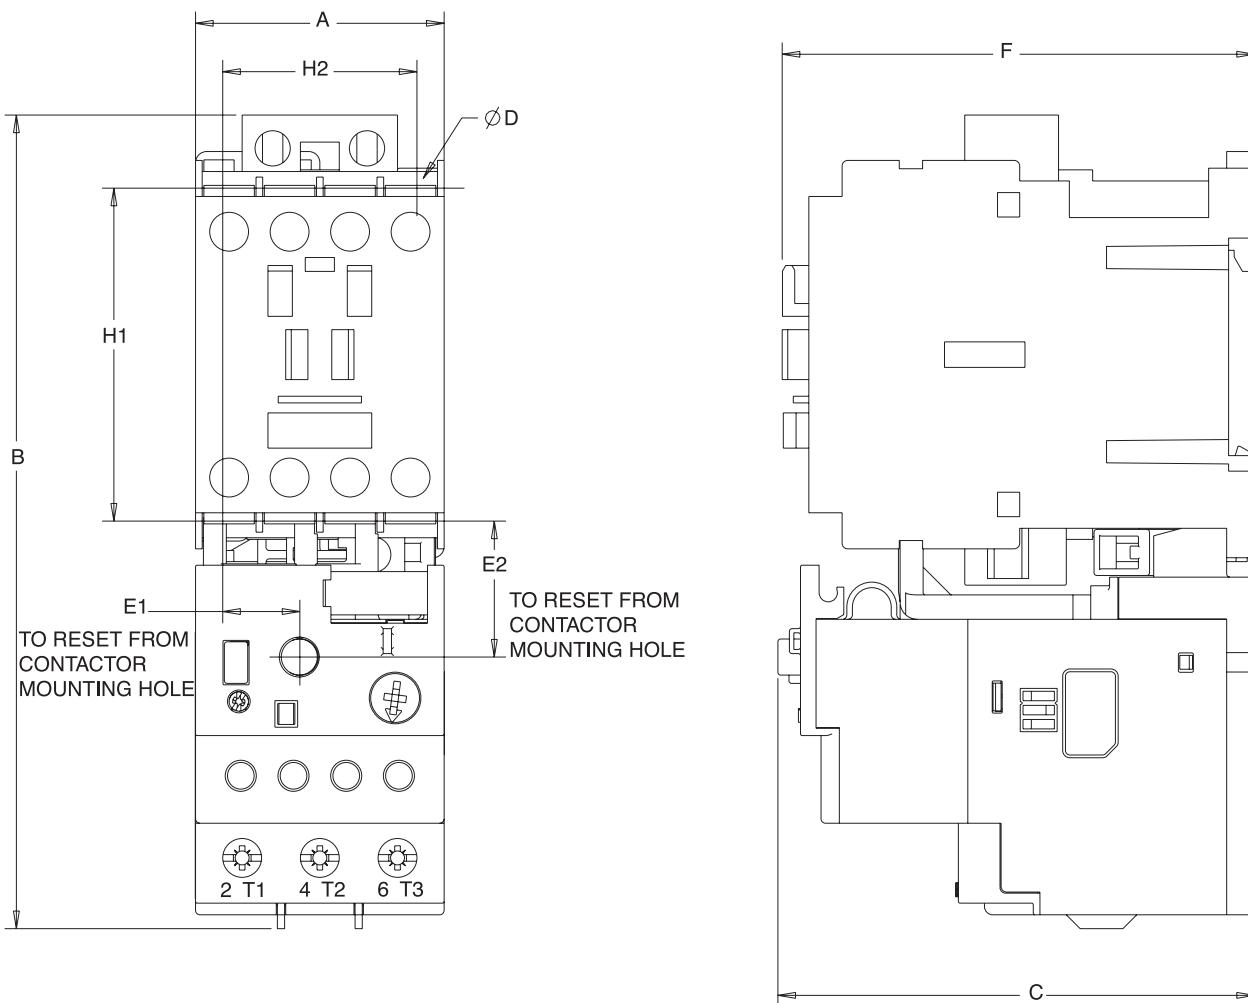


Overload	Mounted to Contactor		A Width	B Height	C Depth	D	E1	E2	F	H1	H2
CEP7-ED1...B CEP7-EE...B CEP7S-EE...B	CA7-9...23	mm (in)	45 (1-25/32)	146.6 (5-25/32)	85.2 (3-23/64)	4.5 (3/16)	13.9 (35/64)	24.5 (31/32)	86.5 (3-13/32)	60 (2-23/64)	35 (1-3/8)
CEP7-ED1...D CEP7-EE...D CEP7S-EE...D	CA7-30...37	mm (in)	45 (1-25/32)	146.6 (5-25/32)	101.2 (3-63/64)	4.5 (3/16)	13.9 (35/64)	24.5 (31/32)	104 (4-3/32)	60 (2-23/64)	35 (1-3/8)
CEP7-ED1...D CEP7-EE...D CEP7S-EE...D	CA7-43...55	mm (in)	54 (2-1/8)	146.6 (5-25/32)	101.2 (3-63/64)	4.5 (3/16)	18.9 (3/4)	24.5 (31/32)	107 (4-3/32)	60 (2-23/64)	45 (1-25/32)
CEP7-EE...E CEP7S-EE...E	CA7-60...97	mm (in)	72 (2-53/64)	192.3 (7-37/64)	120.4 (4-3/4)	5.4 (7/32)	23.8 (15/16)	29 (1-9/64)	125.5 (4-15/16)	100 (3-15/16)	55 (2-11/64)

CEP7 Pass-thru Overload

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

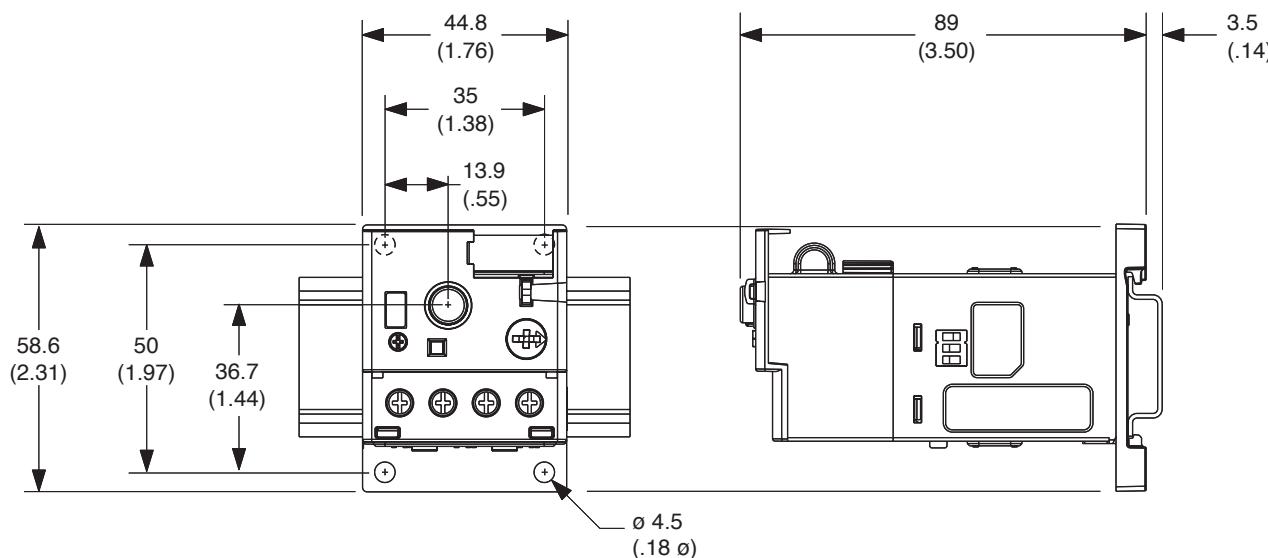



CEP7-ERID Remote Indicator

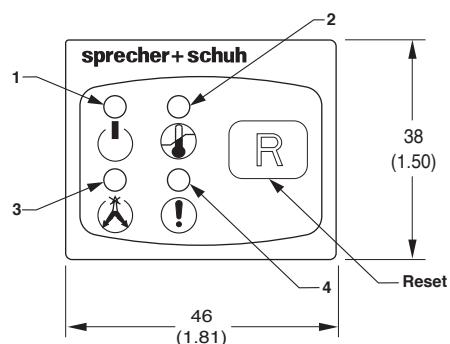

LED Indicators


L.E.D.	Function		Fault or Status	Flash Code
1	Module Power / Status		Module Power	Green (Flash)
			Module Power + Motor Current	Green (Solid)
			Hardware Fault	Red (Solid)
2	Overload		Overload Trip	Red (Solid)
			Overload Warning (> 110%)	Yellow (Flash)
3	Phase Loss		Phase Loss Trip	Red (Solid)
			Ground Fault Trip	1 Red
4	Fault Status		Jam Trip	2 Red
			PTC Trip	3 Red
			Fault Detected	Red (Rapid)

Operating Temperatures: -20°C ... 60°C (-4°F ... +140°F)
 Storage Temperatures: -40°C ... 85°C (-4°F ... +185°F)

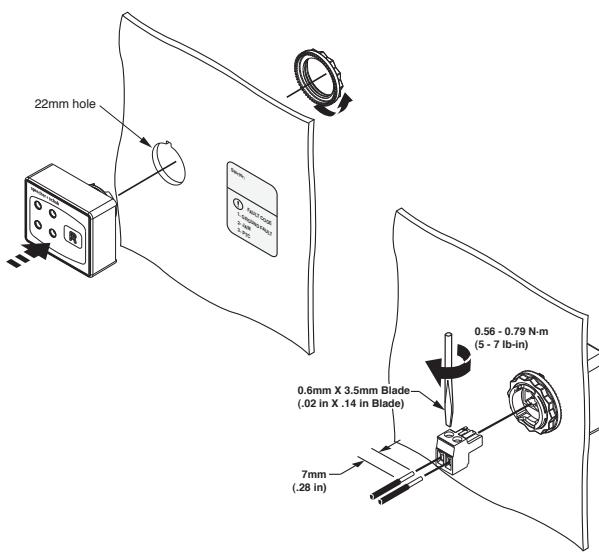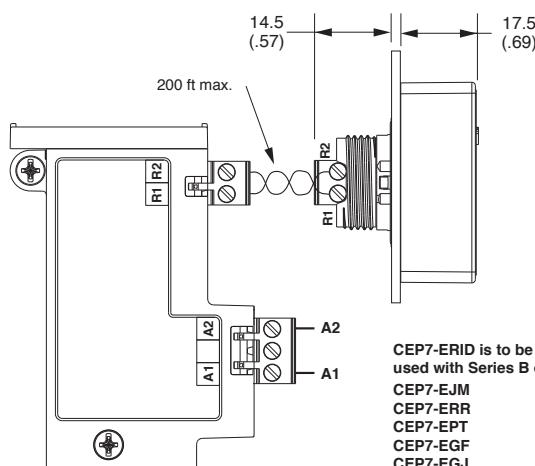

CEP7 Mounted to CA7 Contactor (with side mounted module)

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

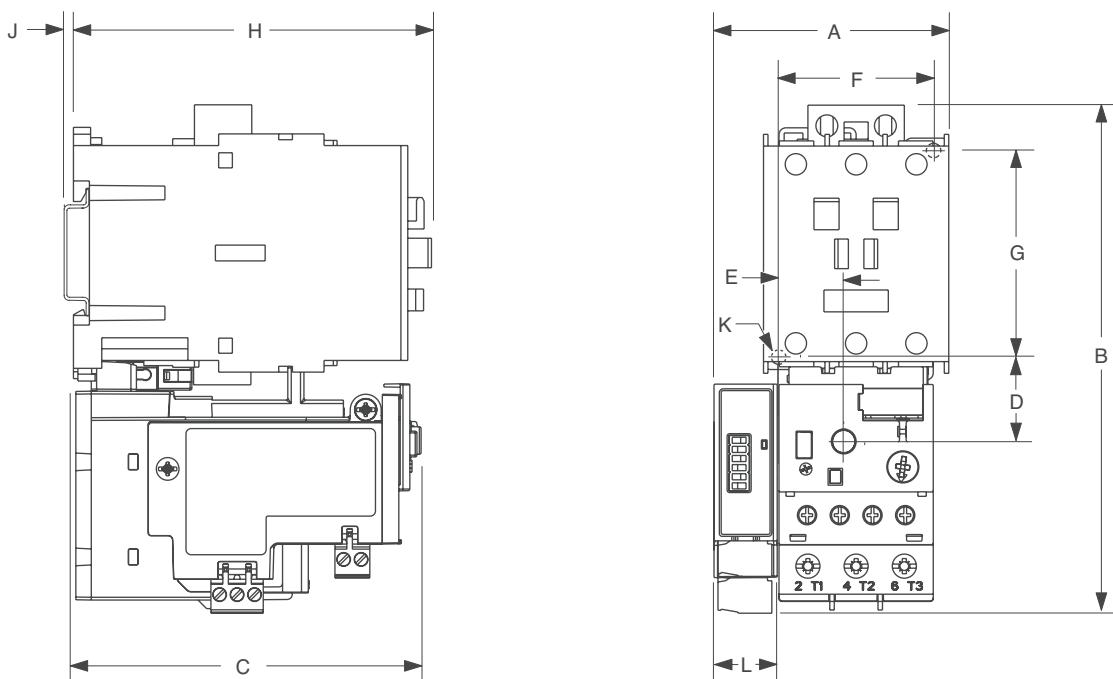




Contactor Cat. No.	Overload Cat. No.		A ①	B	C	D	E	F	G	H	J	K	L ①
CA7-9, CA7-12, CA7-16, CA7-23	CEP7*-EE_B	mm (in)	63 (2.48)	148 (5.83)	85.2 (3.35)	24.5 (.96)	13.9 (.55)	35 (1.38)	60 (2.38)	86.5 (3.40)	2 (0.8)	4.5 (.17)	18 (.71)
CA7-30, CA7-37	CEP7*-EE_D	mm (in)	63 (2.48)	148 (5.83)	101.2 (3.98)	24.5 (.96)	13.9 (.55)	35 (1.38)	60 (2.38)	104 (4.09)	2 (0.8)	4.5 (.17)	18 (.71)
CA7-43...55		mm (in)	67.5 (2.66)	148 (5.83)	101.2 (3.98)	24.5 (.96)	18.4 (.74)	45 (1.77)	60 (2.38)	107 (4.09)	2 (0.8)	4.5 (.17)	18 (.71)
CA7-60, CA7-72, CA7-85, CA7-97	CEP7*-EE_E	mm (in)	90 (3.54)	191.6 (7.54)	120.4 (4.74)	29 (1.14)	23.8 (.94)	55 (2.16)	100 (3.94)	126 (4.94)	2 (0.8)	5.4 (.21)	18 (.71)

* No letter indicates 3-phase; "S" indicates 1-phase

① Dimension shown covers all side mount modules EXCEPT CEP7-EPRB and CEP7-ETN, where "L" equals 22mm (0.86 in). Add 4mm (0.16 in) to dimension "A".

CEP7-ERR/EJM/EGE/EGJ/EPT Module Technical Information

Wire Size and Torque Specifications


	1X	24.....12 AWG
	2X	24.....16 AWG 5 lb-in
	1X	0.2.....2.5 mm ²
	2X	0.25.....1 mm ² 0.55 N·m
	1X	0.2.....2.5 mm ²
	2X	0.2.....1 mm ² 0.55 N·m

- Connect remote reset pilot device to Terminals R1 and R2.
- Do not apply external voltage to R1 and R2. Equipment damage will occur.
- Recommend use of twisted pair for remote reset, #24 AWG minimum.
- Apply 24 - 240V, 47 - 63Hz or DC to terminals A1 and A2 for control power.
- Rated Insulation Voltage (Ui) 300V
- Rated Operating Voltage (Ue) 24 - 240 VAC, 50/60 Hz
24 - 240 VDC
- Power at Rated Operating Voltage (Typical)

24 VAC	0.8 W
120 VAC	0.8 W
240 VAC	1.0 W
- Rated Impulse Withstand Voltage (U_{imp}) 2.5 kV
- Dynamic inhibit on start. A unique circuit within the CEP7 Protection Modules monitors for motor starting inrush current. The circuit inhibits the protection feature during the motor start period and arms the protection function after the inrush current falls to motor rated current. This allows the motor to start and run, avoiding nuisance tripping during the inrush period.

CEP7 with CEP7-EP... Panel Mount Adaptor

Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

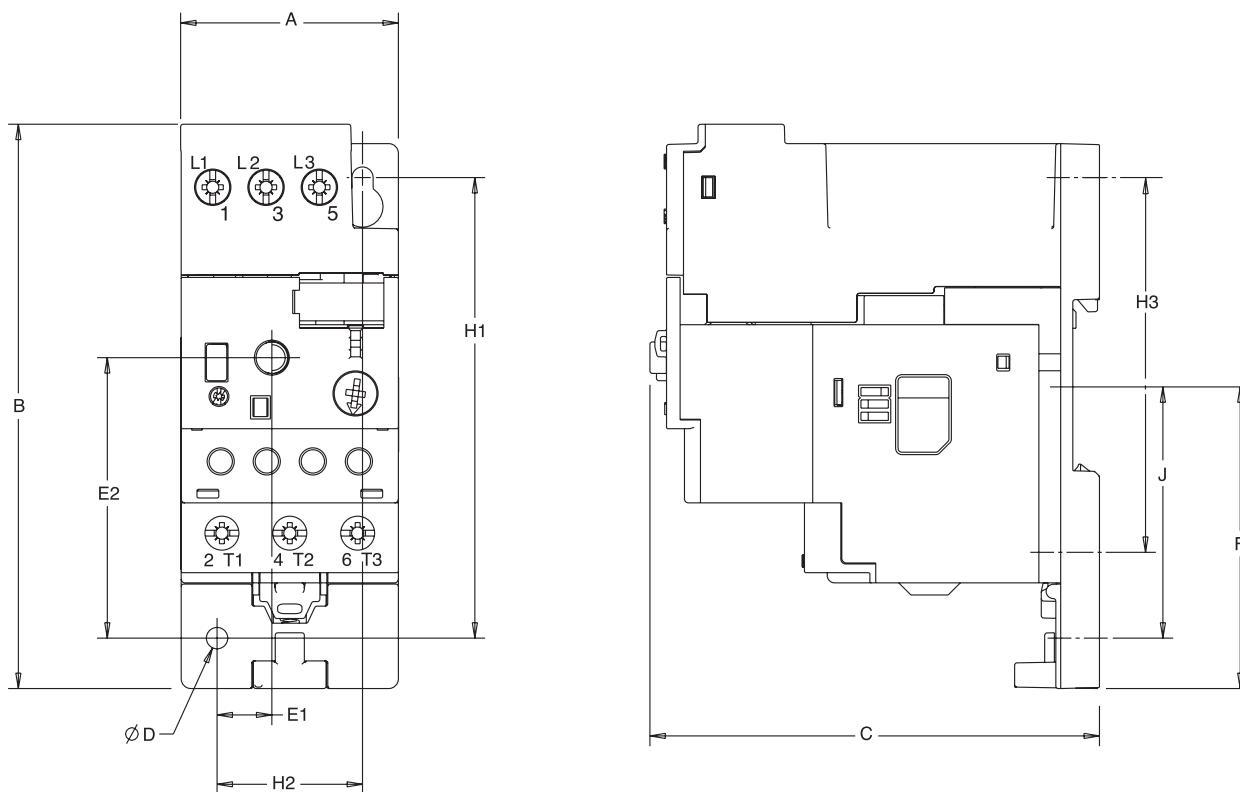


Panel Mount Adaptor	Overload Relay	A Width	B Height	C Depth	D	E1	E2	F	H1	H2	H3	J
CEP7-EPB	CEP7-ED1_B CEP7-ED_B CEP7(S)-EE_B	45 (1-25/32)	116.5 (4-9/16)	92.7 (3-21/32)	4.4 (11/64)	11.4 (29/64)	57.9 (2-9/32)	62.5 (2-15/32)	95 (3-3/4)	30 (1-3/16)	75 (2-31/32)	52.1 (2-3/64)
CEP7-EPD	CEP7-ED1_D CEP7(S)-EE_D	45 (1-25/32)	112.4 (4-7/16)	108.7 (4-9/32)	4.4 (11/64)	11.4 (29/64)	57.9 (2-9/32)	62.5 (2-15/32)	95 (3-3/4)	30 (1-3/16)	75 (2-31/32)	52.1 (2-3/64)
CEP7-EPE	CEP7(S)-EE_E	72 (2-53/64)	107.4 (4-15/64)	127 (5-1/64)	5.5 (5/32)	26.4 (3/4)	54.5 (2-9/64)	48.3 (1-29/32)	90 (3-23/64)	60 (2-23/64)	~	43.3 (1-45/64)

DIN-rail / Panel Adapter Terminal Cross Sections		CEP7-EPB ①	CEP7-EPD ①	CEP7-EPE
Flexible stranded with ferrule	Single conductor	1.0...4.0mm ²	2.5...16mm ²	4.0...35mm ²
	Torque	1.8 Nm	2.3 Nm	4.0 Nm
	Two conductor	1.0...4.0mm ²	2.5...10mm ²	4.0...25mm ²
	Torque	1.8 Nm	2.3 Nm	4.0 Nm
Course stranded / solid	Single conductor	1.5...6.0mm ²	2.5...25mm ²	4.0...50mm ²
	Torque	1.8 Nm	2.3 Nm	4.0 Nm
	Two conductor	1.5...6.0mm ²	2.5...16mm ²	4.0...35mm ²
	Torque	1.8 Nm	2.3 Nm	4.0 Nm
Stranded / solid	Single conductor	14...8 AWG	16...6 AWG	12...1 AWG
	Torque	16 lb-in	20 lb-in	35 lb-in
	Two conductor	14...10 AWG	16...6 AWG	12...2 AWG
	Torque	16 lb-in	20 lb-in	35 lb-in


① For multiple conductor applications, the same size and style of wire must be used.

CEP7 Current Transformer Models mounted to CA9 Contactor (116-205A)




Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.

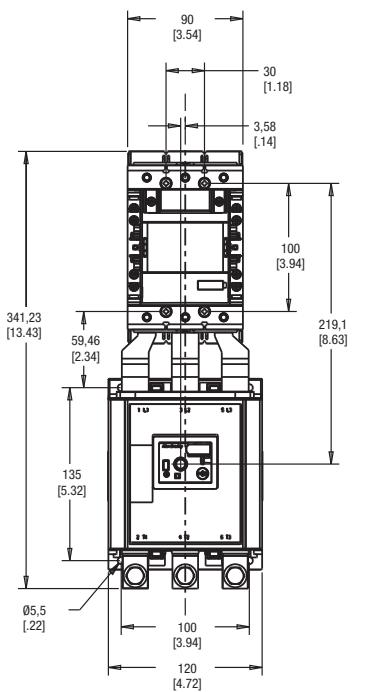

CA9-116 AND CA9-146 CONTACTORS SHOWN

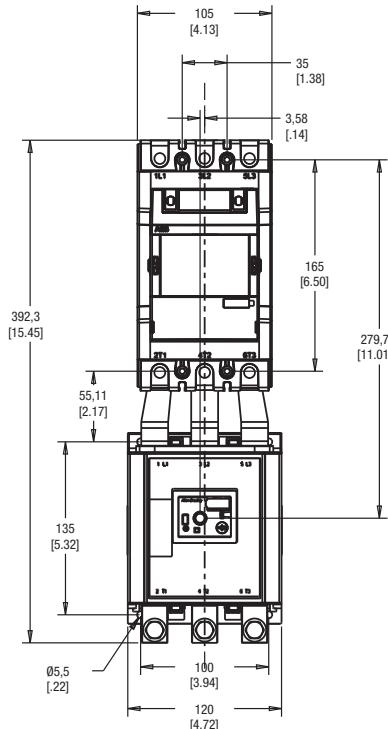


CA9-190 AND CA9-205 CONTACTORS SHOWN

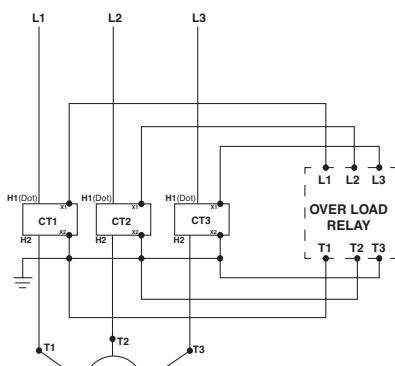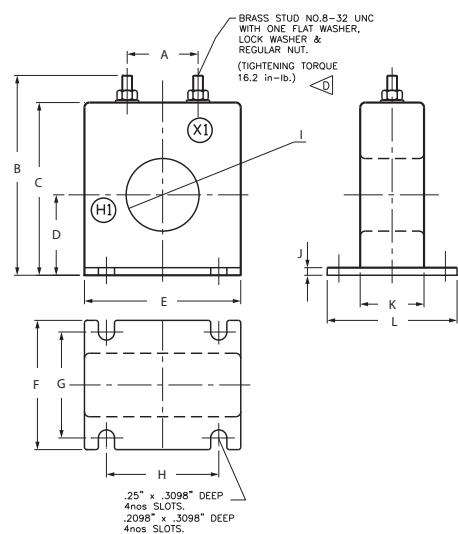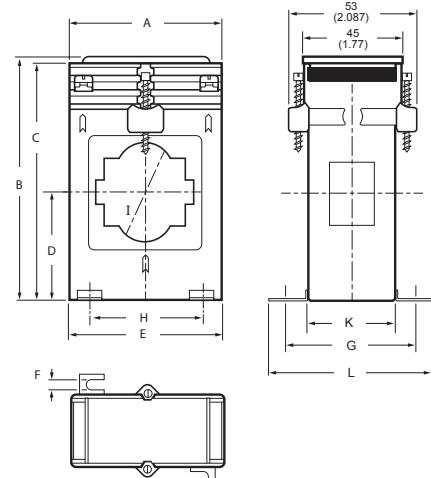CEP7-CT
CEP7-CT-UL

CEP7-CT-CE


DIMENSIONS mm (inches)	A	B	C	D	E	F	G	H	I	J	K	L
CEP7-CT-UL-300	27.29 (1.09)	79.5 (3.13)	68.6 (2.7)	32.5 (1.27)	60.96 (2.40)	50 (1.96)	40.4 (1.59)	44.45 (1.75)	29 (1.14)	3 (0.118)	24 (0.94)	50 (1.96)
CEP7-CT-UL-600	83.31 (3.28)	134.4 (5.29)	123.2 (4.85)	59.4 (2.34)	115.8 (4.56)	54.1 (2.13)	44.45 (1.75)	96 (3.78)	63.5 (2.50)	4.3 (0.17)	27.4 (1.08)	54.1 (2.13)
CEP7-CT-CE-300	71 (2.80)	88.5 (3.48)	85.5 (2.7)	36.75 (1.27)	70 (2.75)	6.5 (0.26)	57 (2.24)	50 (1.97)	32 (1.26)	40 (1.58)	72 (2.83)	
CEP7-CT-CE-400	96 (3.75)	108.5 (4.27)	105.5 (4.85)	48.3 (1.90)	95 (3.74)	4.5 (0.177)	57 (2.24)	70 (3.75)	44 (1.73)	~	40 (1.58)	72 (2.83)

CEP7 Current Transformer Models mounted to CA6 Contactor (Discontinued)

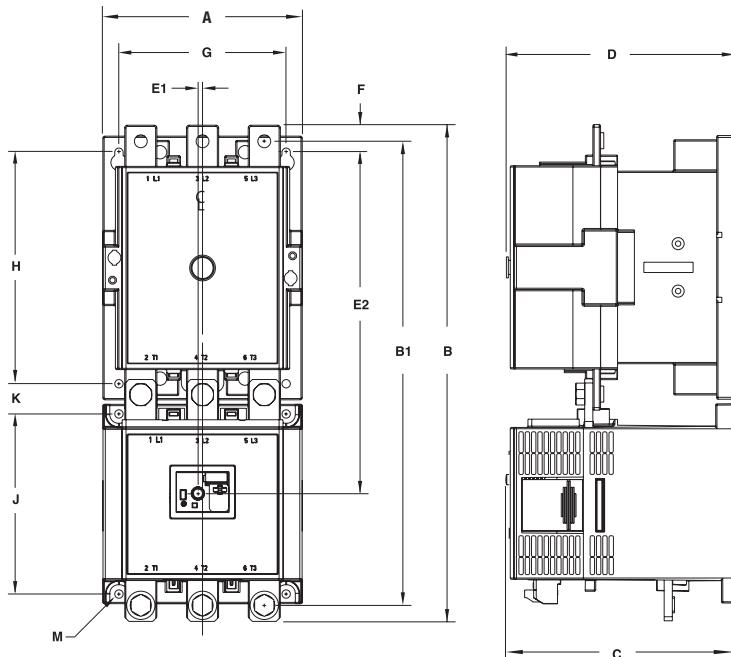
Dimensions are in millimeters (inches). Dimensions not intended for manufacturing purposes.



Overload Relay Cat.	Contactor Cat.	A Width	B Height		B1	C Depth	D	E1	E2	F	G	H	J	K	M
			Without Terminal Covers	With Terminal Covers		Reset									
CEP7-EEHF	CA6-115 (E1)	120	339.8	418	317.8	152.7	156	36	226.3	16	100	145	22.3	5.6	
CEP7-EEJF	CA6-140 (E1)	(4.72)	(13.38)	(16.46)	(12.51)	(6.01)	(6.14)	(.14)	(8.91)	(.63)	(3.94)	(5.71)	(.88)	(0.22)	
CEP7-EE_G	CA6-210 E1	155	385.8	487.4	360.8	176.5	180	36	265.5	21	130	180	23.5	6.5	
	CA6-300-E1	(6.10)	(15.19)	(19.19)	(14.2)	(6.95)	(7.09)	(.14)	(10.44)	(.83)	(5.12)	(7.09)	(5.51)	(.93)	(0.26)
CEP7-EE_H	CA6-630 E1	255	552	915	508	269.3	270.7	36	384.1	52.5	226	230	108	109	13 (0.51)
	CA6-860 E1	(10.04)	(21.73)	(36.02)	(20)	(10.6)	(10.66)	(.14)	(15.12)	(2.07)	(8.90)	(9.06)	(4.25)	(4.29)	

Assembly Instructions

CEP7-EE_F: (M5)
 3.4 N_Zm (30 lb-in)
 CEP7-EE_G: (M6)
 5.1 N_Zm (45 lb-in)
 CEP7-EE_H: (M12 Provided)
 17 N_Zm (150 lb-in)

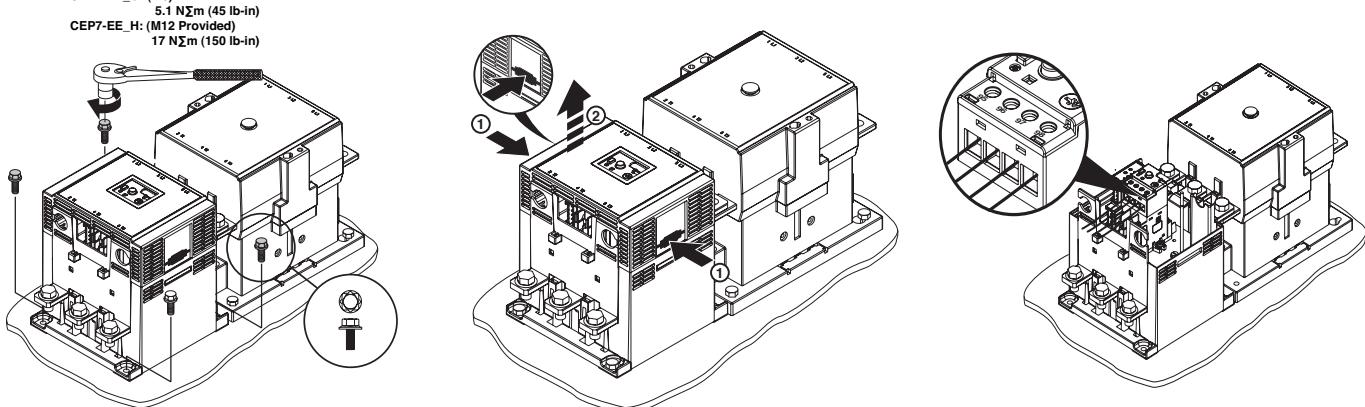

① 8 mounting holes.

Notes

B

CEP7 Overloads