



Traditional Wall Pack

WP Select-LED



This high-performance traditional wall pack is engineered for maximum versatility and ease of installation, making it ideal for both new construction and retrofit jobs. Features lumen output & CCT selection switch; integrated photocell sensor switch; and on-site beam distribution selection switch to easily select from different beam angles for optimized lighting. Offers Bluetooth mesh wireless control with streamlined commissioning and maintenance.

IDEAL APPLICATIONS

- ✓ Perimeter Areas

✓ Entrances

✓ Loading docks
- ✓ Commercial buildings

✓ Schools

SPECIFICATIONS

	WP-LED40A20	WP-LED80A40	WP-LED120A80
PERFORMANCE			
Light Output	6000*/4500/3000 lm	12300*/9300/6200 lm	18000*/15000/12000 lm
Efficacy*	149 lm/W	154 lm/W	150 lm/W
CCT	CCT Selectable - 3000K/4000K*/5000K		
Beam Distribution	Variable Distribution (110°/90°*/60°)		
Replaces up to	175W MH	250W MH	400W MH
LED Lifetime (L80)	>100,000 Hours		
CRI	84	85	84
ELECTRICAL			
Wattage	40W/30W/20W	80W/60W/40W	120W/100W/80W
Voltage	120-347 V		
Surge Protection	6kV (Built-in Driver) as per IEC/EN61000-4-5		
Power Factor	≥0.9		
THD	≤15%		
MAX AMPERAGE DRAW (A)			
120V	0.35 A	0.70 A	1.05 A
208V	0.20 A	0.40 A	0.61 A
240V	0.18 A	0.35 A	0.53 A
277V	0.15 A	0.30 A	0.46 A
347V	0.12 A	0.24 A	0.36 A
AMBIENT OPERATING TEMPERATURE			
Fixture	-40°C to +50°C (-40°F to 122°F)		

CERTIFICATIONS		
cULus Listed for Canada and USA, per UL 1598, CSA C22.2 No. 250.0		
DLC Premium		
Wet location rated		
CONTROLS		
Dimming	0-10V (10% to 100% Continuous Dimming, Dim to Off)	
Sensor	Photocell*	
	DHFS - Dimming High Frequency Sensor**	
	PCLS - Photocell CCT Lumen Sensor**	
	BC - Bluetooth Controlled**	
LUMEN MAINTENANCE		
L90	L80	L70
>50000 Hours	>100000 Hours	>100000 Hours
CONSTRUCTION		
Housing	Die Cast Aluminum	
Conduit Entries	Four 1/2" NPT on sides, One 1/2" NPT on back side	
Accessories	Visor, Wire Guard, Wire Cage	
Lens	Borosilicate Glass	
Finish	Bronze*, Matte Black, Custom Finish	
Paint Specs	Weather & corrosion resistant polyester powder coated. 500 hours salt spray tested paint as per ASTM B117	
Weight	7.50 lbs	

*Default Setting: Highest wattage/ 4000K /90° Beam
 **Factory Installed

Note: Electrical and Light Performance data is based on LM79 test report at 4000K, 90° and 120V.
 Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 calculations.



ORDERING GUIDE

WP		H	VK	VD		DIM		
Fixture	Wattage	Voltage	Colour Temp.	Beam Distribution	Finish	Dimming	Controls	Options
WP	LED40A20 LED80A40 LED120A80	H - 120-347V	VK - CCT Selectable (3000K/ 4000K*/ 5000K)	VD - Beam Adjustable (110°/90°*/60°)	BRZ - Bronze* BLK - Matte Black CST - Custom Colour	DIM - 0-10V Dimming	PC - Photocell * BC - Bluetooth Controlled PCLS - Photocell-CCT-Lumen Sensor DHFS - Motion Sensor	BLANK - No External Surge Protector SP10 - 10kV Surge Protector**


* Standard Configuration

** Standard for WP-LED120A80


STOCK CODE

084316	WP-LED40A20-H-VK-VD-BRZ-DIM-PC
084317	WP-LED80A40-H-VK-VD-BRZ-DIM-PC
084318	WP-LED120A80-H-VK-VD-BRZ-DIM-PC-SP10



ACCESSORIES SOLD SEPARATELY

084351	WP-LED-VD CUTOFF VISOR BRZ		087016	RC-100 MOTION SENSOR REMOTE CONTROL	
084352	WP-LED-VD WIRE GUARD		087034	RC-107 PHOTOCONTROL REMOTE CONTROL	
098710	WP WIRE CAGE CHROME PLATED STEEL				


WALL PACK

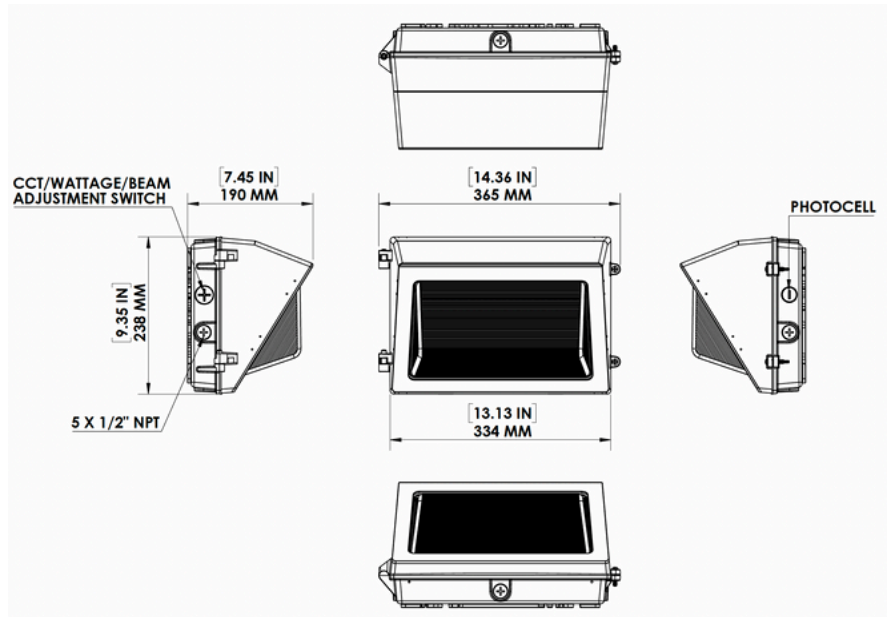


CUTOFF VISOR

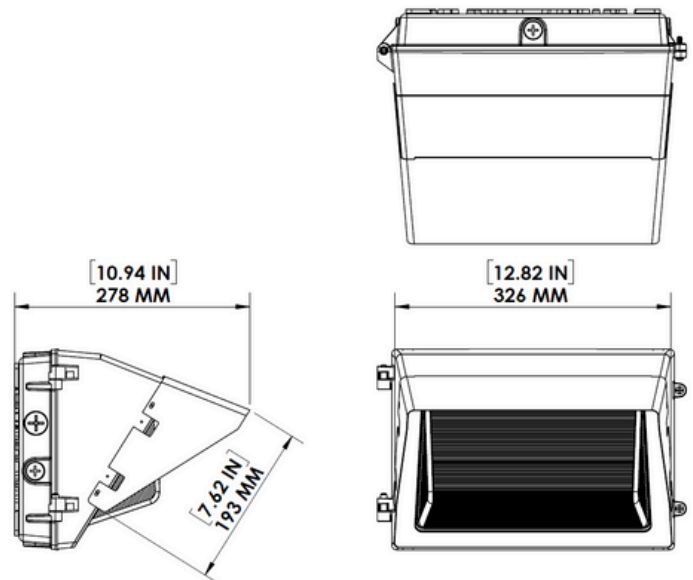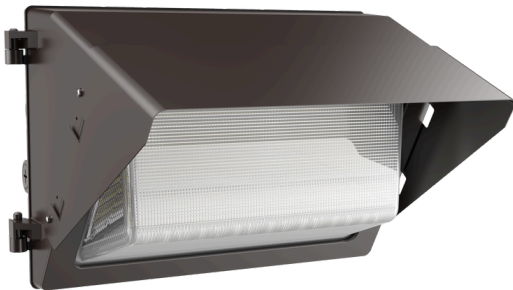

WIRE GUARD

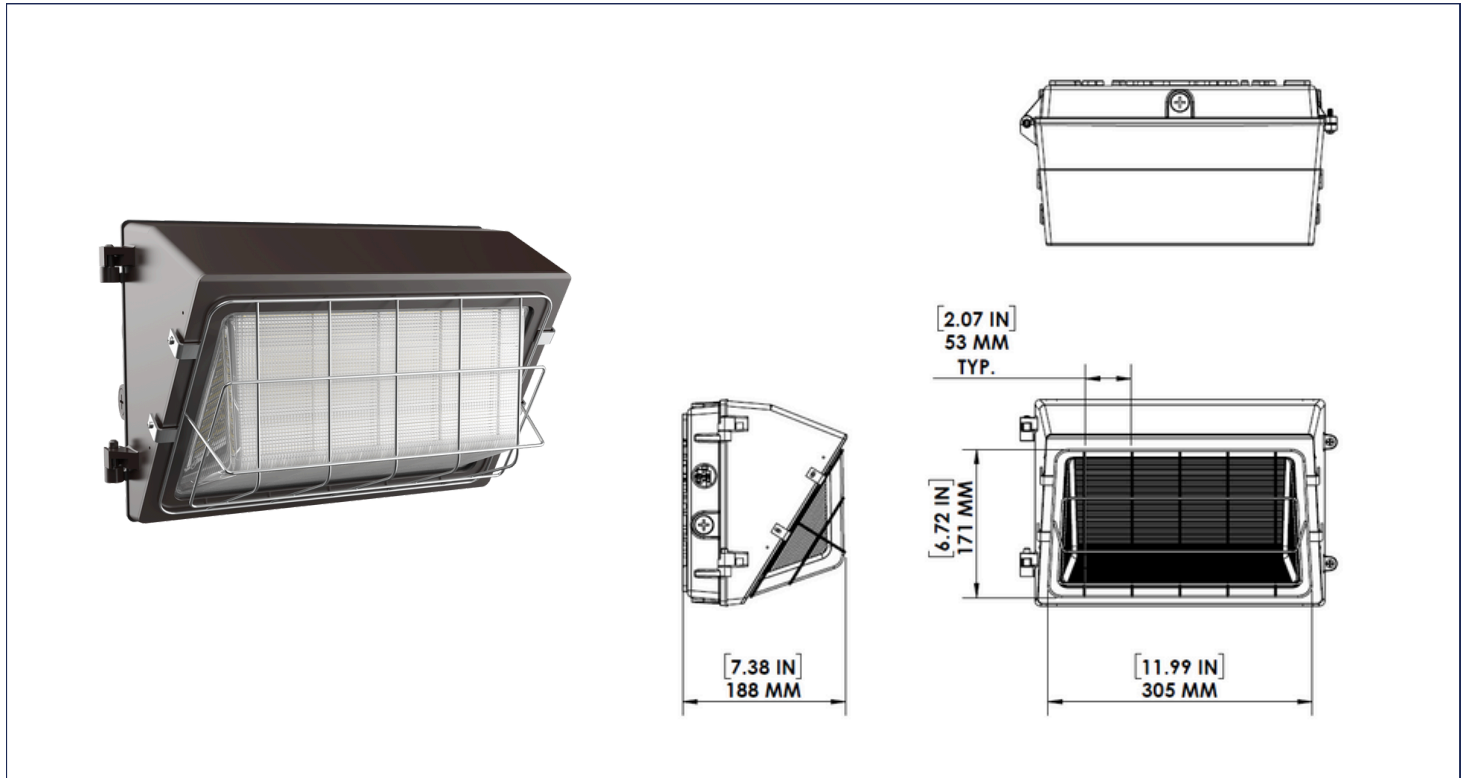

WIRE CAGE

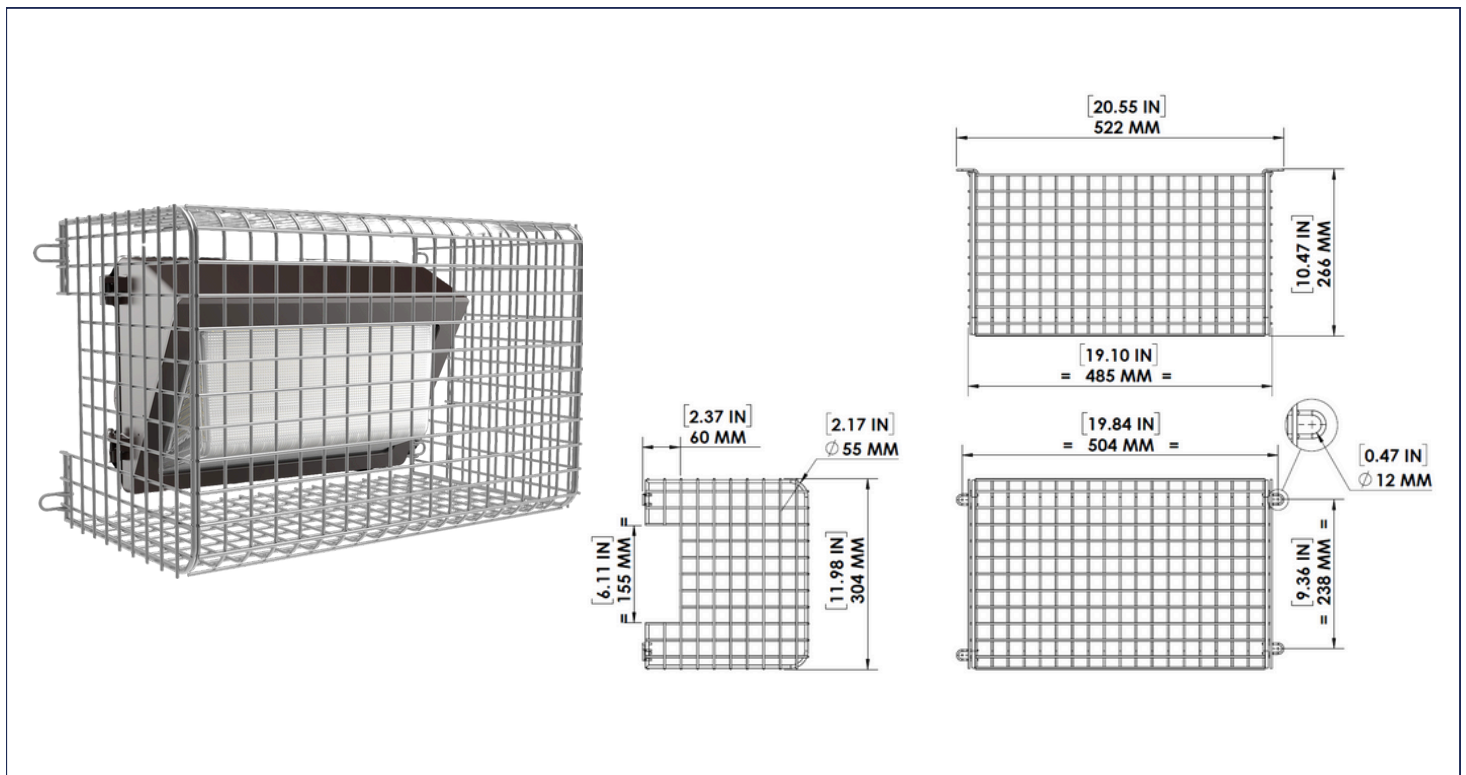

PHOTOCELL/CCT/LUMEN SENSOR (PCLS)

PCLS Controller allows the Installer to adjust colour temperature, brightness, and photocontrol settings using a remote control after installation.



PHOTOCELL/CCT/LUMEN SENSOR (PCLS)

Input Power	LED Input: Max. 250VDC 3A; Sensor Input: 10-14VDC, >30mA
Input Current	Max. 25mA
Control Output	0-10V Output Signals
Operate Level	10-20LUX ON, 30-80LUX OFF
Ambient Temperature	99% RH
Operating Temperature	-40°C to +70°C (-40°F to +158°F)

RC107 REMOTE SEPCIFICATIONS (For PCLS Controller)

DEFAULT FACTORY SETTING		FEATURES	
Task Light Level	100%		ON: Turn on the fixture, brightness is set according to task level. OFF: Turn off the fixture, the fixture is permanently off. RESET: Task Light Level:100%; Hold Time: Disable; Photocell: Low; CCT:CCT Low (WW - 3000K) REPEAT: Send the same setting to different fixtures installed.
Hold Time	Disable		DIM+: With each push of the button, brightness increases by 10%. DIM-: With each push of the button, brightness decreases by 10%; HOLD TIME: The "hold time" starts to count right after the fixture turns on. When the "hold time is up, the fixture adjusts to 50% brightness until the light control turns the light fixture off. DISABLE: When you choose disabled, the fixture maintains the task light level
Photocell	Low		LOW: When the ambient lux is less than 30lux, the fixture turn on at the task level you set, when the ambient lux is more than 50lux, the fixture turns off. MIDDLE: When the ambient lux is less than 80lux, the fixture turn on at the task level you set, when the ambient lux is more than 100lux, the fixture turns off. HIGH: When the ambient lux is less than 150lux, the fixture turn on at the task level you set, when the ambient lux is more than 180lux, the fixture turns off; DISABLE: Photoelectric switch disabled:
CCT	CCT - NW (4000K)		CCT : Adjust CCT(WW - Warm White/3000K, NW - Neutral White/4000K, CW - Cool White/5000K)

Note: Custom settings can be done based on requirements in the Factory.

DIMMING HIGH FREQUENCY MOTION SENSOR (DHFS)

DHFS Microwave motion sensor offers a range of control features based on motion detection allowing the Installer to adjust the brightness of the fixture, hold time and daylight settings using a remote control after installation.


SENSOR SPECIFICATIONS	
POWER SUPPLY	12V-24V DC
HIGH FREQUENCY SYSTEM	5.8GHZ +/-75MHZ
DIM CONTROL OUTPUT	0-10V, MAX. 25MA
DETECTION RADIUS/ANGLE	MAX 26FT (8M)/360°
MOUNTING HEIGHT	MAX 40FT
REMOTE RANGE	50FT. (15M) NO BACKLIGHT
HUMIDITY	MAX. 90% RH

DEFAULT FACTORY SETTING	
BRIGHTNESS	100%
SENSITIVITY	100%
HOLD TIME	5 MINS
DAYLIGHT SENSOR	☼ - DISABLED
STAND-BY DIM	30%
STAND-BY TIME	60 MINS



RC100 REMOTE SPECIFICATIONS (FOR DHFS CONTROLLER)

FEATURES

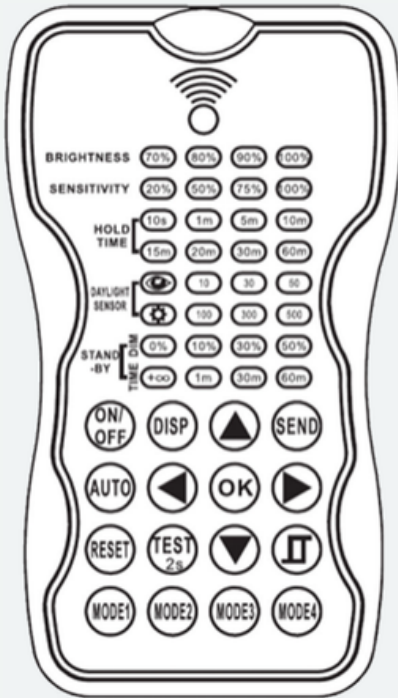

BRIGHTNESS: Sets the highest light fixture brightness when motion is detected.

SENSITIVITY: Sets the sensitivity to which the sensor will detect motion.



HOLD TIME: The time the light fixture will remain at the brightness setting after it detects motion.

DAYLIGHT SENSOR: The lux setting that the light fixture will turn on/off. If the ambient lux is more than the defined lux setting, the fixture & sensor function will turn off and remain off until the ambient lux is below the setting. To disable the lux sensor, select the SUN icon. To set the lux to match current room conditions, select the EYE icon.




STAND-BY DIM: The Dim level that the light fixture will dim down after the Hold Time has expired. To disable dimming and only have ON/OFF, select the 0% icon

STAND-BY TIME: The time the light fixture will remain in the dim down state before it shuts off. To disable the light from shutting off, select the INFINITY icon.

SENSOR COVERAGE

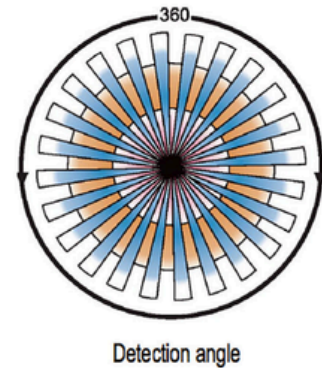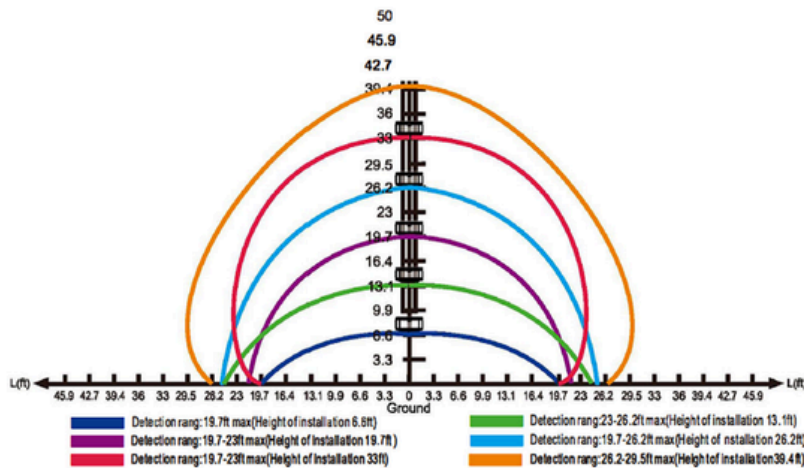


PHOTOMETRIC PLOTS

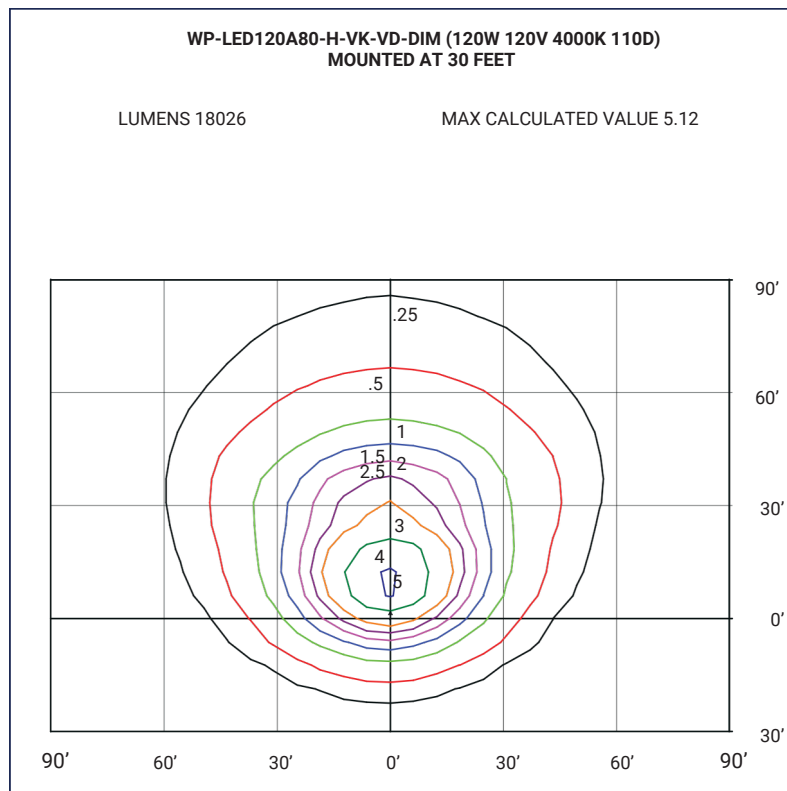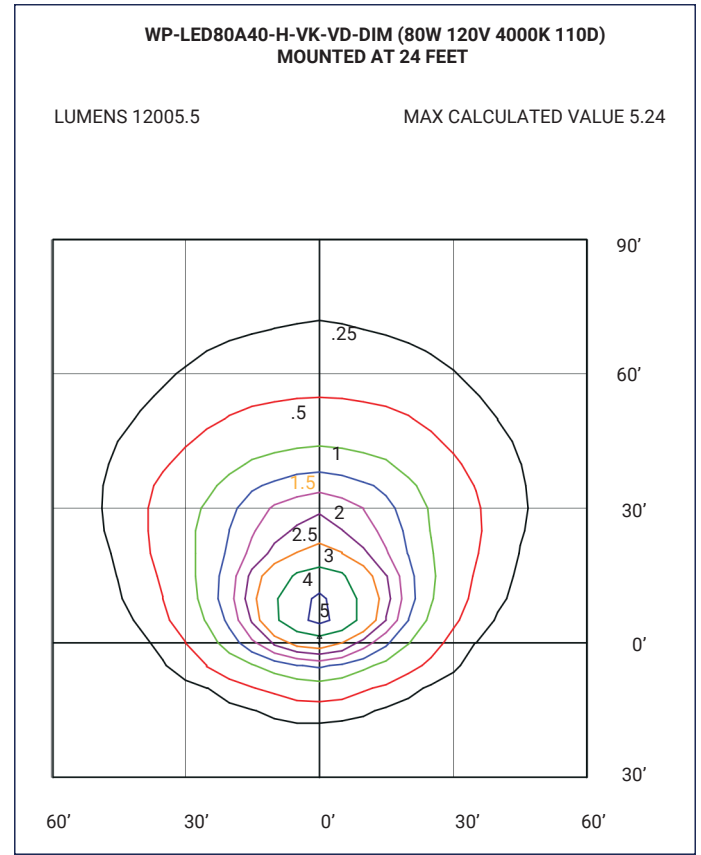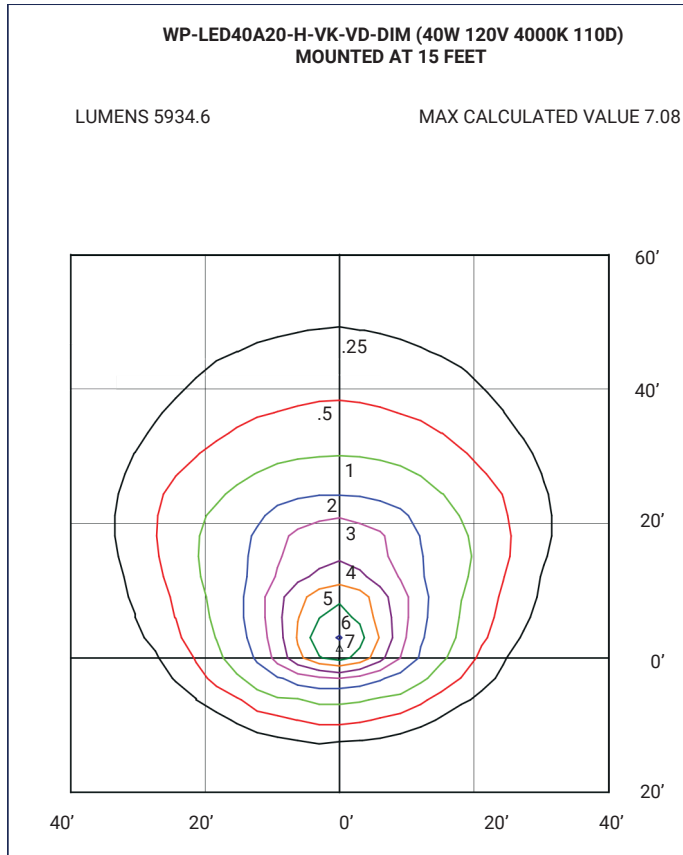

CONTROLLED

RAB
DESIGN

ControlLED Network Lighting Controls (NLC) delivers secure, wireless lighting management with Bluetooth Mesh and the ControlLED App. Integrated sensors enable automatic adjustments for comfort, safety, and efficiency.

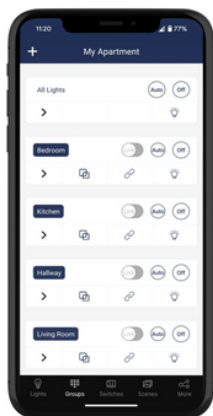

Organized Areas:
Create Zones, Groups and Group linkages.



Dimming Lights:
Set dim level for groups or individual lights.



Scenes:
Create custom scenes for different scenarios.



Schedules:
Create custom schedules for recurring events.



Share Access:
Share access using QR codes.

BLUETOOTH CONTROL

FEATURES

- Bluetooth mesh network
- DLC - Networked Lighting Control (NLC) & Luminaire Level Lighting Control (LLLC)
- Group and Individual fixture dimming
- Scenes & Schedules

SPECIFICATIONS

Input Voltage	12 VDC
Input Current	Min 150mA
Output Current	10mA Max.
Dimming	Class 2, 0-10 VDC
Bluetooth Transmit	860ft Max.
Radio Frequency	2.4GHz $\pm$ 75MHz
Bluetooth Version	5.0

Get the App!

