



MT/MQ/MQM Series

Micro tungsten lamps, micro-quartz lamps or MR16 lamps

Project/Location: _____

Contractor: _____

Date: _____

Prepared by: _____

Lumacell Model: _____


FEATURES

- Compact design
- 6, 12 and 24V with various wattages
- Variable light patterns using adjustable lens
- Fire-retardant thermoplastic
- Available with tungsten, quartz lamps or MR16
- 300° rotation
- CSA certified to C22.2 No. 141



DIMENSIONS

Dimensions are approximate and subject to change.

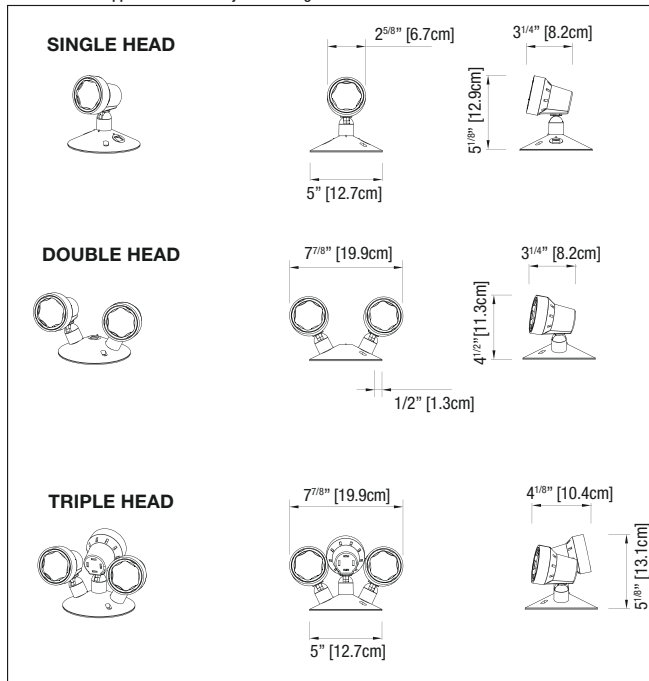

TYPICAL SPECIFICATIONS

Lamp head and stem shall be injection molded, impact resistant, flame retardant thermoplastic and shall require no tool for aiming or adjustment. The lens shall be inverse concave design and fully adjustable for aisle or area distribution during installation without the need to energize the lamp. Visual identification of distribution shall be provided through position of adjustment pins.

Fixture shall be supplied with a canopy for installation on any four inch octagon box. Housing shall be designed to allow for lamp replacement if required.

The remote unit shall be the Lumacell® model: M _____.

WIRE GUARDS

460.0029-L	Wall ceiling Mount
------------	--------------------

REPLACEMENT LAMPS

MODEL	AC SPECS	DC SPECS
570.0016-L	Tungsten	6V-9W
570.0045-L	Tungsten	24V-9W
570.0015-L	Halogen (quartz)	12V-12W
580.0097-L	LED	6V-4W
580.0093-L		12V-4W
580.0098-L		24V-4W

See the complete list p. 144 to 146.

ORDERING INFORMATION

SERIES	LAMP TYPE	NUMBER OF HEADS	VOLTAGE/WATTAGE/LAMP TYPE	COLOURS	
M = micro, PAR 18	T = tungsten, wedge base Q = halogen, quartz bi-pin QM = halogen, MR16 LED	1= single head 2= double head 3= triple head	6V9W = 6V-9W tungsten, wedge base 12V9W = 12V-9W tungsten, wedge base 12V18W = 12V-18W tungsten, wedge base 24V9W = 24V-9W tungsten, wedge base 24V18W = 24V-18W tungsten, wedge base 6V8W = 6V-8W, quartz bi-pin 6V12W = 6V-12W, quartz bi-pin 12V8W = 12V-8W, quartz bi-pin 12V12W = 12V-12W, quartz bi-pin	6V6W = 6V-6W, MR16 6V10W = 6V-10W, MR16 12V12W = 12V-12W, MR16 12V20W = 12V-20W, MR16 24V12W = 24V-12W, MR16 24V20W = 24V-20W, MR16 LD1 = 6V-4W, MR16 LED LD7 = 12V-4W, MR16 LED LD9 = 12V-5W, MR16 LED LD13 = 24V-4W, MR16 LED	Blank = factory white BK = black

EXAMPLE: MT16V9W