




## ezINTERLOCK™ | Indoor-Outdoor Loose Tube Cables

Riser and plenum rated cables

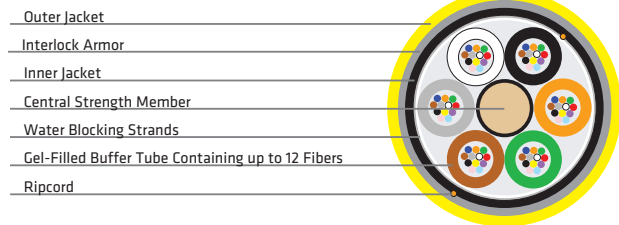

Incorporation of a formed, metallic armor outer layer enhances Prysmian's popular indoor-outdoor loose tube cables to enable superior crush resistance while ensuring maximum flexibility.

### Overview

Prysmian's ezINTERLOCK™ loose tube cable family packages up to 288 color coded optical fibers into a single flame retardant cable. This cable design is available in both riser rated and plenum rated versions to fulfill fire code requirements. The loose tube cable design provides excellent mechanical and environmental protection for deployment in a variety of applications.

### Product Snapshot

<b>Applications</b>	Flame-rated and crush-resistant loose tube cable designs provide unsurpassed performance for applications requiring premium mechanical protection to cross floors in multi-level buildings or for placement in air handling spaces.
<b>Constructions</b>	Standard LT cable designs with jacketed interlock armor
<b>Flame Ratings</b>	Riser (OFRC / FT4); Plenum (OFCP / FT6)
<b>Fiber Count</b>	2 to 288 (Riser) / 2 to 144 (Plenum)
<b>Fiber Types</b>	Single-Mode (ESMF, BendBright®, BendBright-XS®) Multimode (62.5/125-OM1, 50/125-OM2+, OM3 & OM4)
<b>Standards</b>	ANSI/ICEA S-83-596, UL-1666, NFPA-262, CSA C22.2 No 230, Telcordia GR-409, RoHS Compliant

### Features and Benefits

- ezINTERLOCK eliminates the need for conduit and supports one-step installation
- 7x improvement in crush resistance over unarmored products
- Gel-free buffer tubes simplifies access and reduces prep time
- Industry standard color coding for quick, error-free fiber identification
- Flexible kink-resistant buffer tubes for routing and storage
- Available with bend-insensitive single-mode and multimode optical fibers
- Flexible, flame-retardant & color coded outer jacket
- Supports all high performance networks including OM4/10 gigabit ethernet systems

**RoHS**  
Compliant

## ezINTERLOCK™ | Indoor-Outdoor Loose Tube Cables

Riser and plenum rated cables

### Gel-Filled Buffer Tubes

ezINTERLOCK Indoor-Outdoor Riser | DRLTBAJ Series | OFCR/FT4

Fiber Count	# Buffer Tubes Outer/Inner Layer	Fibers Per Unit	Diameter Inches (mm)	Cable Weight lb/kft (kg/km)	Bend Radius Load Inches (cm)	Bend Radius No Load Inches (cm)
2 to 60	5	12	0.73 (18.4)	204 (303)	14.6 (36.9)	7.3 (18.5)
62 to 72	6	12	0.76 (19.2)	219 (326)	15.2 (38.4)	7.6 (19.2)
74 to 84	7	12	0.80 (20.4)	248 (369)	16.1 (40.8)	8.1 (20.4)
86 to 96	8	12	0.83 (21.2)	269 (401)	16.7 (42.4)	8.4 (21.2)
98 to 108	9	12	0.88 (22.3)	331 (493)	17.6 (44.6)	8.8 (22.3)
110 to 120	10	12	0.90 (22.8)	349 (519)	18.0 (45.8)	9.0 (22.9)
122 to 132	11	12	0.94 (23.7)	378 (562)	18.7 (47.5)	9.4 (23.8)
134 to 144	12	12	0.97 (24.7)	410 (610)	19.5 (49.5)	9.8 (24.8)

### Gel-Free Buffer Tubes

ezINTERLOCK Indoor-Outdoor Riser | DRLDBAJ Series | OFCR/FT4

Fiber Count	# Buffer Tubes Outer/Inner Layer	Fibers Per Unit	Diameter Inches (mm)	Cable Weight lb/kft (kg/km)	Bend Radius Load Inches (cm)	Bend Radius No Load Inches (cm)
2 to 60	5	12	0.73 (18.4)	200 (297)	14.6 (36.9)	7.3 (18.5)
62 to 72	6	12	0.76 (19.2)	214 (319)	15.2 (38.4)	7.6 (19.2)
74 to 84	7	12	0.80 (20.4)	242 (360)	16.1 (40.8)	8.1 (20.4)
86 to 96	8	12	0.83 (21.2)	263 (391)	16.7 (42.4)	8.4 (21.2)
98 to 108	9	12	0.88 (22.3)	323 (481)	17.6 (44.6)	8.8 (22.3)
110 to 120	10	12	0.90 (22.8)	341 (507)	18.0 (45.8)	9.0 (22.9)
122 to 132	11	12	0.94 (23.7)	368 (547)	18.7 (47.5)	9.4 (23.8)
134 to 144	12	12	0.97 (24.7)	399 (594)	19.5 (49.5)	9.8 (24.8)
146 to 216	12 / 6	12	1.00 (25.4)	405 (602)	20.1 (50.9)	10.1 (25.5)
218 to 264	14 / 8	12	1.06 (27.0)	455 (677)	21.3 (54.1)	10.7 (27.1)
266 to 288	15 / 9	12	1.11 (28.1)	492 (732)	22.2 (56.3)	11.1 (28.2)

ezINTERLOCK Indoor-Outdoor Plenum (Single Jacket -Loose Tube Gel-Free) | DPLDBAJ Series | OFCP/FT6

Fiber Count	# Buffer Tubes Outer/Inner Layer	Fibers Per Unit	Diameter Inches (mm)	Cable Weight lb/kft (kg/km)	Bend Radius Load Inches (cm)	Bend Radius No Load Inches (cm)
2 to 60	5	12	0.65 (16.4)	147 (219)	12.9 (32.8)	6.5 (16.4)
62 to 72	6	12	0.68 (17.3)	166 (247)	13.6 (34.6)	6.8 (17.3)
74 to 84	7	12	0.72 (18.2)	188 (279)	14.4 (36.4)	7.2 (18.2)
86 to 96	8	12	0.76 (19.3)	214 (319)	15.2 (38.6)	7.6 (19.3)
98 to 144	12/6	12	0.89 (22.7)	320 (476)	17.9 (45.4)	8.9 (22.7)

Note. Cable damage may occur if installation temperature limits are exceeded; therefore, Prysmian Group recommends storing I/O cables in appropriate temperature conditions  $\geq 24$  hours prior to placement.

#### Outer Jacket Colors

Orange: Multimode OM1 and OM2+  
 Aqua: Multimode OM3 and OM4  
 Yellow: Single-mode  
 Black: Hybrid

#### Riser & Plenum Mechanical Specifications

Maximum installation load: 600 lbf (2670 N)  
 Maximum operation load: 180 lbf (801 N)

#### Temperature Range

Shipping and Storage: (Riser) -58° F to +158° F (-50° C to +70° C)  
 (Plenum) -40° F to +158° F (-40° C to +70° C)  
 Installation: (Riser) +14° F to +140° F (-10° C to +60° C)  
 (Plenum) +32° F to +140° F (0° C to +60° C)  
 Operation: (Riser) -58° F to +158° F (-50° C to +70° C)  
 (Plenum) -40° F to +158° F (-40° C to +70° C)

#### Prysmian Group

700 Industrial Drive | Lexington, SC 29072

+1-800-879-9862 | +1-800-669-0808 | website: [na.prysmiangroup.com/telecom](http://na.prysmiangroup.com/telecom)

## Ordering Guide

The Prysmian Group part number incorporates several significant attributes involving cable design and optical performance. The appropriate part number can be configured using the process described below.

**EXAMPLE:** ezINTERLOCK loose tube | indoor-outdoor riser with gel-filled buffer tubes | standard single jacket cable with aluminum interlock armor and jacket over armor | 12 62.5/125 multimode fibers per buffer tube | 48 fiber total (printed in feet)

<b>1</b> LENGTH MARKINGS	<b>2</b> PRODUCT FAMILY	<b>3</b> CONSTRUCTION	<b>4</b> FIBER GROUPING	<b>5</b> FIBER TYPE	<b>6</b> FIBER COUNT	<b>7</b> FIBER GRADE
F	DRLTB	AJ	12	G6	048	M2

### PART NUMBER CONSTRUCTION

<b>1</b> LENGTH MARKINGS
F = Feet or M = Meters
<b>2</b> PRODUCT FAMILY
ezINTERLOCK Gel-Tube   Riser   OFCR/FT4 (2 to 144 fibers)
DRLTBAJ = ezINTERLOCK I/O Riser with Aluminum Interlock Armor
ezINTERLOCK Gel-Free Tube   Riser   OFCR/FT4 (2 to 288 fibers)
DRLDDBAJ = ezINTERLOCK I/O Riser with Aluminum Interlock Armor
ezINTERLOCK Gel-Free Tube   Plenum   OFCP/FT6 (2 to 144 fibers)
DPLDBAJ = ezINTERLOCK I/O Plenum with Aluminum Interlock Armor
<b>3</b> CONSTRUCTION
AJ = Jacketed Aluminum
SJ = Jacketed Steel
<b>4</b> FIBER GROUPING
12 = 12f per unit or tube

### FIBER INFORMATION

<b>5</b> FIBER TYPE				
<b>SINGLE-MODE</b>				
HB = Single-Mode (ITU G.652 C & D) Low Water Peak				
ES = Enhanced Single-Mode (ITU G.652 C & D)				
CE = Corning™ SMF28e+ Single-Mode				
BB = BendBright™ Single-Mode (ITU G.657.A1 & G.652.D)				
BX = BendBrightXS™ Single-Mode (ITU G.657.A2 & .B2, & G.652.D)				
<b>MULTIMODE</b>				
	Wavelength (nm)	Bandwidth (MHz)	1 GbE Dist (m)	10 GbE Dist (m)
G6 = OM1 (62.5µm)	850/1300	200/500	300/550	33/___
G5 = OM2+ BIF (50µm)	850/1300	700/500	800	150/___
G3 = OM3 BIF (50µm)	850/1300	1500/500	1000	300/___
G4 = OM4 BIF (50µm)	850/1300	3500/500	1100	550/___
<b>6</b> FIBER COUNT				
002 to 288 fibers				
<b>7</b> FIBER GRADE				
<b>SINGLE-MODE</b>				
Attenuation (dB/km)	Wavelength (nm)	Fiber Type		
E1 = 0.40/0.40/0.30	1310/1383/1550	HB, ES, or CE		
E3 = 0.35/0.35/0.25	1310/1383/1550	HB, ES, CE, B1, BB, CU, or BX		
<b>MULTIMODE</b>				
Attenuation (dB/km)	Wavelength (nm)	Fiber Type		
M2 = 850/1300	3.5/1.0	OM1 (62.5µm)		
M3 = 850/1300	3.0/1.0	50µm		
Other cable constructions and fiber performance grades available on request.				

© DRAKA & PRYSMIAN - Brands of The Prysmian Group. 2014 All Right Reserved. The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed correct at the time of issue. Prysmian Group reserves the right to amend any specifications without notice. These specifications are not contractually valid unless specifically authorized by Prysmian Group. Issued May 2014.