



**Primary Voltage  
Secondary Voltage**

**380/347  
120 x 240**



**50/60 Hertz**

**Series-E**

VA Rating	CE VA Rating	Catalog Number	Output Amps	Overall Dimensions			Mounting Centers		Mounting Slot	Approx. Ship Weight Lbs.
				A	B	C	D	E		
50	50	DCE50LH	0,42/0,21	2,70	5,90	3,33	1,66	3,69	0,22 x 0,44	2,5
100	100	DCE100LH	0,83/0,42	3,09	6,30	3,60	2,05	3,50	0,22 x 0,44	4,3
150	150	DCE150LH	1,25/0,63	3,09	6,90	3,60	2,05	4,10	0,22 x 0,44	5,3
250	160	DCE250LH	2,08/1,04	3,90	6,60	4,30	2,52	3,90	0,22 x 0,44	7,9
350	250	DCE350LH	2,92/1,46	3,90	7,20	4,30	2,52	4,90	0,22 x 0,44	9,6
500	300	DCE500LH	4,17/2,08	4,60	7,20	4,60	3,30	4,50	0,31 x 0,81	13,6
750	500	DCE750LH	6,25/3,13	5,60	7,20	5,10	4,00	4,50	0,31 x 0,81	19
1000	650	DCE1000LH	8,33/4,17	5,60	8,00	5,10	4,00	5,30	0,31 x 0,81	23,5
1500	1000	DCE1500LH	12,5/6,25	6,60	8,50	6,00	5,10	5,10	0,31 x 0,81	31,6

Primary and Secondary voltage links/jumpers supplied standard with all transformers.  
Special voltages and VA sizes available upon request.  
1 Note: For 750 through 1500 VA units actual overall depth is 0.24" plus the value in column B.  
\* See back cover for dimensional drawings.  
All dimensions in inches

**Primary Voltage  
Secondary Voltage**

**380/347  
12 x 24**



**50/60 Hertz**

**Series-F**

VA Rating	CE VA Rating	Catalog Number	Output Amps	Overall Dimensions			Mounting Centers		Mounting Slot	Approx. Ship Weight Lbs.
				A	B	C	D	E		
50	50	DCE50LC	4,17/2,08	2,70	5,90	3,33	1,66	3,69	0,22 x 0,44	2,5
100	100	DCE100LC	8,33/4,17	3,09	6,30	3,60	2,05	3,50	0,22 x 0,44	4,2
150	150	DCE150LC	12,5/6,25	3,09	6,90	3,60	2,05	4,10	0,22 x 0,44	5,3
250	160	DCE250LC	20,8/10,4	3,90	6,60	4,30	2,52	3,90	0,22 x 0,44	7,6
350	250	DCE350LC	29,2/14,6	3,90	7,20	4,30	2,52	4,90	0,22 x 0,44	9,3
500	300	DCE500LC	41,7/20,8	4,60	7,20	4,60	3,30	4,50	0,31 x 0,81	13,2

Primary and Secondary voltage links/jumpers supplied standard with all transformers.  
Special voltages and VA sizes available upon request.  
\* See back cover for dimensional drawings.  
All dimensions in inches

**Primary Voltage  
Secondary Voltage**

**277  
120**



**50/60 Hertz**

**Series-G**

VA Rating	CE VA Rating	Catalog Number	Output Amps	Overall Dimensions			Mounting Centers		Mounting Slot	Approx. Ship Weight Lbs.
				A	B	C	D	E		
50	50	DCE50IE	0,42	2,70	5,90	3,33	1,66	3,69	0,22 x 0,44	2,4
100	100	DCE100IE	0,83	3,09	6,10	3,60	2,05	3,35	0,22 x 0,44	4,1
150	150	DCE150IE	1,25	3,09	6,90	3,60	2,05	4,10	0,22 x 0,44	5,2
250	160	DCE250IE	2,08	3,90	6,60	4,30	2,52	3,90	0,22 x 0,44	7,6
350	250	DCE350IE	2,92	3,90	7,20	4,30	2,52	4,90	0,22 x 0,44	9,3
500	300	DCE500IE	4,17	4,60	7,20	4,60	3,30	4,50	0,31 x 0,81	13,3
750	500	DCE750IE	6,25	5,60	7,60	5,10	4,00	4,90	0,31 x 0,81	20,1
1000	650	DCE1000IE	8,33	5,60	8,00	5,10	4,00	5,30	0,31 x 0,81	22,6
1500	1000	DCE1500IE	12,50	5,60	9,40	5,10	4,00	6,70	0,31 x 0,81	31,1

Primary and Secondary voltage links/jumpers supplied standard with all transformers.  
Special voltages and VA sizes available upon request.  
1 Note: For 750 through 1500 VA units actual overall depth is 0.24" plus the value in column B.  
\* See back cover for dimensional drawings.  
All dimensions in inches

SYNONYMOUS WITH QUALITY





## Series-H

VA Rating	CE VA Rating	Catalog Number	Output Amps	Overall Dimensions			Mounting Centers		Mounting Slot	Approx. Ship Weight Lbs.
				A	B	C	D	E		
50	50	DCE50HC	4,17/2,08	2,70	5,90	3,33	1,66	3,69	0,22 x 0,44	2,5
100	100	DCE100HC	8,33/4,17	3,09	6,10	3,60	2,05	3,35	0,22 x 0,44	3,9
150	150	DCE150HC	12,5/6,25	3,09	6,90	3,60	2,05	4,10	0,22 x 0,44	5,2
250	160	DCE250HC	20,8/10,4	3,90	6,40	4,30	2,52	3,70	0,22 x 0,44	7,1
350	250	DCE350HC	29,2/14,6	3,90	7,20	4,30	2,52	4,90	0,22 x 0,44	9,4
500	300	DCE500HC	41,7/20,8	4,60	7,20	4,60	3,30	4,50	0,31 x 0,81	13,2

Primary and Secondary voltage links/jumpers supplied standard with all transformers.  
 Special voltages and VA sizes available upon request.  
 \* See back cover for dimensional drawings.  
 All dimensions in inches

## Series-I

VA Rating	CE VA Rating	Catalog Number	Output Amps	Overall Dimensions			Mounting Centers		Mounting Slot	Approx. Ship Weight Lbs.
				A	B	C	D	E		
50	50	DCE50NH	0,42/0,21	2,70	5,90	3,33	1,66	3,69	0,22 x 0,44	2,4
100	100	DCE100NH	0,83/0,42	3,09	6,10	3,60	2,05	3,35	0,22 x 0,44	3,9
150	150	DCE150NH	1,25/0,63	3,09	6,90	3,60	2,05	4,10	0,22 x 0,44	5,2
250	160	DCE250NH	2,08/1,04	3,90	6,60	4,30	2,52	3,90	0,22 x 0,44	7,7
350	250	DCE350NH	2,92/1,46	3,90	7,20	4,30	2,52	4,90	0,22 x 0,44	9,5
500	300	DCE500NH	4,17/2,08	4,60	7,20	4,60	3,30	4,50	0,31 x 0,81	13,3
750	500	DCE750NH	6,25/3,13	5,60	7,20	5,10	4,00	4,50	0,31 x 0,81	18,2
1000	650	DCE1000NH	8,33/4,17	5,60	8,00	5,10	4,00	5,30	0,31 x 0,81	22,5
1500	1000	DCE1500NH	12,5/6,25	6,60	8,50	6,00	5,10	5,10	0,31 x 0,81	30,1

Primary and Secondary voltage links/jumpers supplied standard with all transformers.  
 Special voltages and VA sizes available upon request.  
 1 Note: For 750 through 2000 VA units actual overall depth is 0.24" plus the value in column B.  
 \* See back cover for dimensional drawings.  
 All dimensions in inches

## Series-J

VA Rating	CE VA Rating	Catalog Number	Output Amps	Overall Dimensions			Mounting Centers		Mounting Slot	Approx. Ship Weight Lbs.
				A	B	C	D	E		
50	50	DCE50NC	4,17/2,08	2,70	8,90	3,33	1,66	3,69	0,22 x 0,44	2,4
100	100	DCE100NC	8,33/4,17	3,09	6,10	3,60	2,05	3,35	0,22 x 0,44	4
150	150	DCE150NC	12,5/6,25	3,09	6,90	3,60	2,05	4,10	0,22 x 0,44	5,2
250	160	DCE250NC	20,8/10,4	3,90	6,6	4,30	2,52	3,90	0,22 x 0,44	7,7
350	250	DCE350NC	29,2/14,6	3,90	7,2	4,30	2,52	4,90	0,22 x 0,44	9,5
500	300	DCE500NC	41,7/20,8	4,60	7,2	4,60	3,30	4,50	0,31 x 0,81	13,3

Primary and Secondary voltage links/jumpers supplied standard with all transformers.  
 Special voltages and VA sizes available upon request.  
 \* See back cover for dimensional drawings.  
 All dimensions in inches

## Optional Accessories

### Fuse Holder Kit


This general purpose enclosed transformer optional fuse holder kit is specifically designed to provide circuit protection up to a maximum of 20 amps and up to 250V.

The fuse holder kit is supplied with leads for easy hook-up and is easy to install.


**Fuses are NOT supplied with this kit.** Fuses should be selected in accordance with CSA, UL and local electrical codes.

(Note: Fuseholder is designed to accept 1/4" x 1 1/4" fuses)

Part Number	Applicable Transformer Part Number Suffix's	Applicable Specifications
FSFH1	All	Up to 20 amps and 250V



Fuse Holder Kit  
(Optional)

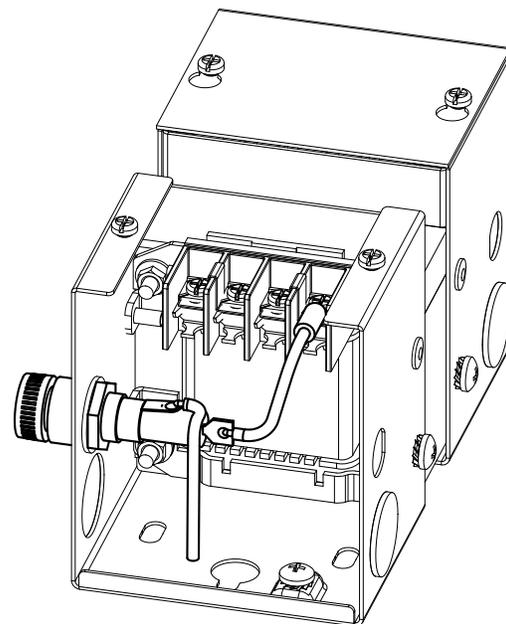

Sample Assembly Drawing  
for Optional Fuse Holder Installation

SYNONYMOUS WITH QUALITY