


CES-AR-CR2-CH-L10-109048 (Order no. 109048)

Safety switch CES-AR-CR2-..., RFID, connection cable, connecting cable PUR

- ▶ Multicode
- ▶ Monitoring output door position OUT
- ▶ PUR connection cable, connecting cable, 10 m, flying lead, 8-core
- ▶ Suitable for low ambient temperatures
- ▶ Door hinge right




Approach direction and installation position



Permissible installation position

Typical operating distance

(Actuator CES-A-BLN... in conjunction with safety switch CES-AP-C.2-... in case of mounting on plastic)



For a side approach direction for the actuator and safety switch, a minimum distance of $s = 6 \text{ mm}$ must be maintained so that the actuating range of the side lobes is not entered.

Attention:

The actuating range may vary depending on the actuator, substrate material and installation situation. Further actuating ranges can be found in the operating instructions.

Multicode evaluation

The system checks whether the actuator type is one that can be recognized by the system (multicode evaluation). The system has a low coding level. Every suitable actuator is recognized by the switch.

Safety characteristics

Thanks to two redundant safety outputs (semiconductor outputs) with internal monitoring, the device is suitable for:

- ▶ Category 4 /PL e according to EN 13849-1
- ▶ SIL 3 according to EN IEC 62061 Table 4

The OSSD outputs used check their function for short circuits and short circuits with test pulses.

LED indicator

STATE Status LED

DIA Diagnostics LED

Terminal assignment

Designation	Function	Connecting cable conductor coloring
IB	Enable input, channel A	WH
UB	Electronics operating voltage, 24 V DC	BN
OA	Safety output, channel A	GN
OB	Safety output, channel B	YE
OUT	Monitoring output	GY
IA	Enable input, channel A	PK
0 V	Weight 0 V DC	BU
RST	Reset input	RD


Scope of delivery

- ▶ 2 x safety screws M4x14

Accessories required

Actuator is not included.

Dimensional drawings

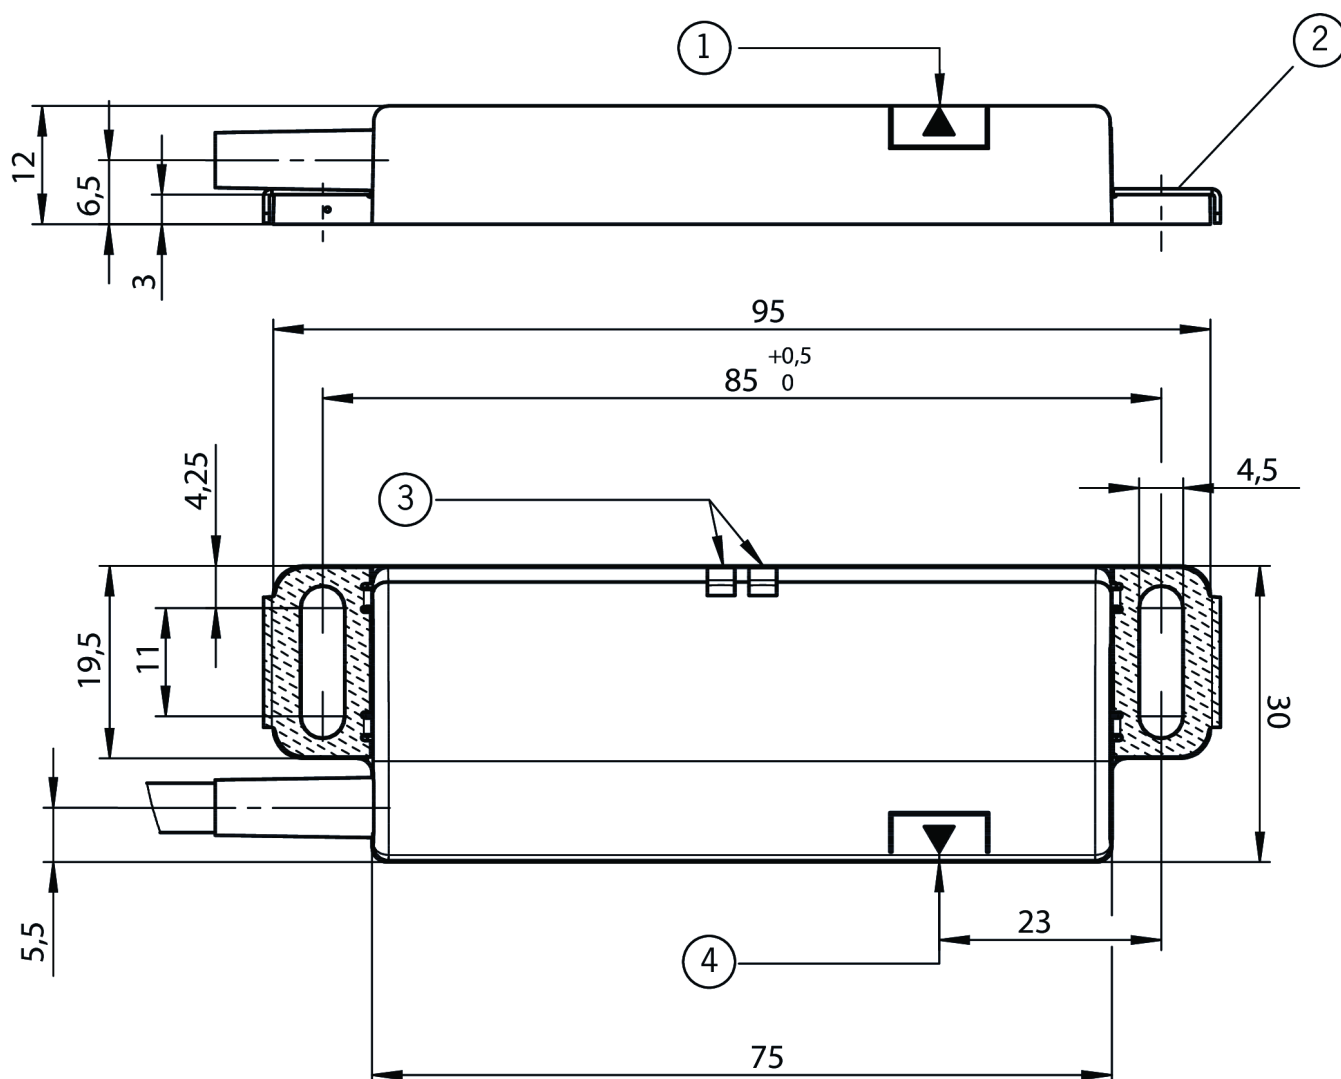

Connection examples

