

TZ2RE024RC18VAB-C2198 (Order no. 100446)

Safety switch TZ, plug connector RC18 and RC12, 3 illuminated pushbuttons

- ▶ Auxiliary release on the front
- ▶ 3 pushbuttons with LED (blue/white/yellow)
- ▶ Plug connector for switch connection
- ▶ Plug connector for enabling switch
- ▶ Actuating head fitted right



Solenoid operating voltage and LED function display

- ▶ 24 V AC/DC -15%, +10%

Guard locking type

TZ2 Open-circuit current principle, guard locking by applying voltage to the solenoid. Release by spring force.


Switching elements

- SK For monitoring the door/actuator position
- ÜK For monitoring the guard locking (built-in solenoid)
- 2131H Slow-action switching contact 3 NC \rightarrow + 1 NO
- 3131H Slow-action switching contact 2 NC \rightarrow + 2 NO


Auxiliary release

This is used for releasing the guard locking with the aid of a tool. Sealing can be fitted to protect against tampering. Lead seal kit and tool included (already pre-assembled on versions with plug connectors).

Functional drawings

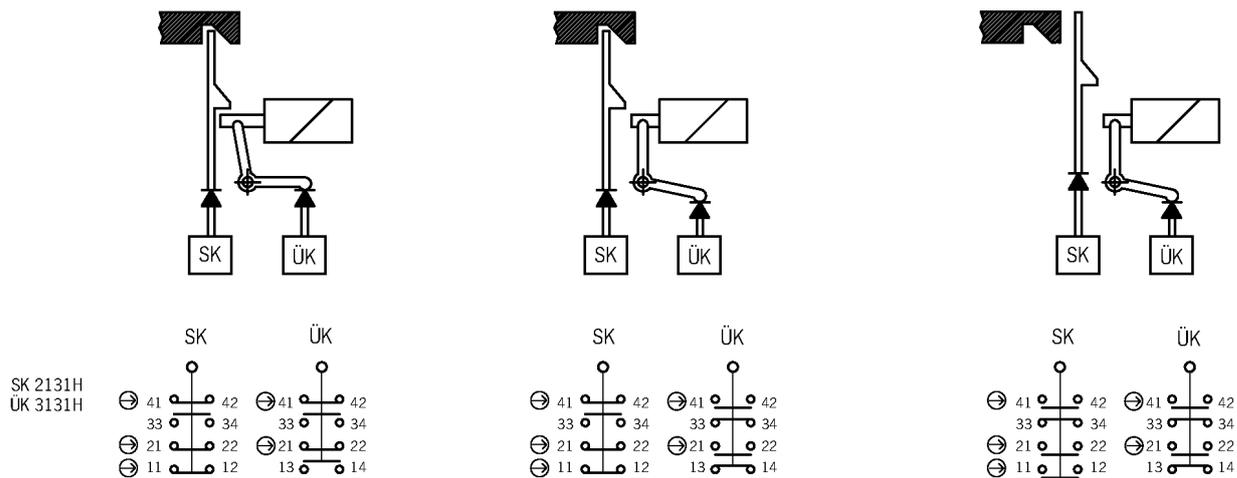


Dimensional drawings

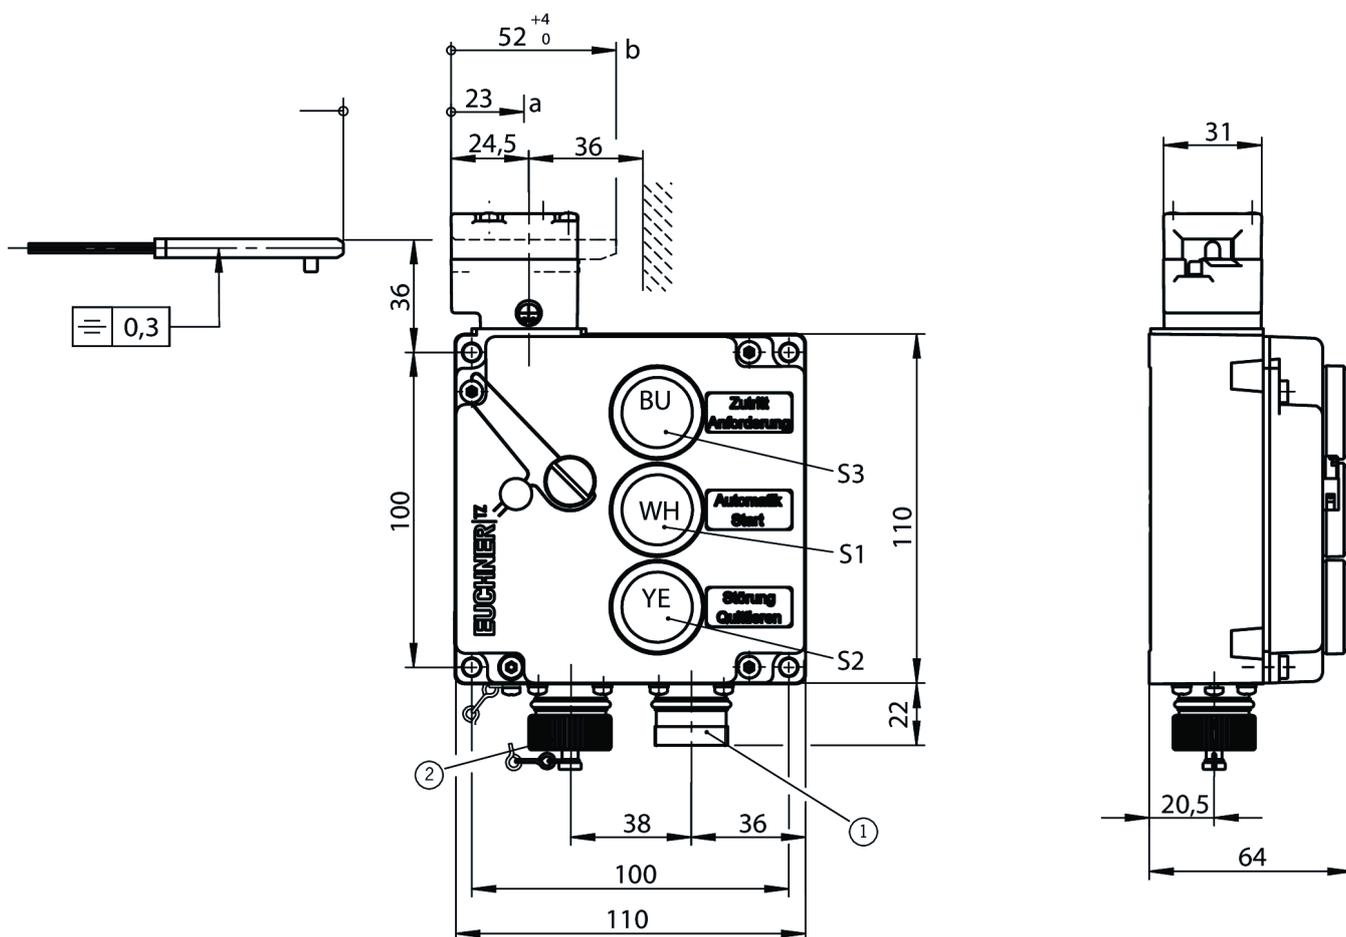

1 Plug connector RC18

2 Connection for enabling switch

Connection examples

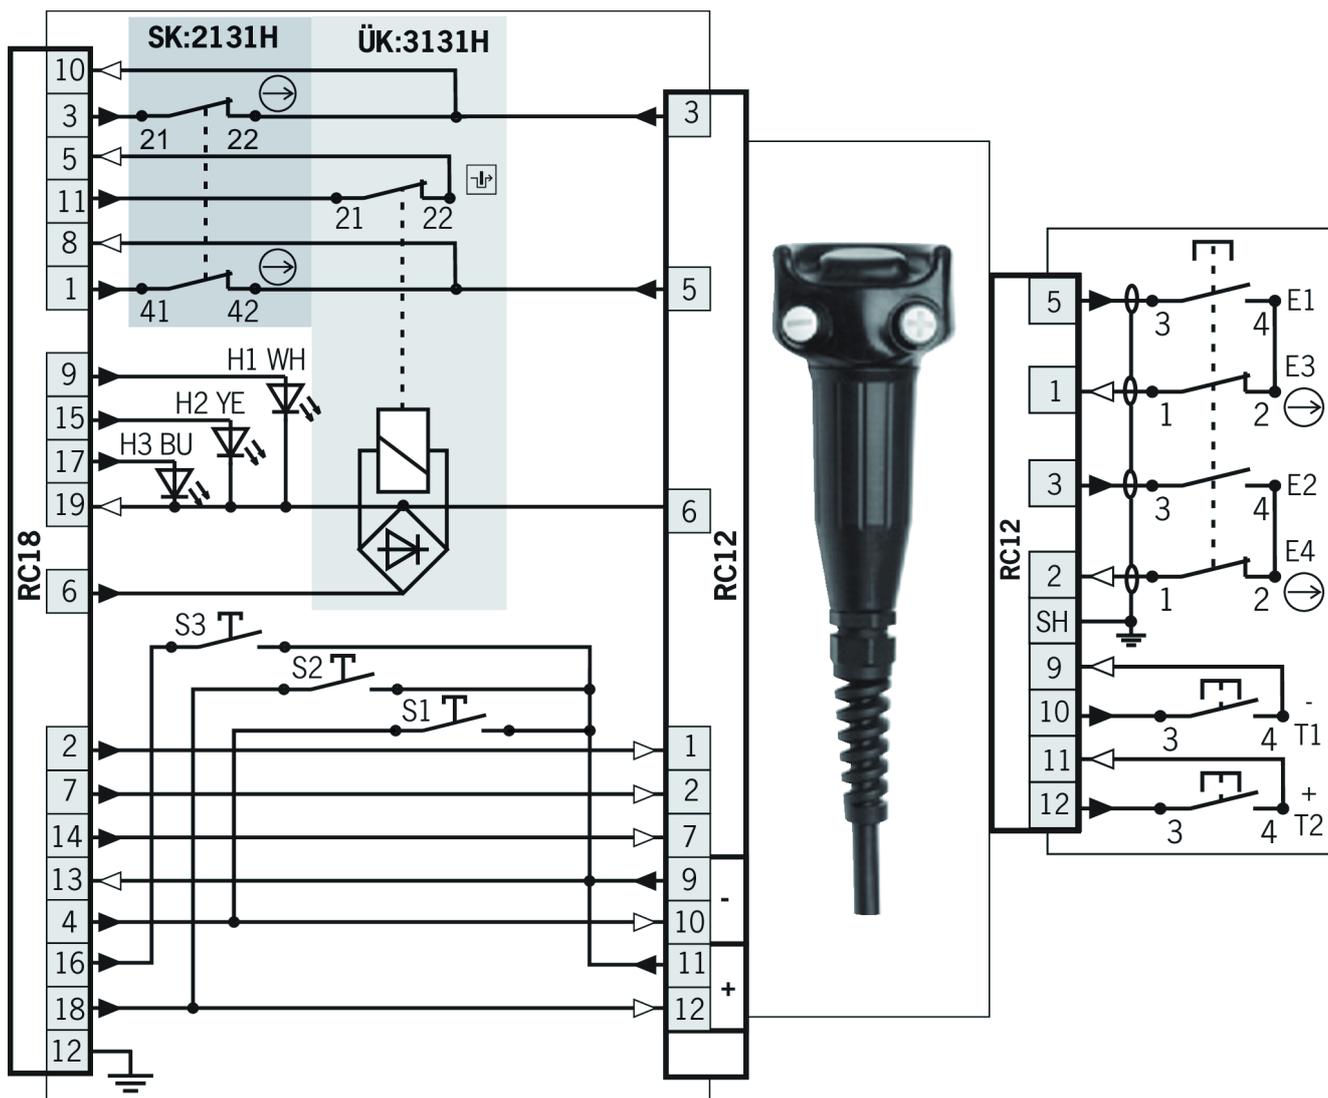

Enabling switch ZSB077040 (077 040) with plug RC12

square_grey_dark.eps Door monitoring

square_grey_light.eps Solenoid monitoring