


3M™ Cold Shrink QT-III Termination Kit 7600-T-3-RJS Series for 5-35 kV

3M™ Cold Shrink QT-III Termination Kit 7600-T-3-RJS Series are designed for cabinet-mount installations and can be used on cables with, or without, internal ground wires. Each termination kit has all of the materials required to make one 3-conductor termination. Lugs must be ordered separately.

*For Wire or UniShield® shielding, please contact 3M for technical assistance.

Number of Conductors	Three Conductor
Shielding Type	Tape Shield (Armored or Unarmored), Wire Shield*, UniShield®*
Indoor/Outdoor	Indoor
Breakout Boot	No
Insulation Rejacketing	Yes
No. Skirts	0
Voltage	3.3 kV, 5 kV, 6.6 kV, 8 kV, 10 kV, 15 kV, 20 kV, 25/28 kV, 35 kV
Packaging	1 kit per case (one three-phase termination per kit)

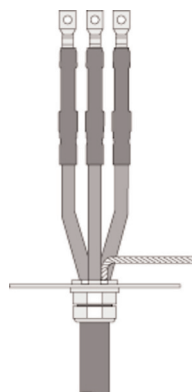

	7620-T-95-3-RJS	7621-T-95-3-RJS	7623-T-95-3-RJS	7624-T-95-3-RJS
UPC	054007-04810	054007-04586	054007-04707	054007-04708
BIL	95 kV	95 kV	95 kV	95 kV
Max. Installed Length	8.5" (216 mm)	8.5" (216 mm)	8.5" (216 mm)	8.5" (216 mm)
Insulation O.D. Range	0.33"-0.50" (8,4-12,7 mm)	0.50"-0.70" (12,7-17,8 mm)	0.70"-0.92" (17,8-23,4 mm)	0.92"-1.18" (23,4-30,0 mm)
Conductor Size 3.3 kV 100% - IEC (JIS)	16-35 mm ² (8-22 mm ²)	50-95 mm ² (38-60 mm ²)	120-185 mm ² (100-150 mm ²)	240-300 mm ² (200-250 mm ²)
Conductor Size 5.0 kV 100% - AEIC	8-2 AWG	1-3/0 AWG	4/0 AWG-400 kcmil	500-750 kcmil
Conductor Size 6.6 kV 100% - IEC (JIS)	16-25 mm ² (-)	35-70 mm ² (-)	95-150 mm ² (-)	185-300 mm ² (-)
Conductor Size 8 kV 100% - AEIC	6-4 AWG	2-2/0 AWG	3/0 AWG-350 kcmil	400-600 kcmil
Conductor Size 10 kV 100% - IEC	-	10-50 mm ²	70-150 mm ²	185-300 mm ²
Conductor Size 15 kV 100% - IEC (AEIC)	- (-)	16-25 mm ² (-)	35-95 mm ² (-)	120-185 mm ² (-)
Conductor Size 20 kV 100% - IEC	-	-	-	-
Conductor Size 25/28 kV 100% - AEIC	-	-	-	-
Conductor Size 35 kV 100% - AEIC	-	-	-	-
	7621-T-110-3-RJS	7622-T-110-3-RJS	7624-T-110-3-RJS	7625-T-110-3-RJS
UPC	054007-04710	054007-04711	054007-04712	054007-04713
BIL	110 kV	110 kV	110 kV	110 kV
Max. Installed Length	12.0" (305 mm)	12.0" (305 mm)	12.0" (305 mm)	12.0" (305 mm)
Insulation O.D. Range	0.50"-0.70" (12,7-17,8 mm)	0.70"-0.92" (17,8-23,4 mm)	0.92"-1.18" (23,4-30,0 mm)	1.18"-1.52" (30,0-38,6 mm)
Conductor Size 3.3 kV 100% - IEC (JIS)	50-95 mm ² (38-60 mm ²)	120-185 mm ² (100-150 mm ²)	240-300 mm ² (200-250 mm ²)	- (300-325 mm ²)
Conductor Size 5.0 kV 100% - AEIC	1-3/0 AWG	4/0 AWG-400 kcmil	500-750 kcmil	800-1000 kcmil
Conductor Size 6.6 kV 100% - IEC (JIS)	35-70 mm ² (14-38 mm ²)	95-150 mm ² (60-100 mm ²)	185-300 mm ² (150-250 mm ²)	- (300-325 mm ²)
Conductor Size 8 kV 100% - AEIC	2-2/0 AWG	3/0 AWG-350 kcmil	400-600 kcmil	750-1000 kcmil
Conductor Size 10 kV 100% - IEC	10-50 mm ²	70-150 mm ²	185-300 mm ²	-
Conductor Size 15 kV 100% - IEC (AEIC)	16-25 mm ² (2-1 AWG)	35-95 mm ² (1/0-4/0 AWG)	120-185 mm ² (250-450 kcmil)	200-325 mm ² (500-750 kcmil)
Conductor Size 20 kV 100% - IEC	-	-	-	-
Conductor Size 25/28 kV 100% - AEIC	-	-	-	-
Conductor Size 35 kV 100% - AEIC	-	-	-	-