


## Aircore Cables HDPE/LLDPE

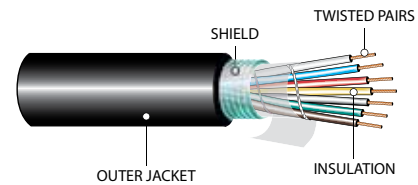

### SPECIFICATIONS

- PE-22

### CONSTRUCTION

- Conductor:** Solid annealed copper
- Insulation:** Solid high density Polyethylene (HDPE)
- Twisted Pairs:** Color coded telephone twisted pairs
- Shield:** Corrugated-Copolymer coated tape
- Outer Jacket:** Linear low density Polyethylene (LLDPE), Black
- Options:** Other sizes, colours and custom designs available upon request

Part Number	AWG Size		Approximate Diameter		Cable Weight	
	Pairs	Cond.	in.	mm	LB/MFT	KG/KM
13102-02-010	6	24	0.370	9.398	55	82
13102-04-010	12	24	0.430	10.922	80	119
13102-07-010	25	24	0.540	13.716	135	201
13102-09-010	50	24	0.670	17.018	225	335
13102-11-010	100	24	0.880	22.352	400	595
13102-13-010	200	24	1.200	30.480	745	1109
13103-02-010	6	22	0.400	10.160	70	104
13103-04-010	12	22	0.490	12.446	110	164
13103-07-010	25	22	0.630	16.002	190	283
13103-09-010	50	22	0.900	22.860	325	484
13103-10-010	100	22	1.100	27.940	595	885
13104-02-010	6	19	0.490	12.446	110	164
13104-04-010	12	19	0.620	15.748	180	268
13104-07-010	25	19	0.790	20.066	320	476
13104-08-010	50	19	1.100	27.940	590	878

Note: All dimensions are nominal and are subject to normal manufacturing tolerance.  
Specifications are subject to change without prior notice.