

SIS 600V

XLPE

SPECIFICATIONS

- CSA FT1 & FT5
- CSA 22.2 No.127

RoHS

*Refer to CE Code for details



CONSTRUCTION


Conductor: Stranded copper

Insulation: Cross-linked Polyethylene (XLPE)

Conductor Temperature: 90°C

Options: Tinned and bare conductors available upon request

Other coloured outer jackets available upon request

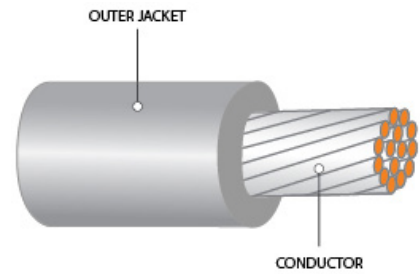

Part Number	No. of Cond.	AWG Size		Insulation Thickness		Approximate Diameter		Net Weight	
		Cond.	Stranding	in.	mm	in.	mm.	LB/ MFT	KG/KM
17004-02-090	1	16	26	0.031	0.787	0.125	3.175	12	18
17004-03-050	1	14	41	0.030	0.760	0.136	3.450	19	29
17004-04-010	1	12	65	0.030	0.760	0.158	4.010	28	42
17004-05-010	1	10	104	0.030	0.760	0.183	4.650	42	63

Note: All dimensions are nominal and are subject to normal manufacturing tolerance.
Specifications are subject to change without prior notice.

* Refer to CEC for Ampacity.