


General Purpose Paired Overall Foiled Shielded Plenum



SPECIFICATIONS

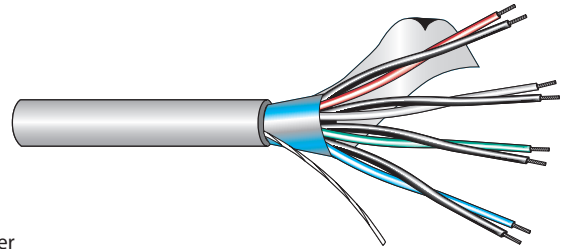

APPLICATIONS

- Audio
- Control
- Instrumentation

CONSTRUCTION

Conductor: Stranded tinned copper
 Insulation: PVC
 Overall Shield: Overall aluminum foil shield with stranded tinned copper drain wire
 Outer Jacket: PVC, grey
 Temperature: 60°C
 Options: Stranded bare copper conductors
 Other coloured outer jacket and constructions available upon request

Part Number	Pair			Drain Wire (AWG)	Approx. Insulation Thickness (in.)	Approx. Jacket Thickness (in.)	Approx. Diameter (in.)	Volt	Approx Weight (LB/MFT)	Colour Code Chart
	No.	AWG Size	Stranding							
52-646-2402	2	24	7/32	24	0.008	0.015	0.173	300	14	3
52-646-2202	2	22	7/30	24	0.008	0.015	0.193	300	20	3
52-646-2203	3	22	7/30	24	0.008	0.015	0.205	300	26	3
52-646-2206	6	22	7/30	24	0.008	0.015	0.261	300	46	3

General Purpose Paired Individual Foiled Shielded Plenum



SPECIFICATIONS



APPLICATIONS

- Audio
- Control
- Instrumentation

CONSTRUCTION

Conductor: Stranded tinned copper
 Insulation: PVC
 Individual Shield: Aluminum foil shield with stranded tinned copper drain wire over each pair
 Outer Jacket: PVC, grey
 Temperature: 60°C
 Options: Stranded bare copper conductors
 Other coloured outer jacket and constructions available upon request

Part Number	Pair			Drain Wire (AWG)	Approx. Insulation Thickness (in.)	Approx. Jacket Thickness (in.)	Approx. Diameter (in.)	Volt	Approx Weight (LB/MFT)	Colour Code Chart
	No.	AWG Size	Stranding							
52-606-2202	2	22	7/30	24	0.008	0.015	0.156	300	21	3
52-606-2203	3	22	7/30	24	0.008	0.015	0.213	300	30	3

Note: All dimensions are nominal and are subject to normal manufacturing tolerance. Specifications are subject to change without prior notice

*See page 32 for corresponding Colour Code Chart