


General Purpose Multi-Conductor
Overall Foil Shield 80°C



SPECIFICATIONS

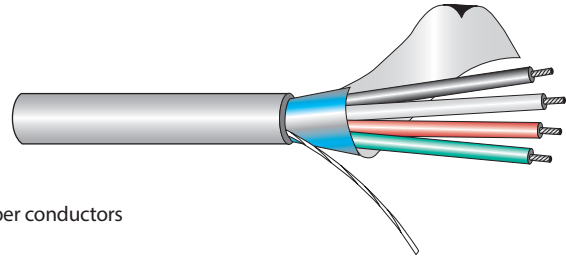

APPLICATIONS

- Audio
- Control
- Instrumentation

CONSTRUCTION

- Conductor: Stranded tinned copper conductors
- Insulation: Polyethylene
- Drain Wire: Stranded tinned copper
- Shield: Overall, 100% aluminum foil shield
- Outer Jacket: PVC, grey
- Temperature: -20°C to 80°C
- Options: Stranded bare copper conductors
Aluminum or steel interlock armour and jacket
Other coloured outer jacket and constructions available upon request

Part Number	Conductor			Approx. Diameter (in.)	Volt	Approx Weight (LB/MFT)	Colour Code Chart
	No.	AWG Size	Stranding				
52-444-2202	2	22	7/30	0.176	600	17	1
52-444-2203	3	22	7/30	0.186	600	22	1
52-444-2204	4	22	7/30	0.206	600	28	1
52-444-2002	2	20	7/28	0.189	600	22	1
52-444-2003	3	20	7/28	0.200	600	28	1
52-444-2004	4	20	7/28	0.216	600	41	1
52-444-1802	2	18	16/30	0.213	600	30	1
52-444-1803	3	18	16/30	0.225	600	39	1
52-444-1804	4	18	16/30	0.246	600	47	1
52-444-1602	2	16	26/30	0.236	600	41	1
52-444-1603	3	16	26/30	0.264	600	51	1
52-444-1604	4	16	26/30	0.265	600	63	1
52-444-1402	2	14	41/30	0.338	600	71	1
52-444-1403	3	14	41/30	0.359	600	91	1
52-444-1404	4	14	41/30	0.394	600	114	1
52-444-1202	2	12	65/30	0.376	600	95	1
52-444-1203	3	12	65/30	0.400	600	126	1
52-444-1204	4	12	65/30	0.440		158	1

Note: All dimensions are nominal and are subject to normal manufacturing tolerance. Specifications are subject to change without prior notice

*See page 32 for corresponding Colour Code Chart