


Low Capacitance Paired

Overall Foil Shielded

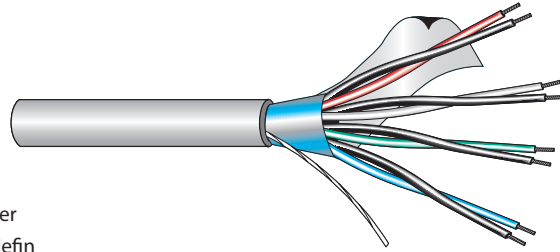

SPECIFICATIONS

SP FT4 UL

APPLICATIONS

- Computer
- Data
- Control

CONSTRUCTION

Conductor: Stranded tinned copper
 Insulation: Polyethylene or polyolefin
 Outer Jacket: PVC, grey
 Overall Shield: Overall aluminum foil shield with stranded tinned copper drain wire
 Temperature: -20°C to 80°C
 Options: Stranded bare copper conductors
 Aluminum or steel interlock armour and jacket
 Other coloured outer jacket and constructions available upon request

Part Number	Pair			Approx. Insulation Thickness (in.)	Approx. Jacket Thickness (in.)	Approx. Diameter (in.)	Volt	Approx Weight (LB/MFT)	Colour Code Chart
	No.	AWG Size	Stranding						
52-743-2401	1	24	7/32	0.013	0.030	0.167	150	15	5
52-743-2402	2	24	7/32	0.013	0.030	0.226	150	25	5
52-743-2403	3	24	7/32	0.013	0.030	0.239	150	30	5
52-743-2404	4	24	7/32	0.013	0.030	0.262	150	36	5
52-743-2406	6	24	7/32	0.013	0.030	0.297	150	47	5
52-743-2407	7.5	24	7/32	0.013	0.030	0.303	150	53	5
52-743-2410	10	24	7/32	0.013	0.030	0.369	150	70	5
52-743-2412	12.5	24	7/32	0.013	0.030	0.382	150	80	5

LOW CAPACITANCE