


Low Capacitance Paired Individual Foil and Braid Shielded



SPECIFICATIONS

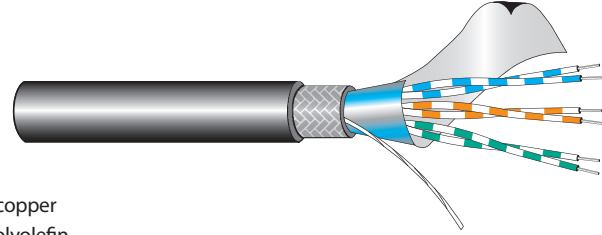

APPLICATIONS

- Computer
- Data

CONSTRUCTION

Conductor: Stranded tinned copper
 Insulation: Polyethylene or polyolefin
 Overall Shield: Overall aluminum foil shield with stranded tinned copper drain wire
 Braid Shield: 65% or 85% Tinned Copper
 Outer Jacket: PVC, grey
 Temperature: -20°C to 80°C
 Options: Stranded bare copper conductors
 Other coloured outer jacket and constructions available upon request

Part Number	Pair			Approx. Diameter (in.)	Volt	Approx Weight (LB/MFT)	Colour Code Chart
	No.	AWG Size	Stranding				
52-764-2402	2	24	7/32	0.246	300	37	5
52-764-2403	3	24	7/32	0.258	300	42	5
52-764-2404	4	24	7/32	0.279	300	45	5
52-764-2406	6	24	7/32	0.312	300	60	5
52-764-2409	9	24	7/32	0.361	300	78	5
52-764-2410	10	24	7/32	0.374	300	83	5
52-764-2412	12.5	24	7/32	0.392	300	91	5

Note: All dimensions are nominal and are subject to normal manufacturing tolerance.
 Specifications are subject to change without prior notice

*See page 33 for corresponding Colour Code Chart