


## Gopher Resistant Cables

HDPE/LLDPE

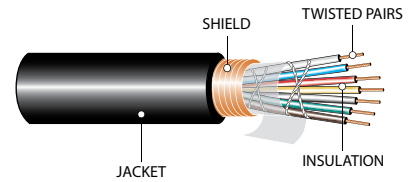

### SPECIFICATIONS

• 7 CFR 1755.390 (REA PE-39)

### CONSTRUCTION

- Conductor:** Solid annealed copper conductor
- Insulation:** Solid high density Polyethylene (HDPE)
- Twisted Pairs:** Color coded telephone twisted pairs
- Shield:** Corrugated-copper bearing tape
- Filling Compound:** ETPR filled compound
- Outer Jacket:** Linear low density Polyethylene (LLDPE), black
- Options:** Other sizes and custom designs available upon request

| Part Number  | AWG Size |       | Approximate Diameter |        | Cable Weight |       |
|--------------|----------|-------|----------------------|--------|--------------|-------|
|              | Pairs    | Cond. | in.                  | mm     | LB/MFT       | KG/KM |
| 13105-07-010 | 25       | 22    | 0.710                | 18.034 | 290          | 432   |
| 13105-09-010 | 50       | 22    | 0.950                | 24.130 | 520          | 774   |
| 13158-04-010 | 12       | 24    | 0.510                | 12.954 | 135          | 201   |
| 13158-07-010 | 25       | 24    | 0.810                | 20.574 | 375          | 558   |

*Note: All dimensions are nominal and are subject to normal manufacturing tolerance.  
Specifications are subject to change without prior notice.*