


Green Ground Cable 1000V

XLPE/PVC

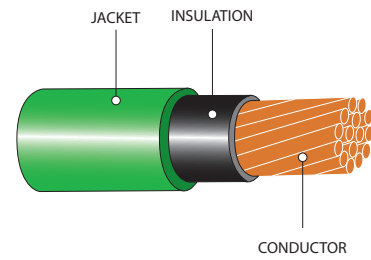

SPECIFICATIONS

- CSA FT4
- CSA C22.2 No. 38 & 230
- T.C. Approved**

*Refer to CE Code for details

**1/0 AWG & larger



CONSTRUCTION

Conductor: Compact or compressed stranded bare copper

Insulation: Flame-retardant (FR) Cross Linked Polyethylene (XLPE) Type RW90

Outer Jacket: -40°C to + 90°C wet, 90°C dry, Polyvinyl Chloride (PVC), green

Options: Other sizes and constructions available upon request

Part Number	AWG Size	Insulation Thickness		Approximate Diameter		Net Weight		Minimum Bend Radius (in)
		in.	mm.	in.	mm.	LB/MFT	KG/KM	
12705-01-053	6 (7)	0.060	1.524	0.371	9.423	127	189	4.500
12706-01-053	4 (7)	0.060	1.524	0.420	10.668	140	209	4.500
12707-01-053	2 (7)	0.060	1.524	0.457	11.608	273	406	5.500
12710-01-053	2/0 (19)	0.080	2.032	0.638	16.205	536	798	7.750
12712-01-053	4/0 (19)	0.080	2.032	0.739	18.771	813	1210	9.000

Note: All dimensions are nominal and are subject to normal manufacturing tolerance.
Specifications are subject to change without prior notice.

Refer to CEC for Ampacity