


Figure 8 Cables

HDPE/LLDPE

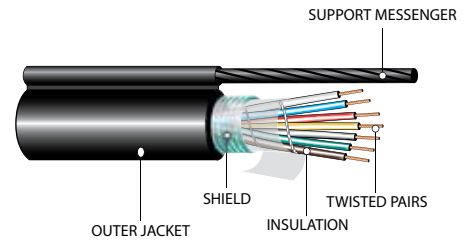

SPECIFICATIONS

- PE-38

CONSTRUCTION

- Conductor:** Solid annealed copper
- Insulation:** Solid high density Polyethylene (HDPE)
- Twisted Pairs:** Color coded telephone twisted pairs
- Shield:** Corrugated-Copolymer coated tape
- Support Messenger:** 1/4 " 7 strand galvanized steel fully flooded
- Outer Jacket:** Linear low density Polyethylene (LLDPE), black
- Options:** Other sizes, colours and custom designs available upon request

Part Number	AWG Size		Approximate Diameter		Net Weight	
	Pairs	Cond.	in.	mm	LB/MFT	KG/KM
13112-01-010	6	24	0.370	9.398	205	305
13115-04-010	12	24	0.430	10.922	230	342
13115-07-010	25	24	0.540	13.716	285	424
13113-02-010	6	22	0.400	10.160	220	327
13113-04-010	12	22	0.490	12.446	260	387
13113-07-010	25	22	0.610	15.494	335	499
13114-02-010	6	19	0.490	12.446	260	387
13114-04-010	12	19	0.620	15.748	330	491
13114-07-010	25	19	0.810	20.574	480	714

Note: All dimensions are nominal and are subject to normal manufacturing tolerance.
Specifications are subject to change without prior notice.