


## Type W 2kV

EPDM/CPE

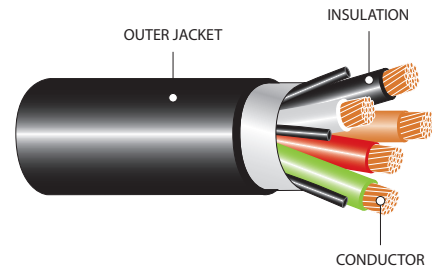

### SPECIFICATIONS

- CSA Approved
- ASTM B-33
- MSHA P-184
- RoHS Compliant

\*Refer to CE Code for details



### CONSTRUCTION

**Conductor:** Fully annealed stranded bare or tin coated copper

**Insulation:** Premium-grade, colour-coded 90°C Ethylene Propylene Diene Monomer (EPDM)

**Outer Jacket:** Flame-retardant, oil & sunlight resistant Chlorinated Polyethylene (CPE) rated temperature 90°C

**Options:** Other sizes, colours and custom designs available upon request  
Ethylene Propylene Rubber (EPR) available upon request

### 5 Conductor

Part Number	No. of Cond.	AWG Size		Insulation Thickness		Approximate Diameter		Net Weight	
		Cond.	Stranding	in.	mm	in.	mm.	LB/ MFT	KG/KM
03009-02-010	5	6	259	0.060	1.520	1.170	29.720	75	112
03009-04-010	5	4	259	0.060	1.520	1.360	34.540	1320	1964
03009-06-010	5	2	259	0.080	2.030	1.595	40.510	1925	2864
03009-07-000	5	1	259	0.080	2.030	1.820	46.230	2675	3980
03009-07-010	5	1/0	259	0.080	2.030	1.900	48.260	2885	4293
03009-08-010	5	2/0	259	0.080	2.030	1.845	46.860	2950	4390
03009-09-010	5	3/0	259	0.080	2.030	2.260	57.400	4900	7291
03009-10-010	5	4/0	259	0.080	2.030	2.460	62.480	5980	8898

Note: All dimensions are nominal and are subject to normal manufacturing tolerance.  
Specifications are subject to change without prior notice.

\* Refer to CEC for Ampacity.