


Type SOOW 12AWG 600V

EPDM/CPE

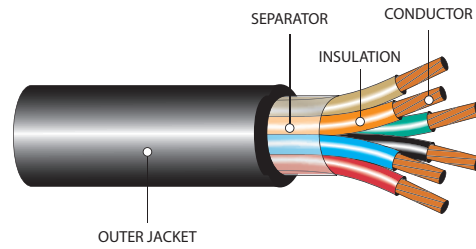

SPECIFICATIONS

- CSA FT2
- CSA C22.2 No. 49
- UL Flexible Cord - UL62
- MSHA Approved
- RoHS Compliant

*Refer to CE Code for details

UL  FT2

CONSTRUCTION

Conductor: Annealed bare copper

Insulation: Colour coded, 90°C flexible Ethylene Propylene Diene Monomer (EPDM)

Outer Jacket: -40°C to +90°C, sunlight and weather resistant Chlorinated Polyethylene (CPE), black

Options: Other coloured outer jacket and constructions available upon request

12 AWG

Part Number	No. of Conductors	AWG Size		Insulation Thickness		Approximate Diameter		Net Weight	
		Cond.	Stranding	in.	mm.	in.	mm.	LB/MFT	KG/KM
01010-11-077	3	12	65/30	0.045	1.140	0.600	15.240	250	372
04004-01-010	5	12	65/30	0.045	1.140	0.715	18.160	333	496
04004-02-010	6	12	65/30	0.045	1.140	0.740	18.800	412	613
04004-03-010	7	12	65/30	0.045	1.140	0.790	20.070	465	692
04004-04-010	8	12	65/30	0.045	1.140	0.825	20.960	526	783
04004-06-010	10	12	65/30	0.045	1.140	1.000	25.400	649	966
04004-08-010	12	12	65/30	0.045	1.140	1.010	25.650	669	996
04004-10-010	14	12	65/30	0.045	1.140	1.020	25.910	731	1088
04004-12-010	16	12	65/30	0.045	1.140	1.135	28.830	933	1388
04004-16-010	20	12	65/30	0.045	1.140	1.175	29.840	989	1472
04004-20-010	24	12	65/30	0.045	1.140	1.360	34.540	1273	1894
04004-26-010	30	12	65/30	0.045	1.140	1.455	36.960	1492	2220

Note: All dimensions are nominal and are subject to normal manufacturing tolerance. Specifications are subject to change without prior notice.

Refer to CEC for Ampacity