


Type SOOW 16AWG 600V

EPDM/CPE

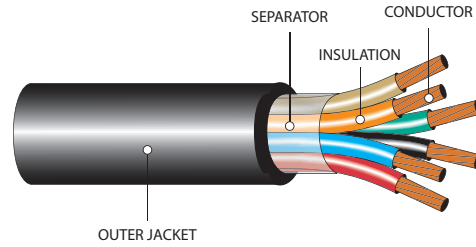

SPECIFICATIONS

- CSA FT2
- CSA C22.2 No. 49
- UL Flexible Cord - UL62
- MSHA Approved
- RoHS Compliant

*Refer to CE Code for details

UL  FT2

CONSTRUCTION

Conductor: Annealed bare copper

Insulation: Colour coded, 90°C flexible Ethylene Propylene Diene Monomer (EPDM)

Outer Jacket: -40°C to +90°C, sunlight and weather resistant Chlorinated Polyethylene (CPE), black

Options: Other coloured outer jacket and constructions available upon request

16 AWG

Part Number	No. of Conductors	AWG Size		Insulation Thickness		Approximate Diameter		Net Weight	
		Cond.	Stranding	in.	mm.	in.	mm.	LB/MFT	KG/KM
01010-05-077	3	16	65/34	0.030	0.760	0.395	10.800	100	149
01010-06-077	4	16	65/34	0.030	0.760	0.370	9.4000	95	141
04002-01-010	5	16	26/30	0.030	0.760	0.495	12.570	167	249
04002-02-010	6	16	26/30	0.030	0.760	0.520	13.210	182	271
04002-03-010	7	16	26/30	0.030	0.760	0.540	13.720	194	289
04002-04-010	8	16	26/30	0.030	0.760	0.575	14.610	218	324
04002-06-010	10	16	26/30	0.030	0.760	0.620	15.750	255	379
04002-08-010	12	16	26/30	0.030	0.760	0.660	16.760	296	441
04002-10-010	14	16	26/30	0.030	0.760	0.730	18.540	352	524
04002-12-010	16	16	26/30	0.030	0.760	0.740	18.800	383	570
04002-16-010	20	16	26/30	0.030	0.760	0.810	20.570	457	680
04002-20-010	24	16	26/30	0.030	0.760	0.925	23.500	563	838
04002-26-010	30	16	26/30	0.030	0.760	1.010	25.650	767	1141

Note: All dimensions are nominal and are subject to normal manufacturing tolerance.
Specifications are subject to change without prior notice.

Refer to CEC for Ampacity