


Thermoplastic Extreme Flexing Festoon Cable 600V Flat

PVC/PVC

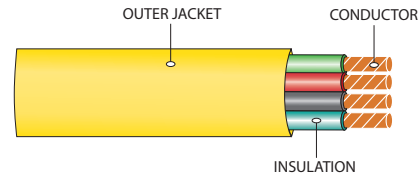

SPECIFICATIONS

- CSA FT1
- OSHA Acceptable

*Refer to CE Code for details



CONSTRUCTION

Conductor: Rope bare copper

Insulation: Colour coded, flame-retardant (FR) Polyvinyl Chloride (PVC)

Ground (Bonding) Conductor: Green conductor for grounding only

Outer Jacket: -40°C to +105°C, sunlight resistant Polyvinyl Chloride (PVC), yellow

Options: Other coloured outer jacket and constructions available upon request
Fitted connectors available upon request

Part Number	No. of Conductors	AWG Size		Insulation Thickness		Approximate Diameter		Net Weight	
		Cond.	Stranding	in.	mm.	in.	mm.	LB/MFT	KG/KM
27010-04-070G	4	12	65/30	0.030	0.760	0.230 x 0.710	5.84 x 18.54	160	238
27010-07-070G	7	12	65/30	0.030	0.760	0.230 x 1.340	5.84 x 34.04	271	403
27010-08-070G	8	12	65/30	0.030	0.760	0.230 x 1.650	5.84 x 41.94	307	457
27015-04-070G	4	10	105/30	0.030	0.760	0.270 x 0.880	6.86 x 22.35	241	359
27020-04-070G	4	8	168/30	0.045	1.14	0.365 x 1.190	9.27 x 30.23	405	603
27025-04-070G	4	6	266/30	0.060	1.52	0.430 x 1.450	10.92 x 36.83	612	911
27030-04-070G	4	4	420/30	0.060	1.52	0.490 x 1.690	12.45 x 42.93	750	1116
27040-04-070G	4	2	665/30	0.060	1.52	0.560 x 1.955	14.23 x 49.66	1273	1894

Note: All dimensions are nominal and are subject to normal manufacturing tolerance.
Specifications are subject to change without prior notice

Refer to CEC for Ampacity