


## Type SOOW 18AWG 600V

EPDM/CPE

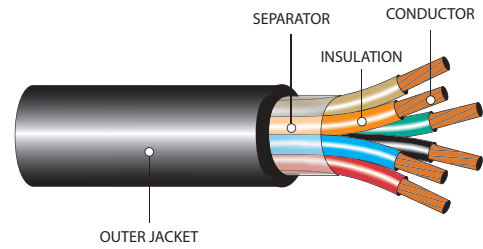

### SPECIFICATIONS

- CSA FT2
- CSA C22.2 No. 49
- UL Flexible Cord - UL62
- MSHA Approved
- RoHS Compliant

\*Refer to CE Code for details

UL  FT2

### CONSTRUCTION

**Conductor:** Annealed bare copper

**Insulation:** Colour coded, 90°C flexible Ethylene Propylene Diene Monomer (EPDM)

**Outer Jacket:** -40°C to +90°C, sunlight and weather resistant Chlorinated Polyethylene (CPE), black

**Options:** Other coloured outer jacket and constructions available upon request

### 18 AWG

Part Number	No. of Conductors	AWG Size		Insulation Thickness		Approximate Diameter		Net Weight	
		Cond.	Stranding	in.	mm.	in.	mm.	LB/MFT	KG/KM
04001-01-010	5	18	16/30	0.030	0.760	0.465	11.810	141	210
04001-02-010	6	18	16/30	0.030	0.760	0.495	12.570	152	226
04001-03-010	7	18	16/30	0.030	0.760	0.520	13.210	172	256
04001-04-010	8	18	16/30	0.030	0.760	0.530	13.460	177	263
04001-06-010	10	18	16/30	0.030	0.760	0.595	15.110	225	335
04001-08-010	12	18	16/30	0.030	0.760	0.600	15.240	240	357
04001-10-010	14	18	16/30	0.030	0.760	0.630	16.000	265	394
04001-12-010	16	18	16/30	0.030	0.760	0.700	17.780	310	461
04001-16-010	20	18	16/30	0.030	0.760	0.795	20.190	382	568
04001-20-010	24	18	16/30	0.030	0.760	0.850	21.590	451	671
04001-26-010	30	18	16/30	0.030	0.760	0.915	23.240	533	793

Note: All dimensions are nominal and are subject to normal manufacturing tolerance. Specifications are subject to change without prior notice.

Refer to CEC for Ampacity