


Welding Cable Class K 600V

EPDM

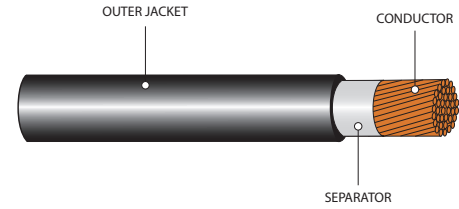

SPECIFICATIONS

- RoHS Compliant

CONSTRUCTION

Conductor: Stranded bare annealed copper - class K

Outer Jacket: -40°C to +90°C, premium-grade Ethylene Propylene Diene Monomer (EPDM), black

Voltage: 600V intermittent

Option: Other coloured outer jacket and constructions available upon request

30 AWG

Part Number	AWG Size		Approximate Diameter		Net Weight	
	Cond.	Stranding	in.	mm.	LB/MFT	KG/KM
08005-02-010	6	259/30	0.380	9.65	135	201
08005-03-010	4	374/30	0.400	10.16	172	256
08005-05-010	2	625/30	0.465	11.81	260	387
08005-06-010	1	778/30	0.495	12.57	317	472
08005-07-010	1/0	990/30	0.560	14.22	400	595
08005-08-010	2/0	1248/30	0.615	15.62	487	725
08005-09-010	3/0	1586/30	0.670	17.02	605	900
08005-10-010	4/0	2054/30	0.750	19.05	827	1231
08050-11-010	250	2496/30	0.830	21.08	976	1452
08005-12-010	350	3432/30	0.960	24.38	1338	1991
08005-13-010	500	5054/30	1.200	30.48	1995	2969

Note: All dimensions are nominal and are subject to normal manufacturing tolerance.
Specifications are subject to change without prior notice

Refer to CEC for Ampacity