


## Fire Alarm Cable Shielded, Non-Armoured PVC, FT4



### SPECIFICATIONS

- CSA FT4
  - FAS 105
- \*Refer to CE Code for details

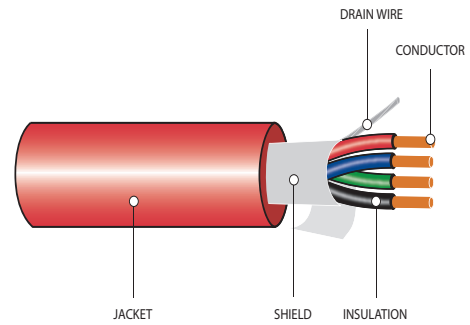

### CONSTRUCTION

- Conductor:** Solid Bare Copper
- Insulation:** Polyvinyl Chloride (PVC)
- Shield:** 100% Aluminum Foil Shield
- Outer Jacket Material:** Polyvinyl Chloride (PVC)
- Cable Temperature:** -20 °C TO 105°C
- Voltage:** 300V
- Options:** Other jacket colours and sizes. Armour is available upon request.

Part Number	AWG Size	No. of Conductors	Stranding	Insulation Thickness (in.)	Approximate Diameter (in.)	Net Weight	
						LB/MFT	KG/KM
26323-08-030	18	8	Solid	0.015	0.310	77	115
26323-05-030	18	5	Solid	0.015	0.255	56	83
26323-04-030	18	4	Solid	0.015	0.240	47	69
26323-03-030	18	3	Solid	0.015	0.226	40	59
26323-02-030	18	2	Solid	0.015	0.211	30	45
26324-05-030	16	5	Solid	0.015	0.282	90	134
26324-04-030	16	4	Solid	0.015	0.265	70	104
26324-03-030	16	3	Solid	0.015	0.247	61	90
26324-02-030	16	2	Solid	0.015	0.232	39	58
26325-04-030	14	4	Solid	0.015	0.308	75	112
26325-02-030	14	2	Solid	0.015	0.262	53	79

Note: All dimensions are nominal and are subject to normal manufacturing tolerance. Specifications are subject to change without prior notice.

Refer to CEC for Ampacity