

TW75 Cable 600V

PVC

SPECIFICATIONS

- CSA FT1
- CSA C22.2 No. 75
- Lead Free

*Refer to CE Code for details




CONSTRUCTION

Conductor: Annealed solid or stranded, soft copper

Insulation: Flame-retardant (FR), heat and moisture resistant Polyvinyl Chloride (PVC)

Options: Multiple coloured outer jacket and constructions available upon request

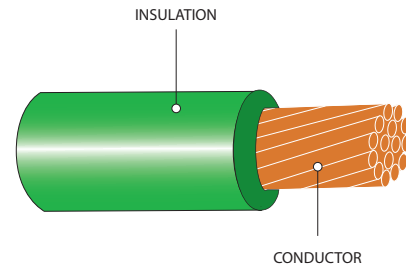

Part Number	AWG Size	Insulation Thickness		Approximate Diameter		Net Weight	
		in.	mm.	in.	mm.	LB/MFT	KG/KM
11005-01-050	14 (1)	0.030	0.762	0.126	3.200	18	27
11005-03-010	10 (1)	0.030	0.762	0.126	3.200	38	58
11005-05-010	12 (7)	0.030	0.762	0.154	3.912	27	41
11005-06-010	10 (7)	0.030	0.762	0.178	4.521	40	61
11005-07-010	8 (7)	0.045	1.143	0.276	7.010	66	99
11005-08-010	6 (7)	0.060	1.524	0.290	7.366	106	159
11005-09-010	4 (7)	0.060	1.524	0.325	8.255	159	237
11005-10-010	3 (7)	0.060	1.524	0.360	9.144	196	293
11005-11-010	2 (7)	0.060	1.524	0.390	9.906	243	362
11005-12-010	1 (19)	0.080	2.032	0.495	12.573	325	484
11005-13-010	1/0 (19)	0.080	2.032	0.536	13.614	399	595
11005-14-050	2/0 (19)	0.080	2.032	0.582	14.783	493	734
11005-15-050	3/0 (19)	0.080	2.032	0.633	16.078	610	908
11005-16-050	4/0 (19)	0.080	2.032	0.691	17.551	756	1126

Note: All dimensions are nominal and are subject to normal manufacturing tolerance. Specifications are subject to change without prior notice.

Refer to CEC for Ampacity