


WIRE PROTECTION PRODUCTS




A

SPIRAL WRAP



- For Protection of Bundles from .059" to 7"
- Install Gapped for Greater Flexibility or Butted for Maximum Abrasion Resistance, Insulation and Rigidity.
- a.k.a.: Reverse Cut, Left-Hand Cut, Counter Clockwise Cut
- Use Cutting Tool WT-1
- Contact Factory for Availability of Custom Colours

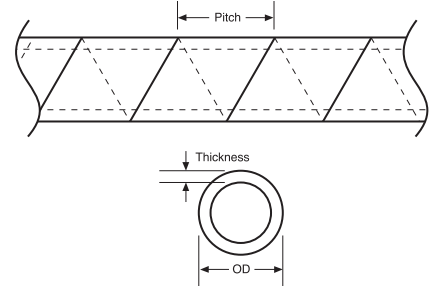

THIN WALL POLYETHYLENE

PART # NATURAL 122°F/50°C	PART # UV BLACK 122°F/50°C	Diameter		Pitch		Nominal Wall Thickness Inch	Min./Max. Bundle Range				UL Flammability	SPOOL LENGTH	
		Inch	(mm)	Inch	(mm)		Inch	(mm)	Inch	(mm)			
SRPE1259C	SRPE1250C	.125	(3.17)	.300	(7.6)	.030	.063	(1.60)	to	.250	(6.35)	Not Rated	100'
SRPE1879C	SRPE1870C	.187	(4.75)	.400	(10.2)	.030	.125	(3.17)	to	1.00	(25.40)		
SRPE2509C	SRPE2500C	.250	(6.35)	.500	(12.7)	.040	.188	(4.75)	to	2.00	(50.80)		
SRPE3759C	SRPE3750C	.375	(9.52)	.550	(13.9)	.050	.313	(7.95)	to	3.00	(76.20)		
SRPE5009C	SRPE5000C	.500	(12.70)	.600	(15.2)	.050	.375	(9.55)	to	4.00	(101.60)		
SRPE6259C	SRPE6250C	.625	(15.87)	.650	(16.5)	.055	.625	(15.87)	to	4.50	(114.30)		
SRPE7509C	SRPE7500C	.750	(19.05)	.850	(21.6)	.062	.750	(19.05)	to	5.00	(127.00)		
SRPE10009C	SRPE10000C	1.00	(25.40)	1.500	(38.1)	.065	1.00	(25.40)	to	7.00	(177.80)		
Tolerance ±		.030	(.762)	.010	(.254)	.005	.015						

- Stocked in 100 foot rolls



HEAVY DUTY POLYETHYLENE

PART # NATURAL 122°F/50°C	PART # UV BLACK 122°F/50°C	Outer Diameter		Nominal Wall Thickness Inch	Min./Max. Bundle Range				UL Flammability	SPOOL LENGTH	
		Inch	(mm)		Inch	(mm)	Inch	(mm)			Inch
SRPE1259C-HD	SRPE1250C-HD	.125	(3.175)	.032	.063	(1.60)	to	.250	(6.35)	Not Rated	100'
SRPE1879C-HD	SRPE1870C-HD	.188	(4.775)	.030	.125	(3.17)	to	1.00	(25.40)		
SRPE2509C-HD	SRPE2500C-HD	.250	(6.350)	.040	.188	(4.75)	to	2.00	(50.80)		
SRPE3759C-HD	SRPE3750C-HD	.375	(9.525)	.052	.313	(7.95)	to	3.00	(76.20)		
SRPE5009C-HD	SRPE5000C-HD	.500	(12.700)	.062	.375	(9.55)	to	4.00	(101.60)		
SRPE6259C-HD	SRPE6250C-HD	.625	(15.875)	.062	.625	(15.87)	to	4.50	(114.30)		
SRPE7509C-HD	SRPE7500C-HD	.750	(19.050)	.065	.750	(19.05)	to	5.00	(127.00)		
SRPE10009C-HD	SRPE10000C-HD	1.00	(25.400)	.070	1.00	(25.40)	to	7.00	(177.80)		
Tolerance ±				.005	.015						



WHITE FIRE RESISTENT POLYETHYLENE SELF-EXTINGUISHING – UL94-V2 RATED

PART # WHITE	Outer Diameter		Nominal Wall Thickness Inch	Min./Max. Bundle Range				SPOOL LENGTH	
	Inch	(mm)		Inch	(mm)	Inch	(mm)		
SRFR250WHC	.250	(6.350)	.040	.188	(4.75)	to	2.00	(50.80)	100'
SRFR375WHC	.375	(9.525)	.052	.313	(7.95)	to	3.00	(76.20)	
SRFR500WHC	.500	(12.700)	.062	.375	(9.55)	to	4.00	(101.60)	
Tolerance ±			.005	.015					



WT-1 Cutting Tool