


1 & 2 Pole relay range

46.52 - 2 Pole 8 A

46.61 - 1 Pole 16 A

- Socket mount or direct connection via Faston connectors
- AC coils & DC coils
- Available with: lockable test button, mechanical indicator & LED indicator
- 8 mm, 6 kV (1.2/50 µs) isolation, coil-contacts
- Cadmium free contacts
- European Patent

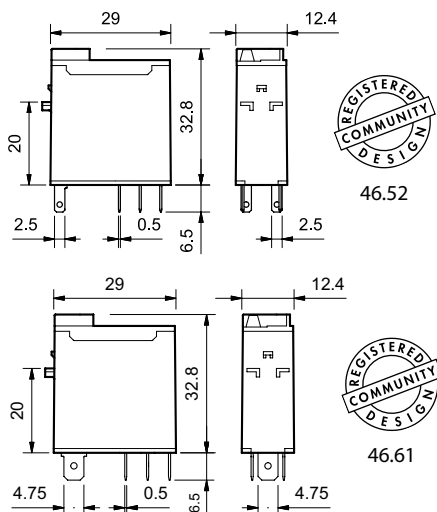

FOR UL RATINGS SEE:

"General technical information" page V

Contact specification

Contact configuration	46.52	46.61
Rated current/Maximum peak current	8/15	16/25*
Rated voltage/Maximum switching voltage	250/440	250/440
Rated load AC1	2000	4000
Rated load AC15 (230 V AC)	350	750
Single phase motor rating (230 V AC)	0.37	0.55
Breaking capacity DC1: 30/110/220 V	6/0.5/0.15	12/0.5/0.15
Minimum switching load	300 (5/5)	300 (5/5)
Standard contact material	AgNi	AgNi

Coil specification

Nominal voltage (U _N)	46.52	46.61
V AC (50/60 Hz)	12 - 24 - 48 - 110 - 120 - 230 - 240	12 - 24 - 48 - 110 - 120 - 230 - 240
V DC	12 - 24 - 48 - 110 - 125	12 - 24 - 48 - 110 - 125
Rated power	1.2/0.5	1.2/0.5
Operating range	(0.8...1.1)U _N	(0.8...1.1)U _N
Holding voltage	0.8 U _N / 0.4 U _N	0.8 U _N / 0.4 U _N
Must drop-out voltage	0.2 U _N / 0.1 U _N	0.2 U _N / 0.1 U _N


Technical data

Technical data	46.52	46.61
Mechanical life AC/DC	10 · 10 ⁶	10 · 10 ⁶
Electrical life at rated load AC1	100 · 10 ³	100 · 10 ³
Operate/release time	10/3	15/5
Insulation between coil and contacts (1.2/50 µs)	6 (8 mm)	6 (8 mm)
Dielectric strength between open contacts	1000	1000
Ambient temperature range	-40...+70	-40...+70
Environmental protection	RT II	RT II


Approvals (according to type)



- 2 Pole CO, 8 A
- Plug-in/Solder terminals



- 1 Pole CO, 16 A
- Plug-in/Faston 187



* With the AgSnO₂ material the maximum peak current is 80 A - 5 ms on normally open contact.

46 Series - Miniature industrial relays 8 - 16 A

Ordering information

Example: 46 series Miniature industrial relay, 1 CO (SPDT), 24 V DC coil, lockable test button and mechanical indicator.

A

Series — 46

Type — 6
5 = Spade/blade solder terminal (2.5 x 0.5)mm
6 = Spade/blade terminal Faston 187 (4.8 x 0.5)mm

No. of poles — 1
1 = 1 pole, 16 A
2 = 2 poles, 8 A

Coil version — 9
9 = DC
8 = AC (50/60 Hz)

Coil voltage — 024
See coil specifications

A: Contact material
0 = AgNi
4 = AgSnO₂ (46.61 only)
5 = AgNi + Au

B: Contact circuit
0 = CO (nPDT)

C: Options
2 = Mechanical indicator
4 = Lockable test button + mechanical indicator
54 = Lockable test button + LED (AC) + mechanical indicator
74 = Lockable test button + double LED (DC non-polarized) + mechanical indicator


D: Special versions
0 = Standard

Selecting features and options: only combinations in the same row are possible.
Preferred selections for best availability are shown in **bold**.

Type	Coil version	A	B	C	D
46.52	AC - DC	0 - 5	0	2 - 4	0
	AC	0 - 5	0	54	/
	DC	0 - 5	0	74	/
46.61	AC - DC	0 - 4 - 5	0	2 - 4	0
	AC	0 - 4 - 5	0	54	/
	DC	0 - 4 - 5	0	74	/



Special versions for Rail Applications on request

Descriptions: Options

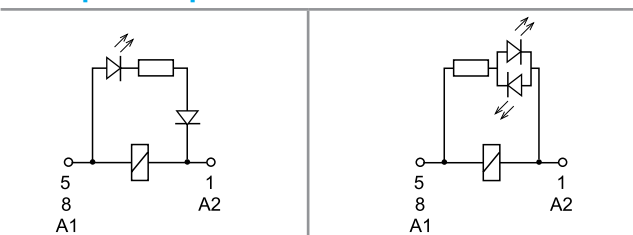

C: Option 54
LED (AC)

C: Option 74
LED (DC, non-polarized)



Lockable test button and mechanical flag indicator (0040, 0054, 0074)

The dual-purpose Finder test button can be used in two ways:

Case 1) The plastic pip (located directly below the test button) remains intact. In this case, when the test button is pushed, the contacts operate. When the test button is released the contacts return to their former state.

Case 2) The plastic pip is broken-off (using an appropriate cutting tool). In this case, (in addition to the above function), when the test button is pushed and rotated, the contacts are latched in the operating state, and remain so until the test button is rotated back to its former position.

In both cases ensure that the test button actuation is swift and decisive.



Technical data

Insulation according to EN 61810-1

		1 pole		2 pole	
Nominal voltage of supply system	V AC	230/400		230/400	
Rated insulation voltage	V AC	250	400	250	400
Pollution degree		3	2	3	2

Insulation between coil and contact set

Type of Insulation		Reinforced (8 mm)	Reinforced (8 mm)
Overvoltage category		III	III
Rated impulse voltage	kV (1.2/50 μ s)	6	6
Dielectric strength	V AC	4000	4000

Insulation between adjacent contacts

Type of insulation		—	Basic
Overvoltage category		—	III
Rated impulse voltage	kV (1.2/50 μ s)	—	4
Dielectric strength	V AC	—	2000

Insulation between open contacts

Type of disconnection		Micro-disconnection	Micro-disconnection
Dielectric strength	V AC/kV (1.2/50 μ s)	1000/1.5	1000/1.5

Conducted disturbance immunity

Burst (5...50)ns, 5 kHz, on A1 - A2		EN 61000-4-4	level 4 (4 kV)
Surge (1.2/50 μ s) on A1 - A2 (differential mode)		EN 61000-4-5	level 3 (2 kV)


Other data

		46.61	46.52
Bounce time: NO/NC	ms	2/6	1/4
Vibration resistance (5...55)Hz: NO/NC	g	20/12	20/15
Shock resistance	g	20	20
Power lost to the environment	without contact current	W	0.6
	with rated current	W	1.6
Recommended distance between relays mounted on PCB	mm	≥ 5	

Contact specification


F 46 - Electrical life (AC) v contact current

Type 46.52

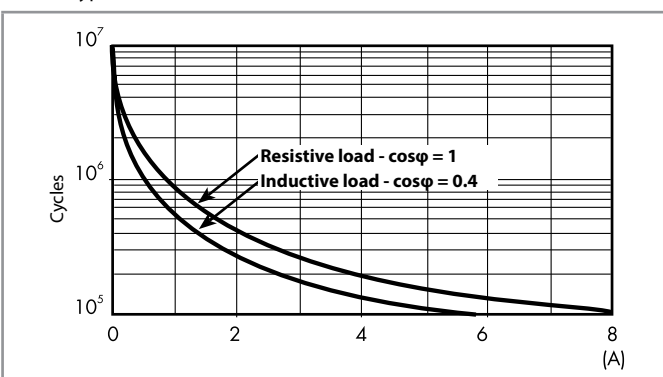


F 46 - Electrical life (AC) v contact current

Type 46.61

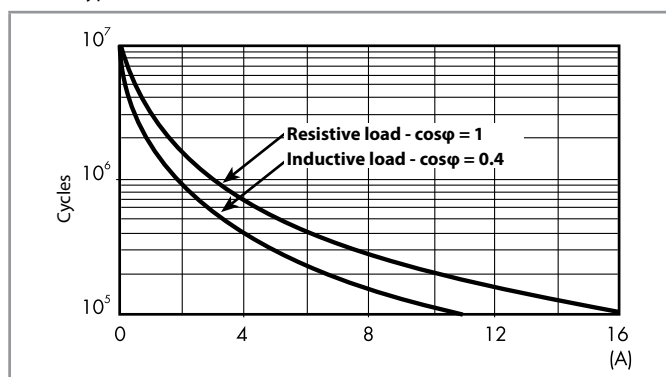

H 46 - Maximum DC1 breaking capacity

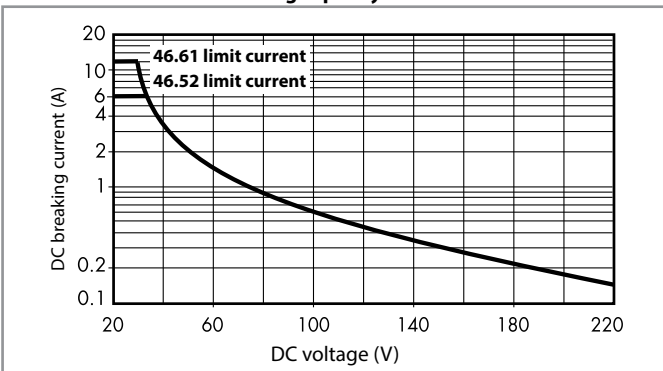

- When switching a resistive load (DC1) having voltage and current values under the curve, an electrical life of $\geq 100 \cdot 10^3$ can be expected.
- In the case of DC13 loads, the connection of a diode in parallel with the load will permit a similar electrical life as for a DC1 load.

Note: the release time for the load will be increased.

Coil specifications

A


DC coil data

Nominal voltage U_N	Coil code	Operating range		Resistance R	Rated coil consumption I at U_N
V		U_{min} V	U_{max} V	Ω	mA
12	9.012	8.8	13.2	300	40
24	9.024	17.5	26.4	1200	20
48	9.048	35	52.8	4800	10
110	9.110	80	121	23500	4.7
125	9.125	91.2	138	32000	3.9

AC coil data

Nominal voltage U_N	Coil code	Operating range		Resistance R	Rated coil consumption I at U_N
V		U_{min} V	U_{max} V	Ω	mA
12	8.012	9.6	13.2	80	90
24	8.024	19.2	26.4	320	45
48	8.048	38.4	52.8	1350	21
110	8.110	88	121	6900	9.4
120	8.120	96	132	9000	8.4
230	8.230	184	253	28000	5
240	8.240	192	264	31500	4.1


46 - DC coil operating range v ambient temperature

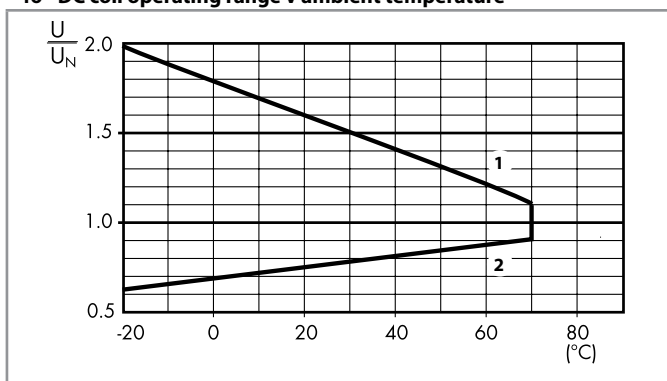

1 - Max. permitted coil voltage.

2 - Min. pick-up voltage with coil at ambient temperature.

R 46 - AC coil operating range v ambient temperature

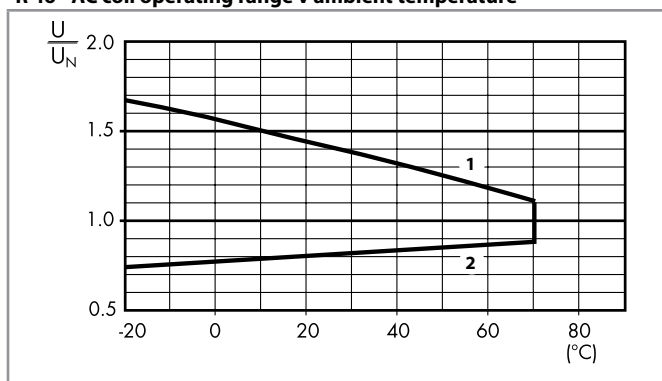

1 - Max. permitted coil voltage.

2 - Min. pick-up voltage with coil at ambient temperature.