

94 Series - Sockets and accessories for 85 series timers



94.74

Approvals
(according to type):

94.82

Approvals
(according to type):**Screw terminal (Plate clamp) socket**
panel or 35 mm rail (EN 60715) mount

For timer type

94.72
Blue**94.72.0**
Black**94.73**
Blue**94.73.0**
Black**94.74**
Blue**94.74.0**
Black

85.02

85.03

85.02, 85.04

Accessories

Metal retaining clip (supplied with timer)

094.81

Screw terminal socket
panel or 35 mm rail (EN 60715) mount**94.82**
Blue**94.82.0**
Black

For timer type

85.02

85.02

Accessories

Metal retaining clip (supplied with timer)

094.81

Technical data

Rated values

10 A - 250 V

Dielectric strength

2 kV AC

Protection category

IP 20

Ambient temperature

°C -40...+70

Screw torque

Nm

0.5

Wire strip length

mm

8 (94.72, 94.73, 94.74)

9 (94.82)

Max. wire size for 94.72, 94.73, 94.74 and 94.82 sockets


solid wire
mm²
AWG

1 x 2.5 / 2 x 1.5


stranded wire

1 x 2.5 / 2 x 1.5


1 x 14 / 2 x 16




94.72




94.72




94.73




94.73



94.74



94.74

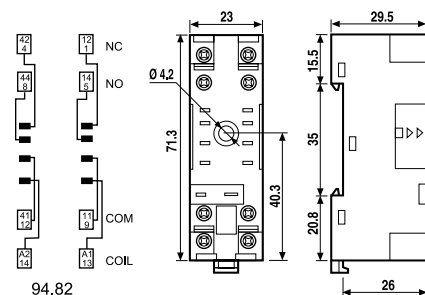

94.82

94.82