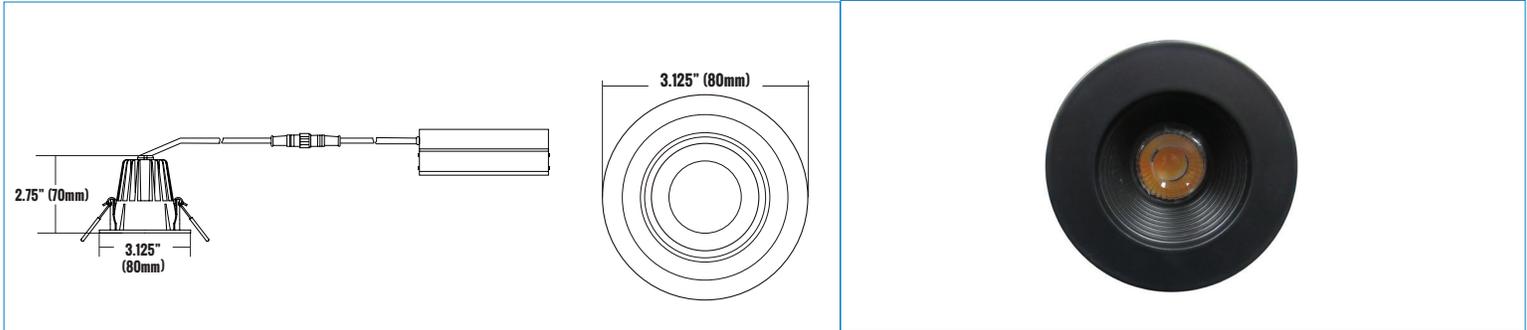


CATALOG #		TYPE
PROJECT		DATE
PREPARED BY		

PRODUCT CODE: DLRBR2-813WD-BL
2 INCH LED BAFFLE DOWNLIGHT / ROUND


PRODUCT DESCRIPTION

The new Etlin-Daniels DLRBR2-813WD-BL 2 inch Baffle Recessed Downlight with Warm Dim offers a sleek and fresh looking, energy efficient solution for retrofitting existing halogen and incandescent fixtures, or for new construction. Requiring only a 2-5/8" round hole for both Round and Square housings, and with the driver inside a compact connection box (does not require an external j-box), the DLRBR2 and DLRBS2 series are simple to install and are both IC and Airtight.

The 36° beam pattern, recessed into the Die Cast Aluminum baffle housing provides for even and glare-free illumination. Triac Dimmable in 3000K & 4000K with the Warm Dim feature - 3000K dims down to 2200K / 4000K dims down to 3000K. Available in both round - DLRBR2 and square - DLRBS2, in white, black and brushed nickel housings. Perfect for high end display purposes with >90CRI and an R9 rating of greater than 50.

FEATURES

- LED Indoor Light Source.
- 2" Baffle Recessed Downlight.
- Durable die-cast aluminum alloy for optimal heat dissipation.
- Scratch resistant, smooth powder coat finish.
- Type IC and Airtight. Damp location rated.
- 90CRI. R9 greater than 50.
- Triac Warm Dim down to 10%.
- Warm Dim - 3000K dims to 2200K // 4000K dims to 3000K.
- Round & Square housings available in white, black and brushed nickel.
- 5 year warranty.
- L70 - 50,000 hours.
- Energy Star Listed.

PRODUCT SPECIFICATIONS (OPTICAL DATA)

PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

LED TYPE	LED QTY	SYSTEM EFFICACY	LUMENS	COLOR TEMPERATURE	BEAM ANGLE	R9	CRI	SYSTEM EFFICIENCY	VOLTAGE	POWER FREQ.	POWER FACTOR
COB	1 CHIP	75LM/W	600LM	3000K-2200K	36°	>50	>90CRI	>80%	AC120V	50-60HZ	>0.90

PRODUCT SPECIFICATIONS

WATTAGE	FIXTURE MATERIAL	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE	
8W	DIE CAST ALUMINUM	>50,000 HOURS	-20°C~+80°C -4°F~+176°F	-18°C~+49°C -0°F~+120°F	3.13 X 3.13 X 2.75 INCHES (80 X 80 X 70MM)	5.5 X 3.94 X 3.15 INCHES (140 X 100 X 80MM)	

ADDITIONAL INFORMATION

INSTALLATION METHOD

RECESSED CEILING MOUNT

FIXTURE COLOR

BLACK

CONTROL TYPE

TRIAC WARM DIM


CATALOG #		TYPE
PROJECT		DATE
PREPARED BY		

PRODUCT CODE: DLRBR2-813WD-BL


2 INCH LED BAFFLE DOWNLIGHT / ROUND

LUMINAIRE PHOTOMETRIC (TEST REPORT)

ILLUMINANCE (AT A DISTANCE) FLUX OUT: 422.8LM

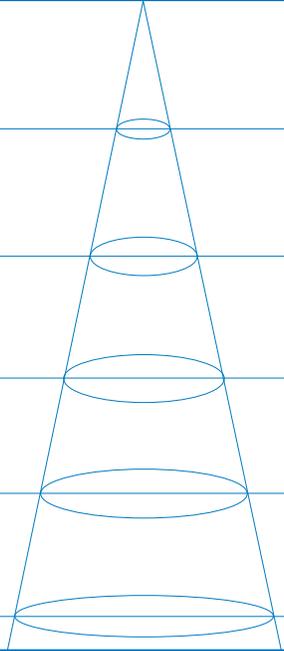3.28FT 1M	76.59,113.9FC 824.4,1226LX		2.524FT 76.93CM
6.56FT 2M	19.15,28.47FC 206.1,306.5LX		5.048FT 153.85CM
9.84FT 3M	8.510,12.651FC 91.61,136.2LX		7.571FT 230.78CM
13.12FT 4M	4.787,7.118FC 51.53, 76.62LX		10.1FT 307.70CM
16.4FT 5M	3.064, 4.555FC 32.98, 49.03LX		12.62FT 384.63CM
HT	EAVG/EMAX	ANGLE: 42.08DEG	DIA

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

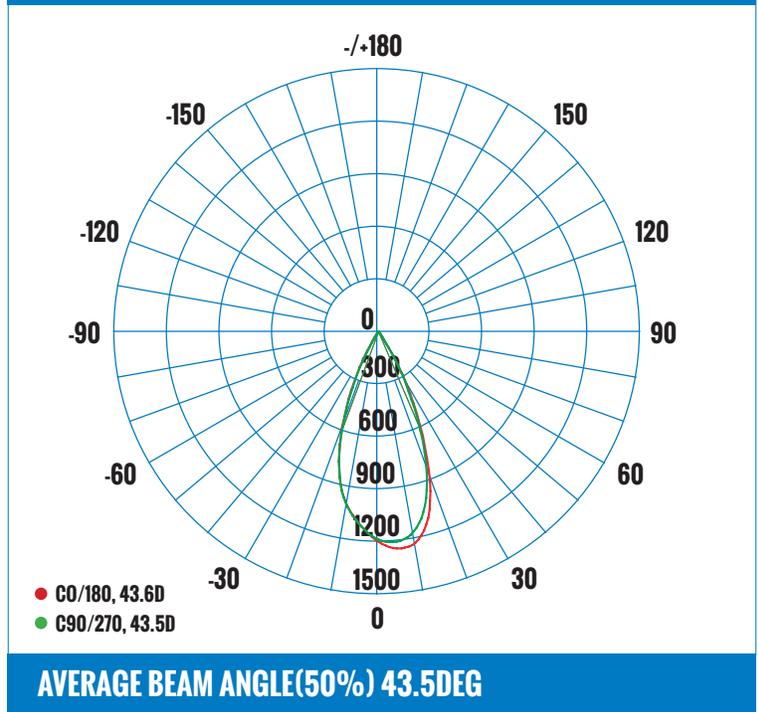

CERTIFICATIONS



DRIVER/LED CHIP



120V APPROVED DIMMERS

LUTRON: CTCL-153PDH · CTCL-153P
 ·CT-600P · DVCL-153P
 LEVITON: 6672 · 6674
 COOPER: HCL453PTCCCV6
 ETLIN DANIELS: DS-1SD-G-WH · DS-1SDD-G-WH
 ·DS-1TD-G-WH · DS-1TDD-G-WH

ACCESSORIES



ROUGH-IN PLATE
PART# DLRB-MP



72" EXTENSION CORD
PART# DLSGR3-EC72



240" EXTENSION CORD
PART# DLSGR3-EC240

ORDERING INFORMATION - DLRBR SERIES

SERIES	SHAPE	SIZE	WATTAGE	VOLTAGE	COLOR TEMPERATURE	DIMMABLE	COLOR
E.G. DLRB	R	2	8	1	3	WD	BL
DLRB - DOWN LIGHT	R - ROUND	2"	8 - 8W	1 - 120V	3 - 3000K	WD - WARM DIM	WH - WHITE
RECESSED BAFFLE							BL - BLACK
							BN - BRUSHED NICKEL

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · Tel: 416.741.7336 · Fax: 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions · sales@etlin.com