

LED 2x2 Panel



LED Flat Panel 2x2 40 Watt 4000 Lumens 4000K



Product Description

The 2x2 LED Panel light is constructed using an extruded aluminum frame with an attractive impact resistant acrylic lens that helps achieve a wide light distribution pattern. These Panel lights are ideal for use in offices, schools, healthcare, and many other commercial applications. Designed to easily replace 2x2 fluorescent fixtures in retrofit or new construction projects.

This 2x2 panel features 120/277V dual voltage operation and is equipped standard with a 0 - 10 Volt continuous dimming driver that works with any standard 0 - 10 Volt control/dimmer. The dimming range is 10% to 100%; varies by control device. The 4000K light and high 82+CRI provides a bright natural light solution. Hanger kits and surface mount kits available (see below). 347 volt operation models available.

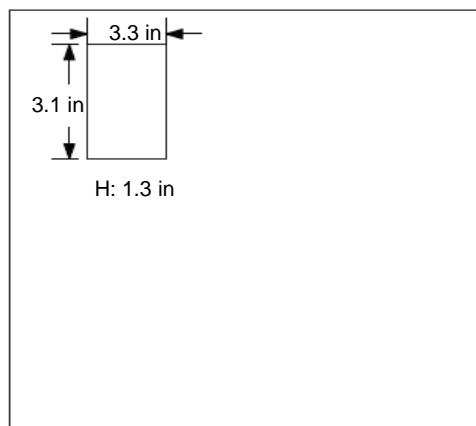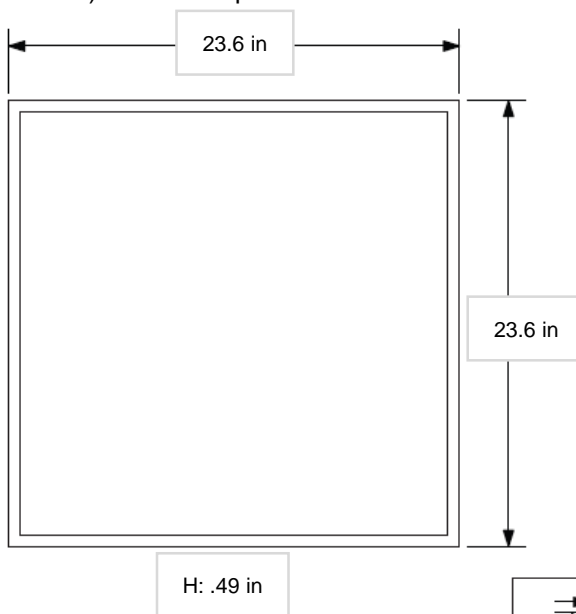

Order Code: 10387 – 2pk
10385 – 1pk

- **Important ordering note:** Please order in 2-packs. Only order single packs when an odd number of Panel Lights is required on a job site.

DLC Product ID: PT9CSBQY

Model: LFP2X24040D

Accessories (Ordered Separately)

- Surface Mount Kits 2x2 – Order Code: 10458
- Wire Hanger Kit 2x2 - Order Code: 10465

Electrical	
Watt	40
Voltage	120-277V
Min. Start Temperature	-40°C
Max. Operating Temperature	40°C
Driver Type	Class2
Driver Output	27-42V Direct Current
Dimming	0 – 10 Volt
Light	
Initial Lumens	4000
Lumens per Watt	100
Color Temperature	4000K
Color Rendering (CRI)	80
Beam Angle	150°
Agency Approvals	
DLC	Yes
FCC	Yes
ETL	Yes
Product Details	
Housing Material	Extruded Aluminum
Lens Material	Acrylic
Warranty	5 years
Rated Life	50,000 hours

