



MARCUS

Marcus Transformer LTD
Phone: 1-800-267-7376
Fax: 1-866-205-7526
Email: Info@marcustransformer.com

TECHNICAL DATA MODEL: MS 3A2

1-PHASE ISOLATING

DESCRIPTION	
Type	DRY TYPE DISTRIBUTION (ANN)
KVA	3
Primary (Volts)	600
Secondary (Volts)	120 / 240
Phase	1
Enclosure	NEMA 1
Impedance (%z)	5.1
Insulation Class	220°C
Temperature Rise	150°C
Frequency	60Hz
Weight (LBS/KG)	50 / 23
Polarity	Additive
BIL.	10KV


Primary connectors per phase : #14-2
Secondary connectors per phase: #14-2

FEATURES:

- Anti-vibration pads installed between the core/coil and the enclosure
- Ground lug provided
- Leads brought-up and solidly positioned into separate terminal boards
- CSA enclosure: ventilated painted ASA 61gray
- Copper windings
- Copper ground strap between core/coil and enclosure
- CSA certified / UL listed

PERFORMANCE	
No load loss	22W
Total loss	197W
Noise level	45dB

EFFICIENCY			
			Efficiency = 93.7%

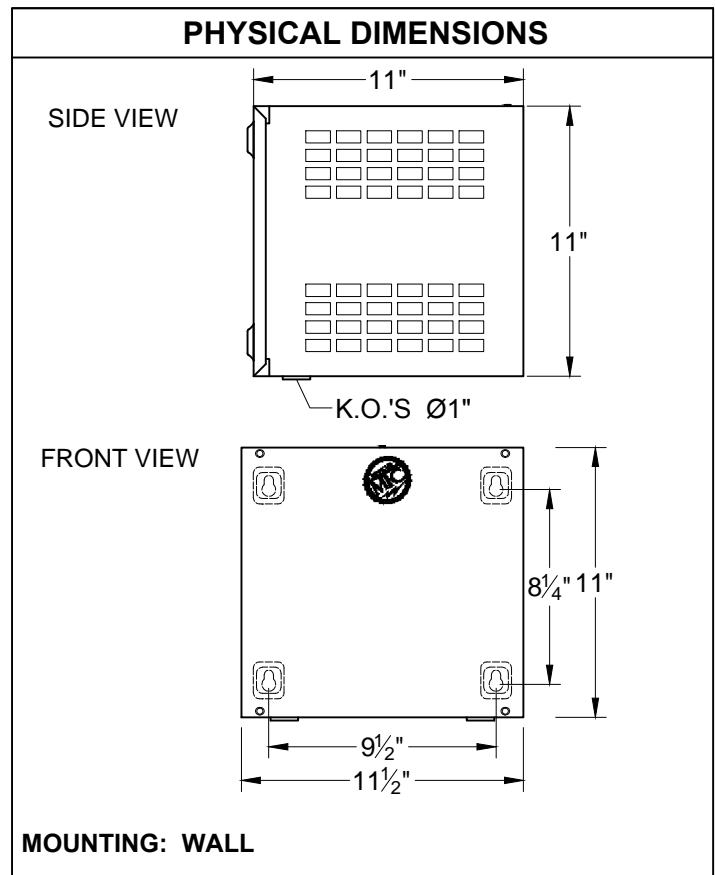

Customer / PO		COMMENTS
Project		
Engineer		
Contractor		
Revision Date		



MARCUS

Marcus Transformer LTD
Phone: 1-800-267-7376
Fax: 1-866-205-7526
Email: Info@marcustransformer.com

TECHNICAL DATA MODEL: MS 3B2

1-PHASE ISOLATING

DESCRIPTION	
Type	DRY TYPE DISTRIBUTION (ANN)
KVA	3
Primary (Volts)	480
Secondary (Volts)	120 / 240
Phase	1
Enclosure	NEMA 1
Impedance (%z)	5.1
Insulation Class	220°C
Temperature Rise	150°C
Frequency	60Hz
Weight (LBS/KG)	50 / 23
Polarity	Additive
BIL.	10KV


Primary connectors per phase : #14-2
Secondary connectors per phase: #14-2

FEATURES:

- Anti-vibration pads installed between the core/coil and the enclosure
- Ground lug provided
- Leads brought-up and solidly positioned into separate terminal boards
- CSA enclosure: ventilated painted ASA 61gray
- Copper windings
- Copper ground strap between core/coil and enclosure
- CSA certified / UL listed

PERFORMANCE	
No load loss	22W
Total loss	197W
Noise level	45dB

EFFICIENCY			
			Efficiency = 93.7%

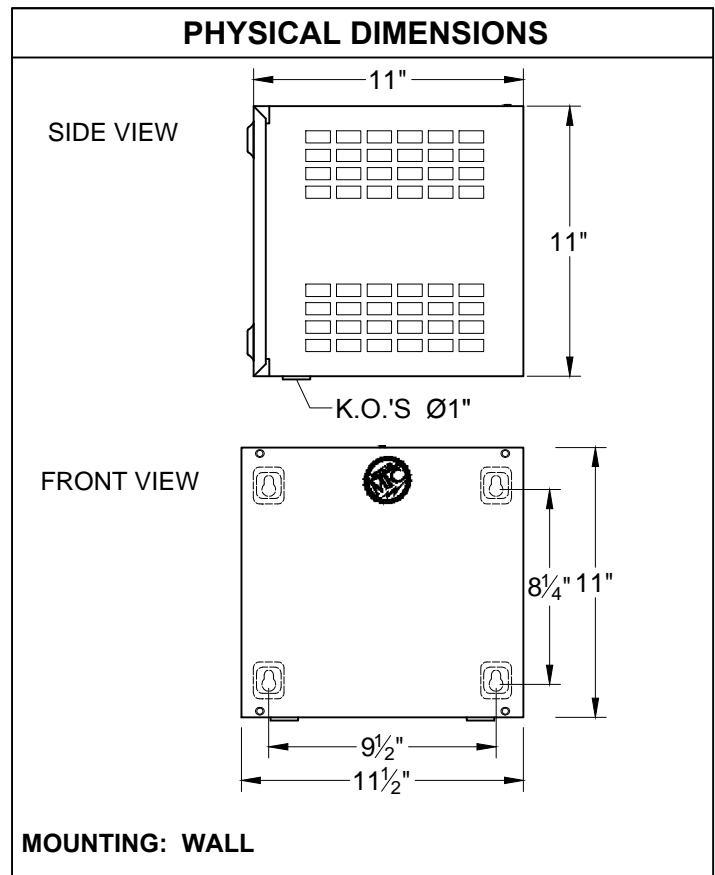

Customer / PO		COMMENTS
Project		
Engineer		
Contractor		
Revision Date		