



MARCUS

Marcus Transformer LTD
Phone: 1-800-267-7376
Fax: 1-866-205-7526
Email: Info@marcustransformer.com

TECHNICAL DATA MODEL: MS 25A2

1-PHASE ISOLATING

DESCRIPTION	
Type	DRY TYPE DISTRIBUTION (ANN)
KVA	25
Primary (Volts)	600
Secondary (Volts)	120 / 240
Phase	1
Enclosure	NEMA 1
Impedance (%Z)	4.0
Insulation Class	220°C
Temperature Rise	150°C
Frequency	60Hz
Weight (LBS/KG)	200 / 90
Polarity	Additive
BIL.	10KV


PERFORMANCE	
No load loss	88W
Total loss	670W
Noise level	45dB

EFFICIENCY	
	Efficiency = 98.0% (As per CSA C802.2 & NEMA TP-1)

Primary connectors per phase : #10-2/0
Secondary connectors per phase: #10-2/0

FEATURES:

- Anti-vibration pads installed between the core/coil and the enclosure
- Ground lug provided
- Leads brought-up and solidly positioned into separate terminal boards
- CSA enclosure: ventilated painted ASA 61gray
- Transformer meets the efficiency values as per CSA C802.2 / NEMA TP-1
- Copper ground strap between core/coil and enclosure
- CSA certified / UL listed
- Copper windings

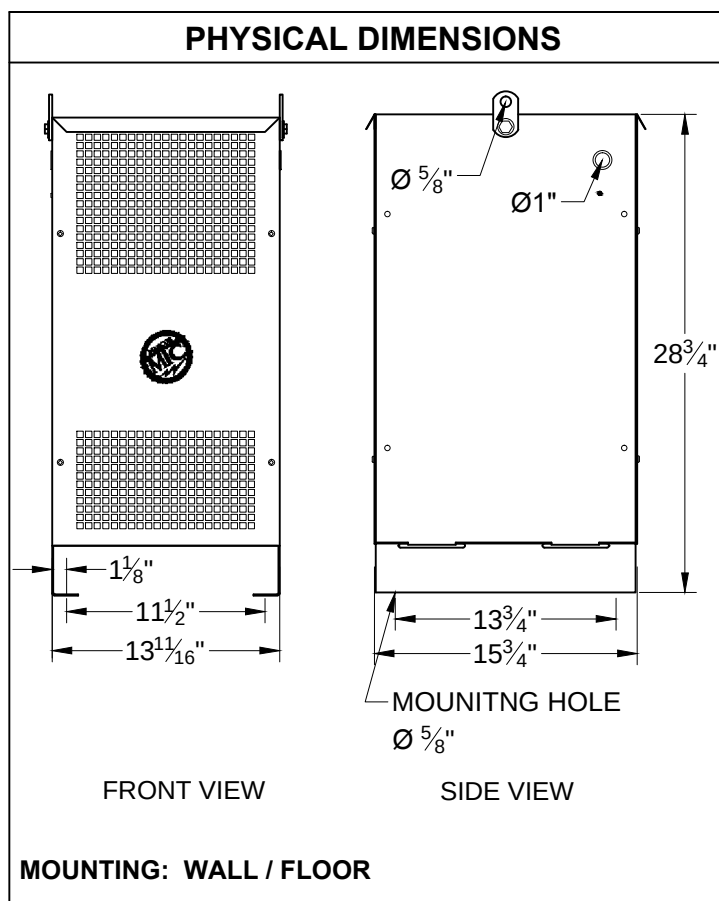

COMMENTS	
Customer / PO	
Project	
Engineer	
Contractor	
Revision Date	



MARCUS

Marcus Transformer LTD
Phone: 1-800-267-7376
Fax: 1-866-205-7526
Email: Info@marcustransformer.com

TECHNICAL DATA MODEL: MS 25B2

1-PHASE ISOLATING

DESCRIPTION	
Type	DRY TYPE DISTRIBUTION (ANN)
KVA	25
Primary (Volts)	480
Secondary (Volts)	120 / 240
Phase	1
Enclosure	NEMA 1
Impedance (%Z)	4.0
Insulation Class	220°C
Temperature Rise	150°C
Frequency	60Hz
Weight (LBS/KG)	200 / 90
Polarity	Additive
BIL.	10KV


PERFORMANCE	
No load loss	88W
Total loss	670W
Noise level	45dB

EFFICIENCY	
	Efficiency = 98.0%
	(As per CSA C802.2 &
	NEMA TP-1)

Primary connectors per phase : #10-2/0
Secondary connectors per phase: #10-2/0

FEATURES:

- Anti-vibration pads installed between the core/coil and the enclosure
- Ground lug provided
- Leads brought-up and solidly positioned into separate terminal boards
- CSA enclosure: ventilated painted ASA 61gray
- Transformer meets the efficiency values as per CSA C802.2 / NEMA TP-1
- Copper ground strap between core/coil and enclosure
- CSA certified / UL listed
- Copper windings

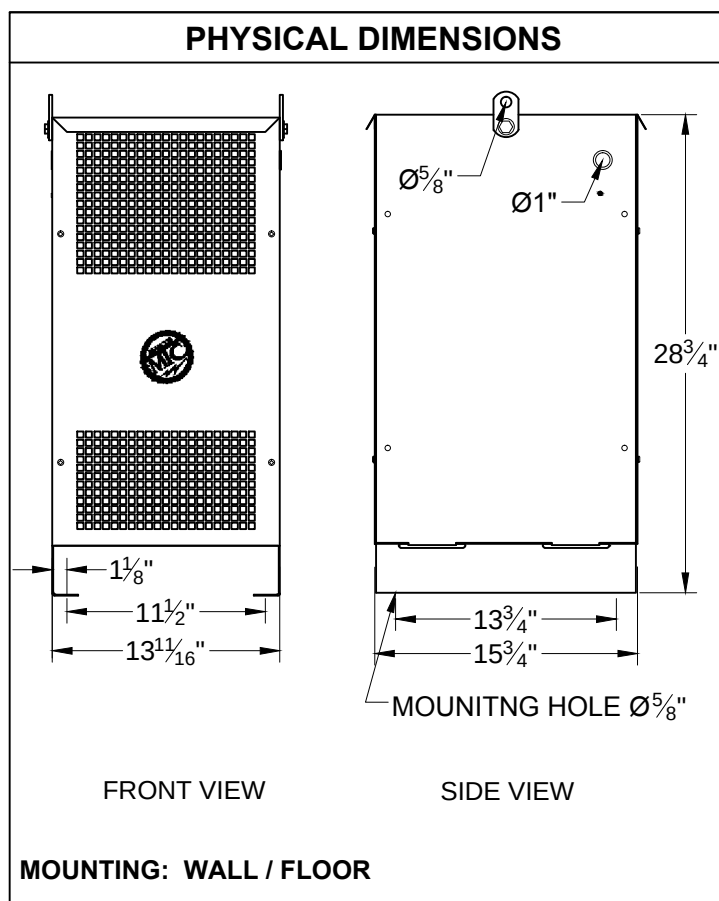

COMMENTS	
Customer / PO	
Project	
Engineer	
Contractor	
Revision Date	