



PAR30/PAR20 LED

12PAR30L/AMB/F25/830/DIM ULW

Philips PAR30 and PAR20 LED Single Optic Lamps provide superior lighting aesthetics and optimal thermal efficiency in a sleek, lightweight design.

Product data


General Information	
Cap-Base	E26 [Single Contact Medium Screw]
Bulb Shape	PAR30L [PAR 3.75 inch/95mm Long]
Nominal Lifetime (Nom)	25000 h
Switching Cycle	50000X
Technical Type	12-75W
Light Technical	
Color Code	830 [CCT of 3000K]
Beam Angle (Nom)	25 °
Initial lumen (Nom)	850 lm
Luminous Flux (Rated) (Nom)	850 lm
Luminous Intensity (Nom)	3300 cd
Color Designation	White (WH)
Rated Beam Angle	25 °
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	70.83 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	12 W

Lamp Current (Nom)	110 mA
Wattage Equivalent	75 W
Starting Time (Nom)	0.5 s
Warm Up Time To 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.9
Voltage (Nom)	120 V
Temperature	
T-Case Maximum (Nom)	85 °C
Controls and Dimming	
Dimmable	Yes
Approval and Application	
Energy Saving Product	Yes
Suitable For Accent Lighting	Yes
Approbation Marks	Energy Star
Product Data	
Order product name	12PAR30L/AMB/F25/830/DIM ULW
EAN/UPC - Product	046677467821
Order code	467829
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6

PAR30/PAR20 LED

Material Nr. (12NC)	929001294104
Net Weight (Piece)	0.285 kg

Dimensional drawing




12PAR30L/AMB/F25/830/DIM ULW

Product	D	C
---------	---	---

Photometric data

Accent Lighting - Spots

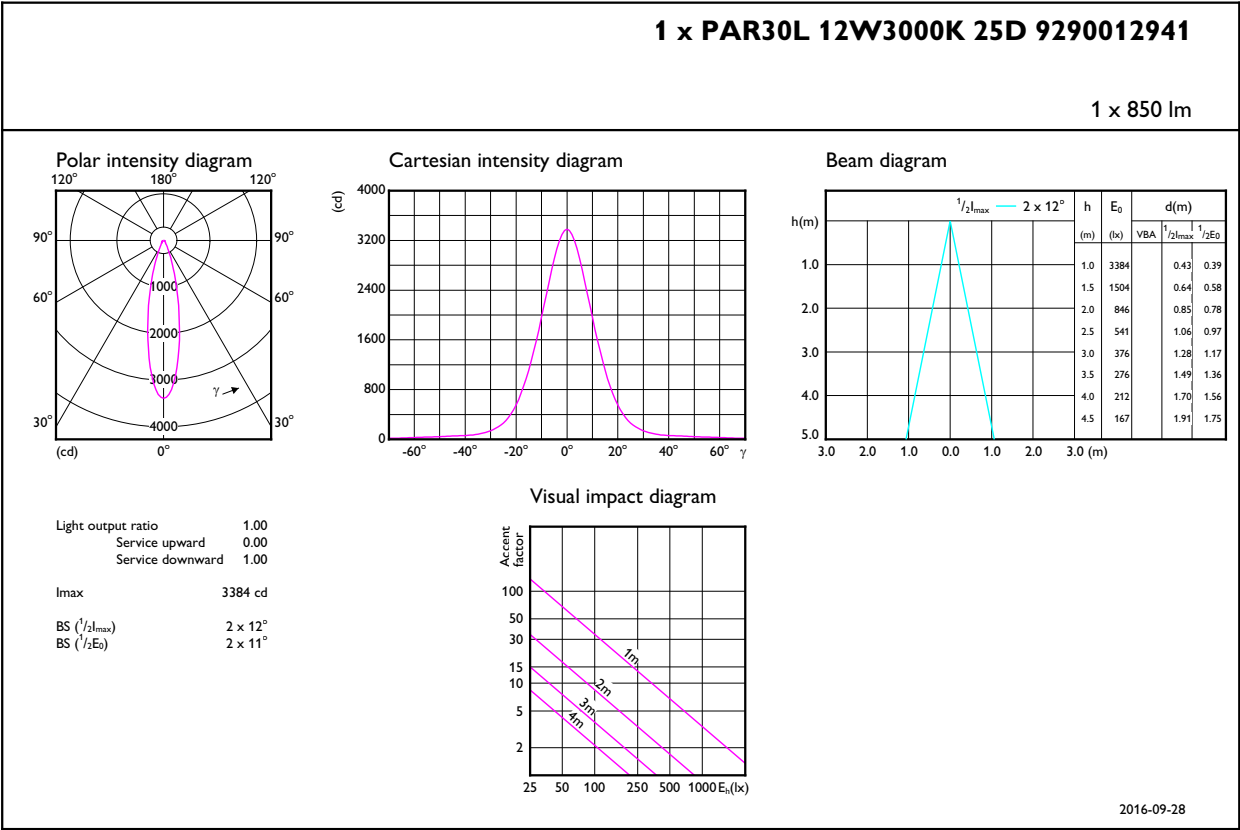

PAR30/PAR20 LED

