



A smooth design solution for a seamless look

PAR30/PAR20 LED

Philips PAR30 and PAR20 LED Single Optic Lamps provide superior lighting aesthetics and optimal thermal efficiency in a sleek, lightweight design.

Benefits

- Will not fade colors, avoids inventory spoilage
- Lowers maintenance costs by reducing re-lamp frequency
- 5-year limited warranty**
- ** For details see:
http://www.usa.lighting.philips.com/connect/tools_literature/warranties.wpd.

Features

- 25,000-hour rated average life*
- Virtually UV/IR free in the beam
- Contains no mercury

Application

- Ideal for general and accent lighting in retail, hospitality and office spaces.

PAR30/PAR20 LED

Versions



E26 PAR30S



12.5 W E26 PAR30S Black



E26 PAR30S



E26 PAR30L



E26 PAR30S



E26 PAR20



E26 PAR20



E26 PAR30L







E26 PAR30S

Dimensional drawing

Product	D	C
120V PAR20 SO 6W 35D 2700K DIM	63.2 mm	82.6 mm
120V PAR20 SO 6W 35D 3000K DIM	63.2 mm	82.6 mm
120V PAR20 SO 6W 25D 3000K DIM Black	63.2 mm	82.6 mm
120V PAR20 SO 6W 25D 2700K DIM Black	63.2 mm	82.6 mm
120V PAR20 SO 6W 35D 4000K DIM	63.2 mm	82.6 mm
120V PAR20 SO 6W 25D 2700K DIM	63.2 mm	82.6 mm
120V PAR20 SO 6W 25D 3000K DIM	63.2 mm	82.6 mm
120V PAR20 SO 6W 15D 2700K DIM	63.2 mm	82.6 mm
120V PAR20 SO 6W 25D 4000K DIM	63.2 mm	82.6 mm

PAR30/PAR20 LED

Dimensional drawing

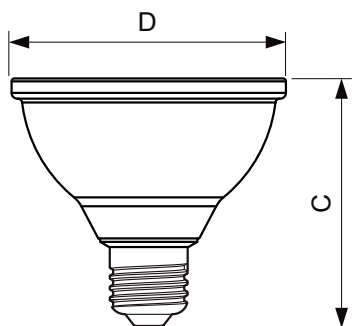

Product	D	C
12 PAR30S/F25 2700 DIM Black	92 mm	92.7 mm
120V PAR30S 12W 25D 3000K 900 D AF SO	92 mm	92.7 mm
120V PAR30S 12W 35D 2700K 900 D AF SO	92 mm	92.7 mm
120V PAR30S 12W 25D 4000K 900 D AF SO	92 mm	92.7 mm
120V PAR30S 12W 15D 3000K 900 D AF SO	92 mm	92.7 mm
120V PAR30S 12W 25D 2700K 900 D AF SO	92 mm	92.7 mm
120V PAR30S 12W 15D 2700K 900 D AF SO	92 mm	92.7 mm
120V PAR30S 12.5W 15D 3000K 780 CW SOB	92 mm	93 mm
120V PAR30S 12.5W 15D 3000K 780 CW SO	92 mm	93 mm

Product	D	C
120V PAR30L 12.7W 35D 4000K 900 D SO	92 mm	116 mm
120V PAR30L 12.7W 25D 4000K 900 D SO	92 mm	116 mm
120V PAR30L 12.7W 25D 3000K 900 D SO	92 mm	116 mm
120V PAR30L 12.7W 25D 2700K 900 D SO	92 mm	116 mm
120V PAR30L 12.7W 35D 2700K 900 D SO	92 mm	116 mm
120V PAR30L 12.7W 35D 3000K 900 D SO	92 mm	116 mm

Product	D	C
12PAR30S/AMB/F40/827/DIM ULW	95 mm	95 mm
12PAR30S/AMB/F25/830/DIM ULW	95 mm	95 mm
12PAR30S/AMB/F25/827/DIM ULW	95 mm	95 mm
12PAR30S/AMB/F40/840/DIM ULW	95 mm	95 mm
12PAR30S/AMB/F25/840/DIM ULW	95 mm	95 mm
12PAR30S/AMB/F40/830/DIM ULW	95 mm	95 mm

Product	D	C
12PAR30L/AMB/F25/827/DIM ULW	95 mm	115 mm
12PAR30L/AMB/F40/830/DIM ULW	95 mm	115 mm
12PAR30L/AMB/F40/840/DIM ULW	95 mm	115 mm
12PAR30L/AMB/F25/830/DIM ULW	95 mm	115 mm
12PAR30L/AMB/F25/840/DIM ULW	95 mm	115 mm
12PAR30L/AMB/F40/827/DIM ULW	95 mm	115 mm

PAR30/PAR20 LED

Operating and Electrical	
Voltage (Nom)	120 V
Starting Time (Nom)	0.5 s
General Information	
Cap-Base	E26
Light Technical	
Color Rendering Index (Nom)	80
Llmf At End Of Nominal Lifetime (Nom)	70 %

Approval and Application

Order Code	Full Product Name	Energy Consumption kWh/1000 h	Energy Efficiency Label (EEL)
434928	12PAR30S/S15 3000 CW SO 6/1	13 kWh	A
434936	12PAR30S/S15 3000 CW SO-B 6/1	13 kWh	A
435263	12PAR30S/S15 2700 DIM AF SO 6/1	-	Not applicable
435271	12PAR30S/S15 3000 DIM AF SO 6/1	-	Not applicable
435297	12PAR30S/F25 2700 DIM AF SO 6/1	-	Not applicable
435305	12PAR30S/F25 3000 DIM AF SO 6/1	-	Not applicable
435313	12PAR30S/F25 4000 DIM AF SO 6/1	-	Not applicable
435321	12PAR30S/F36 2700 DIM AF SO 6/1	-	Not applicable
454660	12.5PAR30L/F25 2700 DIM SO	-	Not applicable
454678	12.5PAR30L/F25 3000 DIM SO	-	Not applicable
454686	12.5PAR30L/F25 4000 DIM SO	-	Not applicable
454694	12.5PAR30L/F35 2700 DIM SO	-	Not applicable
454702	12.5PAR30L/F35 3000 DIM SO	-	Not applicable
454710	12.5PAR30L/F35 4000 DIM SO	-	Not applicable
459644	12PAR30S/LED/827/F25 DIM AF SO-B 6/1	-	Not applicable
463729	6PAR20/LED/827/S15/DIM SO 120V 6/1	-	Not applicable
463646	6PAR20/LED/827/F25/DIM SO 120V 6/1	-	Not applicable
463653	6PAR20/LED/830/F25/DIM SO 120V 6/1	-	Not applicable
463661	6PAR20/LED/840/F25/DIM SO 120V 6/1	-	Not applicable

Order Code	Full Product Name	Energy Consumption kWh/1000 h	Energy Efficiency Label (EEL)
463679	6PAR20/LED/827/F35/DIM SO 120V 6/1	-	Not applicable
463687	6PAR20/LED/830/F35/DIM SO 120V 6/1	-	Not applicable
463695	6PAR20/LED/840/F35/DIM SO 120V 6/1	-	Not applicable
463703	6PAR20/LED/827/F25/DIM SO-B 120V 6/1	-	Not applicable
463711	6PAR20/LED/830/F25/DIM SO-B 120V 6/1	-	Not applicable
467811	12PAR30L/AMB/F25/827/DIM ULW	-	-
467829	12PAR30L/AMB/F25/830/DIM ULW	-	-
467837	12PAR30L/AMB/F25/840/DIM ULW 6/1	-	-
467845	12PAR30L/AMB/F40/827/DIM ULW	-	-
467852	12PAR30L/AMB/F40/830/DIM ULW	-	-
467860	12PAR30L/AMB/F40/840/DIM ULW	-	-
467878	12PAR30S/AMB/F25/827/DIM ULW	-	-
467886	12PAR30S/AMB/F25/830/DIM ULW	-	-
467894	12PAR30S/AMB/F25/840/DIM ULW	-	-
467902	12PAR30S/AMB/F40/827/DIM ULW	-	-
467910	12PAR30S/AMB/F40/830/DIM ULW	-	-
467928	12PAR30S/AMB/F40/840/DIM ULW	-	-

Controls and Dimming

Order Code	Full Product Name	Dimmable
434928	12PAR30S/S15 3000 CW SO 6/1	No
434936	12PAR30S/S15 3000 CW SO-B 6/1	No
435263	12PAR30S/S15 2700 DIM AF SO 6/1	Yes
435271	12PAR30S/S15 3000 DIM AF SO 6/1	Yes
435297	12PAR30S/F25 2700 DIM AF SO 6/1	Yes
435305	12PAR30S/F25 3000 DIM AF SO 6/1	Yes
435313	12PAR30S/F25 4000 DIM AF SO 6/1	Yes
435321	12PAR30S/F36 2700 DIM AF SO 6/1	Yes
454660	12.5PAR30L/F25 2700 DIM SO	Yes
454678	12.5PAR30L/F25 3000 DIM SO	Yes
454686	12.5PAR30L/F25 4000 DIM SO	Yes
454694	12.5PAR30L/F35 2700 DIM SO	Yes

Order Code	Full Product Name	Dimmable
454702	12.5PAR30L/F35 3000 DIM SO	Yes
454710	12.5PAR30L/F35 4000 DIM SO	Yes
459644	12PAR30S/LED/827/F25 DIM AF SO-B 6/1	Yes
463729	6PAR20/LED/827/S15/DIM SO 120V 6/1	Yes
463646	6PAR20/LED/827/F25/DIM SO 120V 6/1	Yes
463653	6PAR20/LED/830/F25/DIM SO 120V 6/1	Yes
463661	6PAR20/LED/840/F25/DIM SO 120V 6/1	Yes
463679	6PAR20/LED/827/F35/DIM SO 120V 6/1	Yes
463687	6PAR20/LED/830/F35/DIM SO 120V 6/1	Yes
463695	6PAR20/LED/840/F35/DIM SO 120V 6/1	Yes
463703	6PAR20/LED/827/F25/DIM SO-B 120V 6/1	Yes
463711	6PAR20/LED/830/F25/DIM SO-B 120V 6/1	Yes

PAR30/PAR20 LED

Order Code	Full Product Name	Dimmable
467811	12PAR30L/AMB/F25/827/DIM ULW	Yes
467829	12PAR30L/AMB/F25/830/DIM ULW	Yes
467837	12PAR30L/AMB/F25/840/DIM ULW 6/1	Yes
467845	12PAR30L/AMB/F40/827/DIM ULW	Yes
467852	12PAR30L/AMB/F40/830/DIM ULW	Yes
467860	12PAR30L/AMB/F40/840/DIM ULW	Yes

Order Code	Full Product Name	Dimmable
467878	12PAR30S/AMB/F25/827/DIM ULW	Yes
467886	12PAR30S/AMB/F25/830/DIM ULW	Yes
467894	12PAR30S/AMB/F25/840/DIM ULW	Yes
467902	12PAR30S/AMB/F40/827/DIM ULW	Yes
467910	12PAR30S/AMB/F40/830/DIM ULW	Yes
467928	12PAR30S/AMB/F40/840/DIM ULW	Yes

Operating and Electrical

Order Code	Full Product Name	Input Frequency	Wattage Equivalent	Power (Rated) (Nom)
434928	12PAR30S/S15 3000 CW SO 6/1	60 Hz	60 W	12.5 W
434936	12PAR30S/S15 3000 CW SO-B 6/1	60 Hz	60 W	12.5 W
435263	12PAR30S/S15 2700 DIM AF SO 6/1	60 Hz	75 W	12 W
435271	12PAR30S/S15 3000 DIM AF SO 6/1	60 Hz	75 W	12 W
435297	12PAR30S/F25 2700 DIM AF SO 6/1	60 Hz	75 W	12 W
435305	12PAR30S/F25 3000 DIM AF SO 6/1	60 Hz	75 W	12 W
435313	12PAR30S/F25 4000 DIM AF SO 6/1	60 Hz	75 W	12 W
435321	12PAR30S/F36 2700 DIM AF SO 6/1	60 Hz	75 W	12 W
454660	12.5PAR30L/F25 2700 DIM SO	60 Hz	75 W	12.7 W
454678	12.5PAR30L/F25 3000 DIM SO	60 Hz	75 W	12.7 W
454686	12.5PAR30L/F25 4000 DIM SO	60 Hz	75 W	12.7 W
454694	12.5PAR30L/F35 2700 DIM SO	60 Hz	75 W	12.7 W
454702	12.5PAR30L/F35 3000 DIM SO	60 Hz	75 W	12.7 W
454710	12.5PAR30L/F35 4000 DIM SO	60 Hz	75 W	12.7 W
459644	12PAR30S/LED/827/F25 DIM AF SO-B 6/1	60 Hz	75 W	12 W
463729	6PAR20/LED/827/S15/DIM SO 120V 6/1	60 Hz	50 W	6 W
463646	6PAR20/LED/827/F25/DIM SO 120V 6/1	60 Hz	50 W	6 W
463653	6PAR20/LED/830/F25/DIM SO 120V 6/1	60 Hz	50 W	6 W
463661	6PAR20/LED/840/F25/DIM SO 120V 6/1	60 Hz	50 W	6 W
463679	6PAR20/LED/827/F35/DIM SO 120V 6/1	60 Hz	50 W	6 W

Order Code	Full Product Name	Input Frequency	Wattage Equivalent	Power (Rated) (Nom)
463687	6PAR20/LED/830/F35/DIM SO 120V 6/1	60 Hz	50 W	6 W
463695	6PAR20/LED/840/F35/DIM SO 120V 6/1	60 Hz	50 W	6 W
463703	6PAR20/LED/827/F25/DIM SO-B 120V 6/1	60 Hz	50 W	6 W
463711	6PAR20/LED/830/F25/DIM SO-B 120V 6/1	60 Hz	50 W	6 W
467811	12PAR30L/AMB/F25/827/DIM ULW	50 to 60 Hz	75 W	12 W
467829	12PAR30L/AMB/F25/830/DIM ULW	50 to 60 Hz	75 W	12 W
467837	12PAR30L/AMB/F25/840/DIM ULW 6/1	50 to 60 Hz	75 W	12 W
467845	12PAR30L/AMB/F40/827/DIM ULW	50 to 60 Hz	75 W	12 W
467852	12PAR30L/AMB/F40/830/DIM ULW	50 to 60 Hz	75 W	12 W
467860	12PAR30L/AMB/F40/840/DIM ULW	50 to 60 Hz	75 W	12 W
467878	12PAR30S/AMB/F25/827/DIM ULW	50 to 60 Hz	75 W	12 W
467886	12PAR30S/AMB/F25/830/DIM ULW	50 to 60 Hz	75 W	12 W
467894	12PAR30S/AMB/F25/840/DIM ULW	50 to 60 Hz	75 W	12 W
467902	12PAR30S/AMB/F40/827/DIM ULW	50 to 60 Hz	75 W	12 W
467910	12PAR30S/AMB/F40/830/DIM ULW	50 to 60 Hz	75 W	12 W
467928	12PAR30S/AMB/F40/840/DIM ULW	50 to 60 Hz	75 W	12 W

General Information

PAR30/PAR20 LED

Order Code	Full Product Name	Nominal Lifetime (Nom)	Rated Lifetime (Hours)	Switching Cycle
434928	12PAR30S/S15 3000 CW SO 6/1	50000 h	50000 h	20000X
434936	12PAR30S/S15 3000 CW SO-B 6/1	50000 h	50000 h	20000X
435263	12PAR30S/S15 2700 DIM AF SO 6/1	25000 h	25000 h	50000X
435271	12PAR30S/S15 3000 DIM AF SO 6/1	25000 h	25000 h	50000X
435297	12PAR30S/F25 2700 DIM AF SO 6/1	25000 h	25000 h	50000X
435305	12PAR30S/F25 3000 DIM AF SO 6/1	25000 h	25000 h	50000X
435313	12PAR30S/F25 4000 DIM AF SO 6/1	25000 h	25000 h	50000X
435321	12PAR30S/F36 2700 DIM AF SO 6/1	25000 h	25000 h	50000X
454660	12.5PAR30L/F25 2700 DIM SO	25000 h	25000 h	50000X
454678	12.5PAR30L/F25 3000 DIM SO	25000 h	25000 h	50000X
454686	12.5PAR30L/F25 4000 DIM SO	25000 h	25000 h	50000X
454694	12.5PAR30L/F35 2700 DIM SO	25000 h	25000 h	50000X
454702	12.5PAR30L/F35 3000 DIM SO	25000 h	25000 h	50000X
454710	12.5PAR30L/F35 4000 DIM SO	25000 h	25000 h	50000X
459644	12PAR30S/LED/827/F25 DIM AF SO-B 6/1	25000 h	25000 h	50000X
463729	6PAR20/LED/827/S15/DIM SO 120V 6/1	25000 h	25000 h	50000X
463646	6PAR20/LED/827/F25/DIM SO 120V 6/1	25000 h	25000 h	50000X
463653	6PAR20/LED/830/F25/DIM SO 120V 6/1	25000 h	25000 h	50000X
463661	6PAR20/LED/840/F25/DIM SO 120V 6/1	25000 h	25000 h	50000X
463679	6PAR20/LED/827/F35/DIM SO 120V 6/1	25000 h	25000 h	50000X

Order Code	Full Product Name	Nominal Lifetime (Nom)	Rated Lifetime (Hours)	Switching Cycle
463687	6PAR20/LED/830/F35/DIM SO 120V 6/1	25000 h	25000 h	50000X
463695	6PAR20/LED/840/F35/DIM SO 120V 6/1	25000 h	25000 h	50000X
463703	6PAR20/LED/827/F25/DIM SO-B 120V 6/1	25000 h	25000 h	50000X
463711	6PAR20/LED/830/F25/DIM SO-B 120V 6/1	25000 h	25000 h	50000X
467811	12PAR30L/AMB/F25/827/DIM ULW	25000 h	25000 h	50000X
467829	12PAR30L/AMB/F25/830/DIM ULW	25000 h	25000 h	50000X
467837	12PAR30L/AMB/F25/840/DIM ULW 6/1	25000 h	25000 h	50000X
467845	12PAR30L/AMB/F40/827/DIM ULW	25000 h	25000 h	50000X
467852	12PAR30L/AMB/F40/830/DIM ULW	25000 h	25000 h	50000X
467860	12PAR30L/AMB/F40/840/DIM ULW	25000 h	25000 h	50000X
467878	12PAR30S/AMB/F25/827/DIM ULW	25000 h	25000 h	50000X
467886	12PAR30S/AMB/F25/830/DIM ULW	25000 h	25000 h	50000X
467894	12PAR30S/AMB/F25/840/DIM ULW	25000 h	25000 h	50000X
467902	12PAR30S/AMB/F40/827/DIM ULW	25000 h	25000 h	50000X
467910	12PAR30S/AMB/F40/830/DIM ULW	25000 h	25000 h	50000X
467928	12PAR30S/AMB/F40/840/DIM ULW	25000 h	25000 h	50000X

Light Technical (1/2)

Order Code	Full Product Name	Beam Angle (Nom)	Color Code	Correlated Color Temperature (Nom)	Light Distribution	Luminous Flux (Nom)	Luminous Flux (Rated) (Nom)	Luminous Intensity (Nom)
434928	12PAR30S/S15 3000 CW SO 6/1	15 °	830	3000 K	15D	780 lm	780 lm	6300 cd
434936	12PAR30S/S15 3000 CW SO-B 6/1	15 °	830	3000 K	15D	780 lm	780 lm	6300 cd
435263	12PAR30S/S15 2700 DIM AF SO 6/1	15 °	827	2700 K	-	850 lm	850 lm	7400 cd
435271	12PAR30S/S15 3000 DIM AF SO 6/1	15 °	830	3000 K	-	900 lm	900 lm	7900 cd
435297	12PAR30S/F25 2700 DIM AF SO 6/1	25 °	827	2700 K	-	850 lm	850 lm	5000 cd
435305	12PAR30S/F25 3000 DIM AF SO 6/1	25 °	830	3000 K	-	900 lm	900 lm	5300 cd
435313	12PAR30S/F25 4000 DIM AF SO 6/1	25 °	841	4000 K	-	950 lm	950 lm	5500 cd
435321	12PAR30S/F36 2700 DIM AF SO 6/1	35 °	827	2700 K	-	850 lm	850 lm	2400 cd
454660	12.5PAR30L/F25 2700 DIM SO	25 °	827	2700 K	-	850 lm	850 lm	4700 cd
454678	12.5PAR30L/F25 3000 DIM SO	25 °	830	3000 K	-	900 lm	900 lm	5000 cd
454686	12.5PAR30L/F25 4000 DIM SO	25 °	841	4000 K	-	950 lm	950 lm	5200 cd
454694	12.5PAR30L/F35 2700 DIM SO	35 °	827	2700 K	-	850 lm	850 lm	2300 cd
454702	12.5PAR30L/F35 3000 DIM SO	35 °	830	3000 K	-	900 lm	900 lm	2400 cd

PAR30/PAR20 LED

Order Code	Full Product Name	Beam Angle (Nom)	Color Code	Correlated Color Temperature (Nom)	Light Distribution	Luminous Flux (Nom)	Luminous Flux (Rated) (Nom)	Luminous Intensity (Nom)
454710	12.5PAR30L/F35 4000 DIM SO	35 °	841	4000 K	-	950 lm	950 lm	2600 cd
459644	12PAR30S/LED/827/F25 DIM AF SO-B 6/1	25 °	827	2700 K	-	850 lm	850 lm	5000 cd
463729	6PAR20/LED/827/S15/DIM SO 120V 6/1	15 °	827	2700 K	-	480 lm	480 lm	2800 cd
463646	6PAR20/LED/827/F25/DIM SO 120V 6/1	25 °	827	2700 K	-	480 lm	480 lm	1800 cd
463653	6PAR20/LED/830/F25/DIM SO 120V 6/1	25 °	830	3000 K	-	500 lm	500 lm	1850 cd
463661	6PAR20/LED/840/F25/DIM SO 120V 6/1	25 °	841	4000 K	-	520 lm	520 lm	1900 cd
463679	6PAR20/LED/827/F35/DIM SO 120V 6/1	35 °	827	2700 K	-	480 lm	480 lm	1000 cd
463687	6PAR20/LED/830/F35/DIM SO 120V 6/1	35 °	830	3000 K	-	500 lm	500 lm	1050 cd
463695	6PAR20/LED/840/F35/DIM SO 120V 6/1	35 °	841	4000 K	-	520 lm	520 lm	1080 cd
463703	6PAR20/LED/827/F25/DIM SO-B 120V 6/1	25 °	827	2700 K	-	480 lm	480 lm	1800 cd
463711	6PAR20/LED/830/F25/DIM SO-B 120V 6/1	25 °	830	3000 K	-	500 lm	500 lm	1850 cd
467811	12PAR30L/AMB/F25/827/DIM ULW	25 °	827	2700 K	-	850 lm	850 lm	3300 cd
467829	12PAR30L/AMB/F25/830/DIM ULW	25 °	830	3000 K	-	850 lm	850 lm	3300 cd
467837	12PAR30L/AMB/F25/840/DIM ULW 6/1	25 °	841	4000 K	-	850 lm	850 lm	3300 cd
467845	12PAR30L/AMB/F40/827/DIM ULW	40 °	827	2700 K	-	850 lm	850 lm	1500 cd
467852	12PAR30L/AMB/F40/830/DIM ULW	40 °	830	3000 K	-	850 lm	850 lm	1500 cd
467860	12PAR30L/AMB/F40/840/DIM ULW	40 °	841	4000 K	-	850 lm	850 lm	1500 cd
467878	12PAR30S/AMB/F25/827/DIM ULW	25 °	827	2700 K	-	850 lm	850 lm	3300 cd
467886	12PAR30S/AMB/F25/830/DIM ULW	25 °	830	3000 K	-	850 lm	850 lm	3300 cd
467894	12PAR30S/AMB/F25/840/DIM ULW	25 °	841	4000 K	-	850 lm	850 lm	3300 cd
467902	12PAR30S/AMB/F40/827/DIM ULW	40 °	827	2700 K	-	850 lm	850 lm	1500 cd
467910	12PAR30S/AMB/F40/830/DIM ULW	40 °	830	3000 K	-	850 lm	850 lm	1500 cd
467928	12PAR30S/AMB/F40/840/DIM ULW	40 °	841	4000 K	-	850 lm	850 lm	1500 cd

Light Technical (2/2)

Order Code	Full Product Name	Rated Beam Angle	Order Code	Full Product Name	Rated Beam Angle
434928	12PAR30S/S15 3000 CW SO 6/1	15 °	463661	6PAR20/LED/840/F25/DIM SO 120V 6/1	25 °
434936	12PAR30S/S15 3000 CW SO-B 6/1	15 °	463679	6PAR20/LED/827/F35/DIM SO 120V 6/1	35 °
435263	12PAR30S/S15 2700 DIM AF SO 6/1	15 °	463687	6PAR20/LED/830/F35/DIM SO 120V 6/1	35 °
435271	12PAR30S/S15 3000 DIM AF SO 6/1	15 °	463695	6PAR20/LED/840/F35/DIM SO 120V 6/1	35 °
435297	12PAR30S/F25 2700 DIM AF SO 6/1	25 °	463703	6PAR20/LED/827/F25/DIM SO-B 120V 6/1	25 °
435305	12PAR30S/F25 3000 DIM AF SO 6/1	25 °	463711	6PAR20/LED/830/F25/DIM SO-B 120V 6/1	25 °
435313	12PAR30S/F25 4000 DIM AF SO 6/1	25 °	467811	12PAR30L/AMB/F25/827/DIM ULW	25 °
435321	12PAR30S/F36 2700 DIM AF SO 6/1	35 °	467829	12PAR30L/AMB/F25/830/DIM ULW	25 °
454660	12.5PAR30L/F25 2700 DIM SO	25 °	467837	12PAR30L/AMB/F25/840/DIM ULW 6/1	25 °
454678	12.5PAR30L/F25 3000 DIM SO	25 °	467845	12PAR30L/AMB/F40/827/DIM ULW	40 °
454686	12.5PAR30L/F25 4000 DIM SO	25 °	467852	12PAR30L/AMB/F40/830/DIM ULW	40 °
454694	12.5PAR30L/F35 2700 DIM SO	35 °	467860	12PAR30L/AMB/F40/840/DIM ULW	40 °
454702	12.5PAR30L/F35 3000 DIM SO	35 °	467878	12PAR30S/AMB/F25/827/DIM ULW	25 °
454710	12.5PAR30L/F35 4000 DIM SO	35 °	467886	12PAR30S/AMB/F25/830/DIM ULW	25 °
459644	12PAR30S/LED/827/F25 DIM AF SO-B 6/1	25 °	467894	12PAR30S/AMB/F25/840/DIM ULW	25 °
463729	6PAR20/LED/827/S15/DIM SO 120V 6/1	15 °	467902	12PAR30S/AMB/F40/827/DIM ULW	40 °
463646	6PAR20/LED/827/F25/DIM SO 120V 6/1	25 °	467910	12PAR30S/AMB/F40/830/DIM ULW	40 °
463653	6PAR20/LED/830/F25/DIM SO 120V 6/1	25 °	467928	12PAR30S/AMB/F40/840/DIM ULW	40 °

Mechanical and Housing

Order Code	Full Product Name	Bulb Shape	Order Code	Full Product Name	Bulb Shape
434928	12PAR30S/S15 3000 CW SO 6/1	PAR30S	434936	12PAR30S/S15 3000 CW SO-B 6/1	PAR30S

PAR30/PAR20 LED

Order Code	Full Product Name	Bulb Shape
435263	12PAR30S/S15 2700 DIM AF SO 6/1	PAR30S
435271	12PAR30S/S15 3000 DIM AF SO 6/1	PAR30S
435297	12PAR30S/F25 2700 DIM AF SO 6/1	PAR30S
435305	12PAR30S/F25 3000 DIM AF SO 6/1	PAR30S
435313	12PAR30S/F25 4000 DIM AF SO 6/1	PAR30S
435321	12PAR30S/F36 2700 DIM AF SO 6/1	PAR30S
454660	12.5PAR30L/F25 2700 DIM SO	PAR30L
454678	12.5PAR30L/F25 3000 DIM SO	PAR30L
454686	12.5PAR30L/F25 4000 DIM SO	PAR30L
454694	12.5PAR30L/F35 2700 DIM SO	PAR30L
454702	12.5PAR30L/F35 3000 DIM SO	PAR30L
454710	12.5PAR30L/F35 4000 DIM SO	PAR30L
459644	12PAR30S/LED/827/F25 DIM AF SO-B 6/1	PAR30S
463729	6PAR20/LED/827/S15/DIM SO 120V 6/1	PAR20
463646	6PAR20/LED/827/F25/DIM SO 120V 6/1	PAR20
463653	6PAR20/LED/830/F25/DIM SO 120V 6/1	PAR20
463661	6PAR20/LED/840/F25/DIM SO 120V 6/1	PAR20




Order Code	Full Product Name	Bulb Shape
463679	6PAR20/LED/827/F35/DIM SO 120V 6/1	PAR20
463687	6PAR20/LED/830/F35/DIM SO 120V 6/1	PAR20
463695	6PAR20/LED/840/F35/DIM SO 120V 6/1	PAR20
463703	6PAR20/LED/827/F25/DIM SO-B 120V 6/1	PAR20
463711	6PAR20/LED/830/F25/DIM SO-B 120V 6/1	PAR20
467811	12PAR30L/AMB/F25/827/DIM ULW	PAR30L
467829	12PAR30L/AMB/F25/830/DIM ULW	PAR30L
467837	12PAR30L/AMB/F25/840/DIM ULW 6/1	PAR30L
467845	12PAR30L/AMB/F40/827/DIM ULW	PAR30L
467852	12PAR30L/AMB/F40/830/DIM ULW	PAR30L
467860	12PAR30L/AMB/F40/840/DIM ULW	PAR30L
467878	12PAR30S/AMB/F25/827/DIM ULW	PAR30S
467886	12PAR30S/AMB/F25/830/DIM ULW	PAR30S
467894	12PAR30S/AMB/F25/840/DIM ULW	PAR30S
467902	12PAR30S/AMB/F40/827/DIM ULW	PAR30S
467910	12PAR30S/AMB/F40/830/DIM ULW	PAR30S
467928	12PAR30S/AMB/F40/840/DIM ULW	PAR30S

Temperature









Order Code	Full Product Name	T-Case Maximum (Nom)
434928	12PAR30S/S15 3000 CW SO 6/1	-
434936	12PAR30S/S15 3000 CW SO-B 6/1	-
435263	12PAR30S/S15 2700 DIM AF SO 6/1	89 °C
435271	12PAR30S/S15 3000 DIM AF SO 6/1	89 °C
435297	12PAR30S/F25 2700 DIM AF SO 6/1	89 °C
435305	12PAR30S/F25 3000 DIM AF SO 6/1	89 °C
435313	12PAR30S/F25 4000 DIM AF SO 6/1	89 °C
435321	12PAR30S/F36 2700 DIM AF SO 6/1	89 °C
454660	12.5PAR30L/F25 2700 DIM SO	89 °C
454678	12.5PAR30L/F25 3000 DIM SO	89 °C
454686	12.5PAR30L/F25 4000 DIM SO	89 °C
454694	12.5PAR30L/F35 2700 DIM SO	89 °C
454702	12.5PAR30L/F35 3000 DIM SO	89 °C
454710	12.5PAR30L/F35 4000 DIM SO	89 °C
459644	12PAR30S/LED/827/F25 DIM AF SO-B 6/1	89 °C
463729	6PAR20/LED/827/S15/DIM SO 120V 6/1	85 °C
463646	6PAR20/LED/827/F25/DIM SO 120V 6/1	85 °C
463653	6PAR20/LED/830/F25/DIM SO 120V 6/1	85 °C

Order Code	Full Product Name	T-Case Maximum (Nom)
463661	6PAR20/LED/840/F25/DIM SO 120V 6/1	85 °C
463679	6PAR20/LED/827/F35/DIM SO 120V 6/1	85 °C
463687	6PAR20/LED/830/F35/DIM SO 120V 6/1	85 °C
463695	6PAR20/LED/840/F35/DIM SO 120V 6/1	85 °C
463703	6PAR20/LED/827/F25/DIM SO-B 120V 6/1	85 °C
463711	6PAR20/LED/830/F25/DIM SO-B 120V 6/1	85 °C
467811	12PAR30L/AMB/F25/827/DIM ULW	85 °C
467829	12PAR30L/AMB/F25/830/DIM ULW	85 °C
467837	12PAR30L/AMB/F25/840/DIM ULW 6/1	85 °C
467845	12PAR30L/AMB/F40/827/DIM ULW	85 °C
467852	12PAR30L/AMB/F40/830/DIM ULW	85 °C
467860	12PAR30L/AMB/F40/840/DIM ULW	85 °C
467878	12PAR30S/AMB/F25/827/DIM ULW	85 °C
467886	12PAR30S/AMB/F25/830/DIM ULW	85 °C
467894	12PAR30S/AMB/F25/840/DIM ULW	85 °C
467902	12PAR30S/AMB/F40/827/DIM ULW	85 °C
467910	12PAR30S/AMB/F40/830/DIM ULW	85 °C
467928	12PAR30S/AMB/F40/840/DIM ULW	85 °C













Light Distribution Diagrams













12.5 W E26 3000 K PAR30S 15D















Light Distribution Diagrams




Light Distribution Diagrams












Accent Diagrams






Accent Diagrams

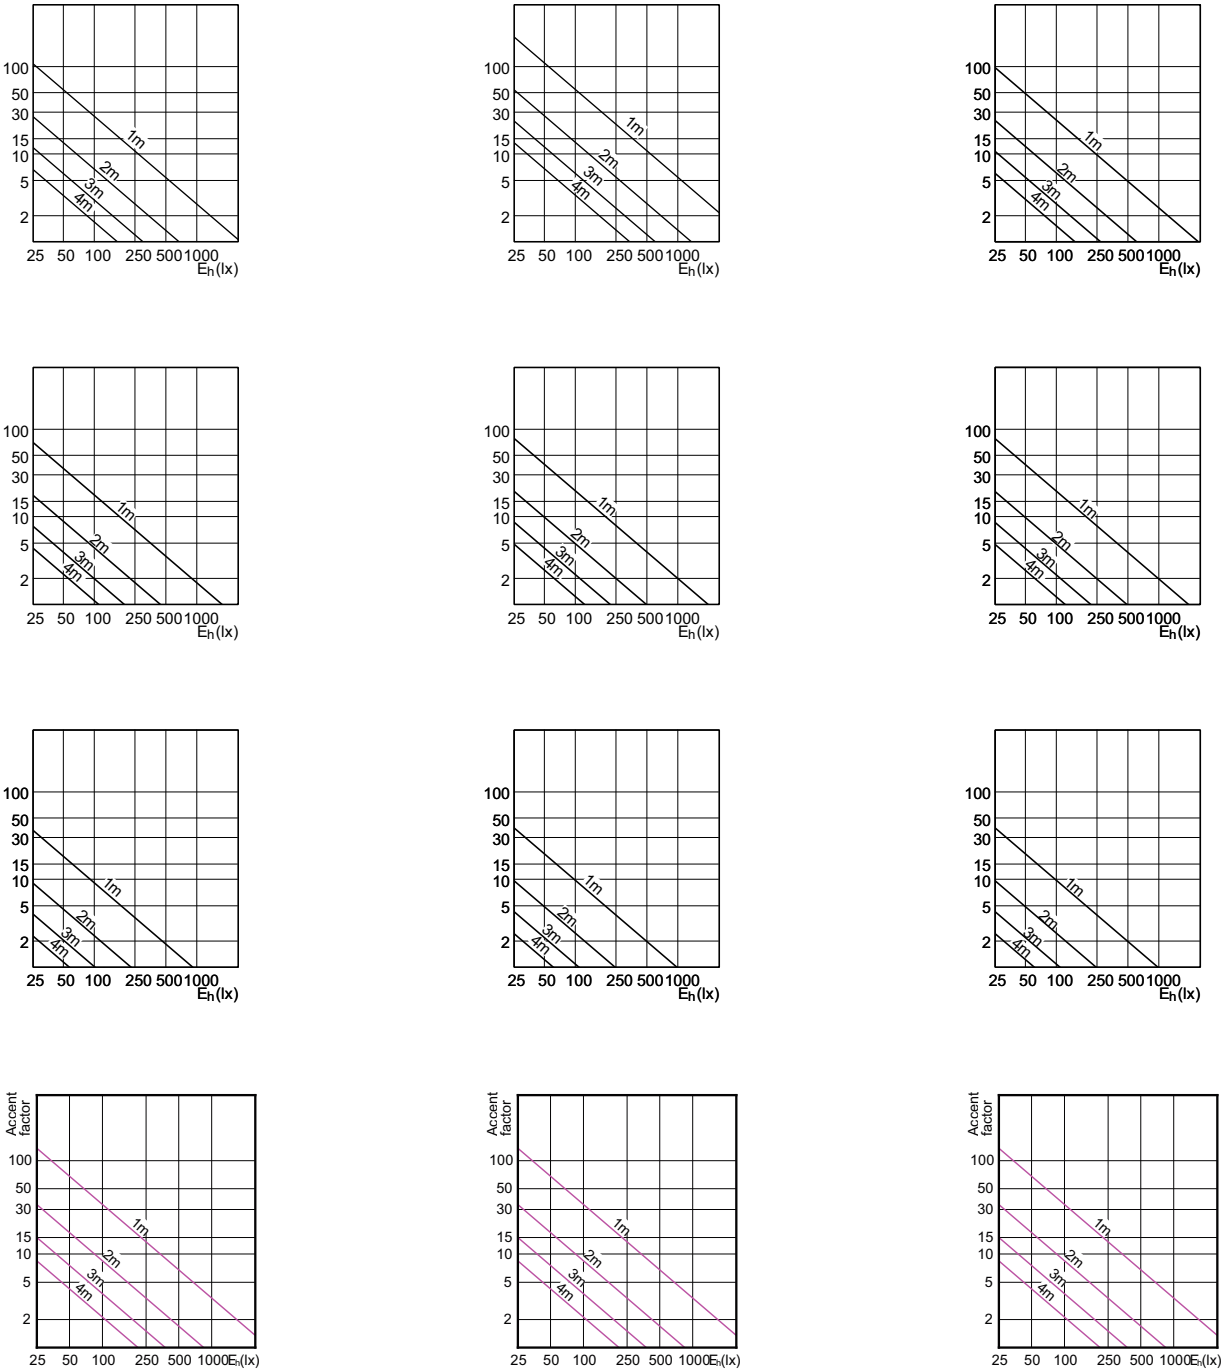













Accent Diagrams















Beam Diagrams

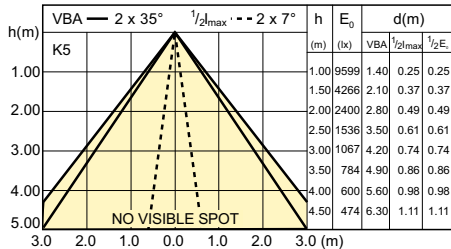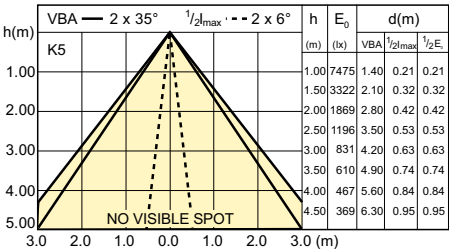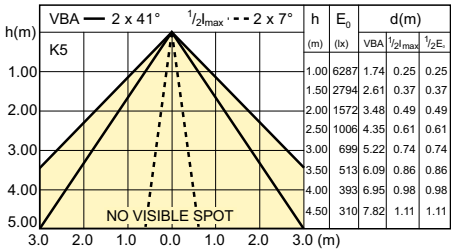

Beam Diagrams

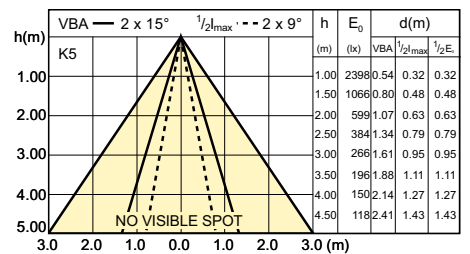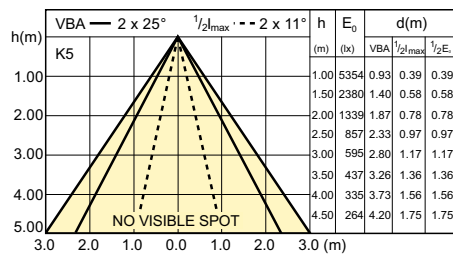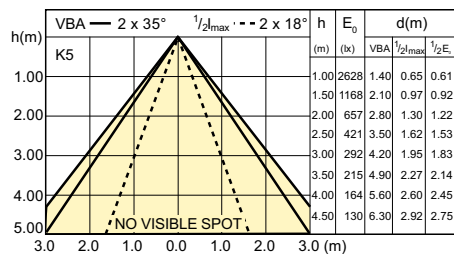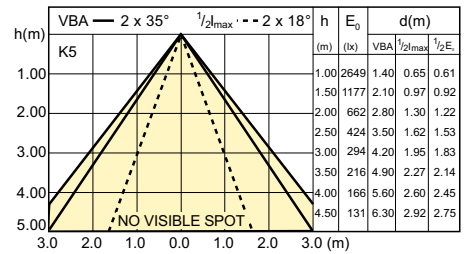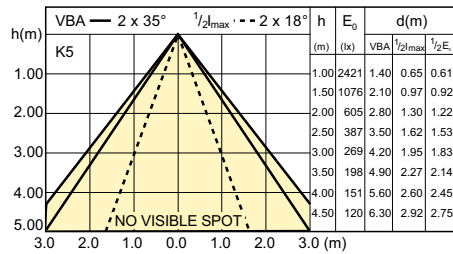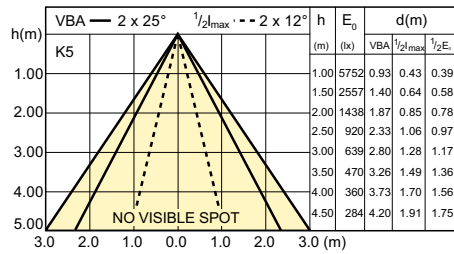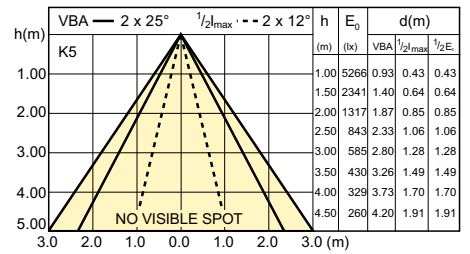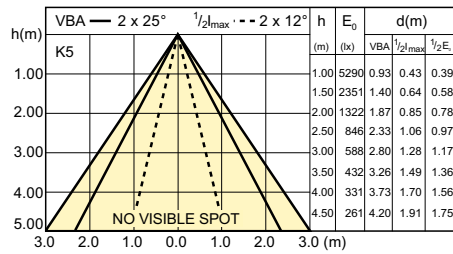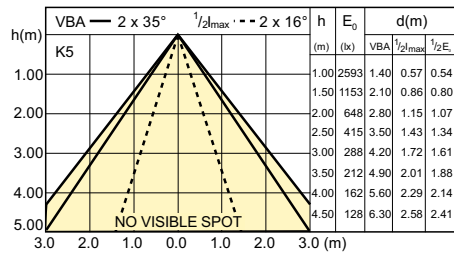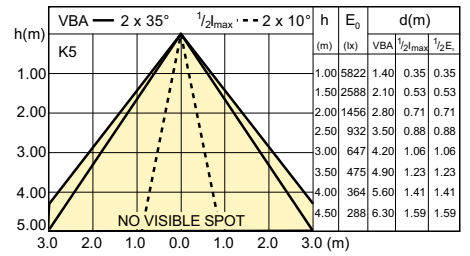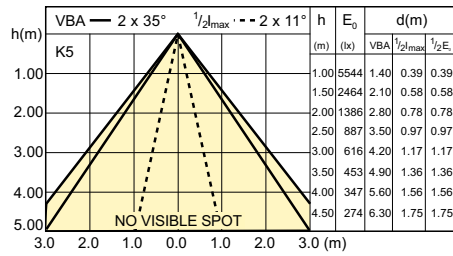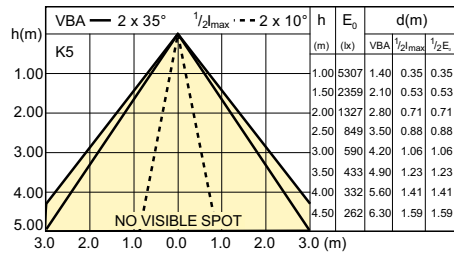

Beam Diagrams

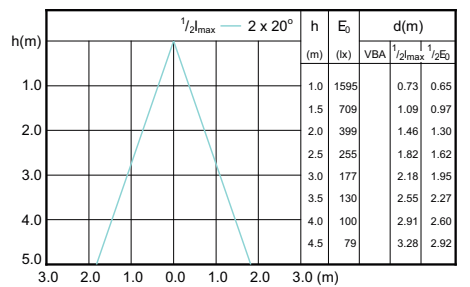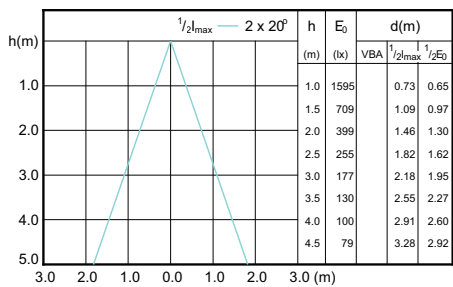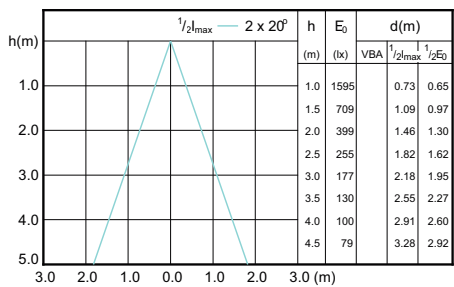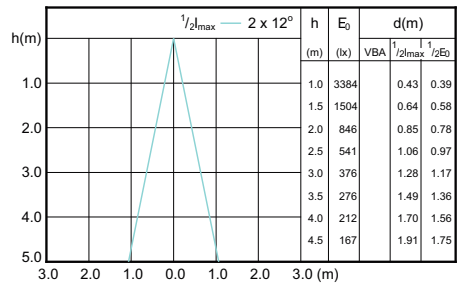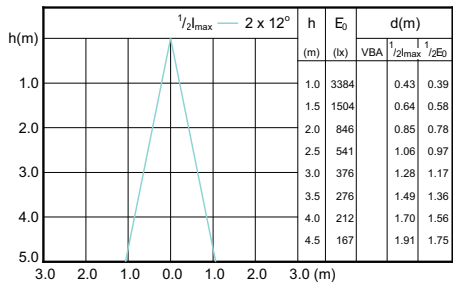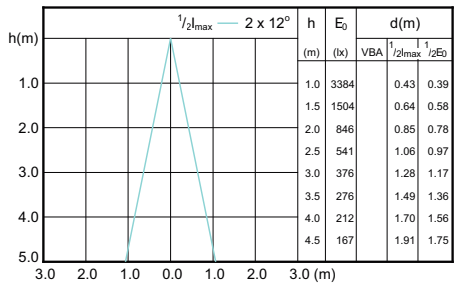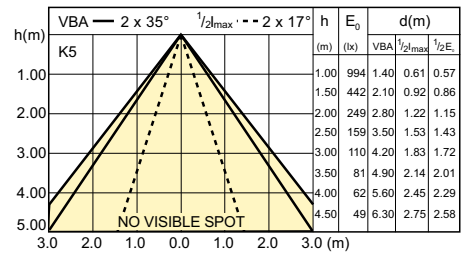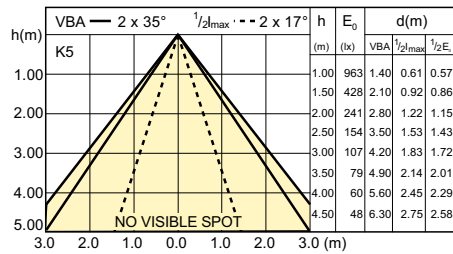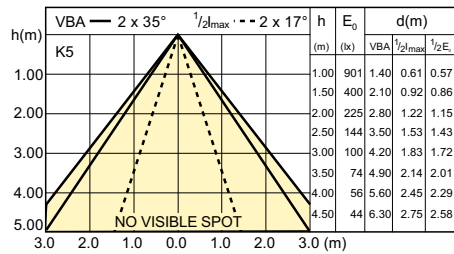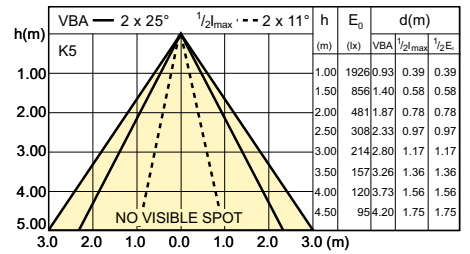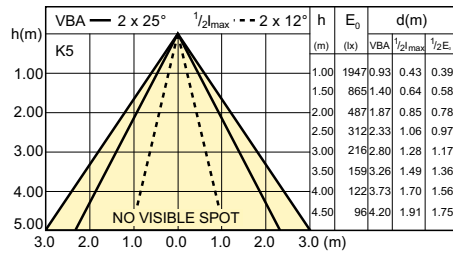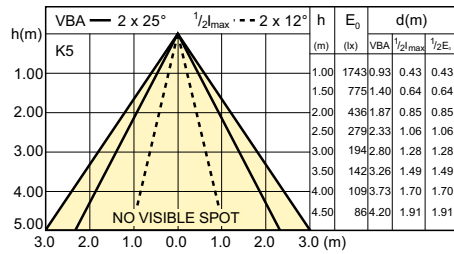

Beam Diagrams

