


FLUORESCENT LAMPHOLDERS MEDIUM BI-PIN G13 FOR T-8/T-12 LAMPS

FL005 Series - Low Profile Turn Type Lampholders




D9

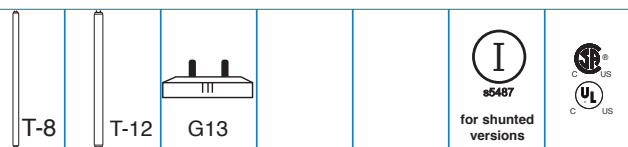

- White polycarbonate body, rated 110°C
- Turn lock type, low profile
- Quick connect push-in wire terminals for 18 AWG solid wire $\frac{5}{16}$ "
- For a 0.023" - 0.040" (0.6 mm - 1.0 mm) panel thickness
- Two wire ports per terminal for easy harness wiring

- Available shunted for use with instant start electronic ballasts; saves time and makes wiring easier
- Rated 660W, 600V, suitable for all new HO lamps
- Many models to choose from
- cCSA_{US} Certified / cUL_{US} Listed
- Circle I s5487 Pending for shunted version(s)

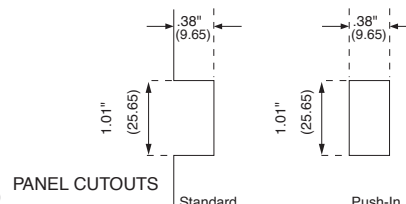

Solid Shoulder, Standard Profile 	FL005*	Low Profile with Captive Nut and Screw Assembled 	FL005-A*
Solid Shoulder, with Captive Nut, no Screw 	FL005-C*Δ	Low Profile with Captive Nut Installed, Screw Packed Separately 	FL005-U*Δ
Flexible Snap-In Shoulder 	FL005-W*	Flexible Snap-In Shoulder, Captive Nut 	FL005-WC*Δ
Snap-In Shoulder, With Locating Nib 	FL005-WN	Snap-In Shoulder, w/ Locating Nib, Externally Shunted 	FL005-WEN
Snap-In Shoulder, w/ Locating Nib, Externally Shunted 	FL005-WPS	Disconnect version 	FL005-D

Δ Add "-C" after product code for captive nut on models with nut slot