


Fa8 BASE HIGH OUTPUT /
R17d BASE DOUBLE RECESSED CONTACTS

FL315-W Plunger End Slimline Lampholder



E3

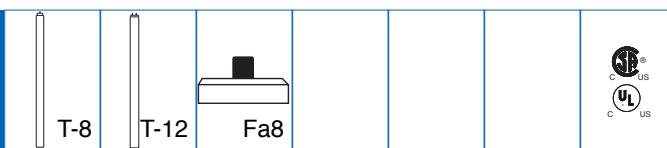


- Made from white polycarbonate
- For T6, T8 or T12 lamps
- Used in residential, commercial and industrial applications, and in outdoor enclosed signs
- Add "C" for captive nut

- Quick connect push-in wire terminals accept 18 AWG, solid or solder dipped leads, stripped $\frac{3}{8}$ "
- Recessed wire wells completely enclose wires

- Designed for snap-in or slide-in mounting
- Plunger lampholders have non-sticking feature, loaded to hold lamp securely
- Rated 1,000W, 600V Spring End
- cCSA_{us} Certified / cUL_{us} Listed

FL315-WB Plunger End, No Front Shelf
FL315-WSB Notched Right Shoulder version

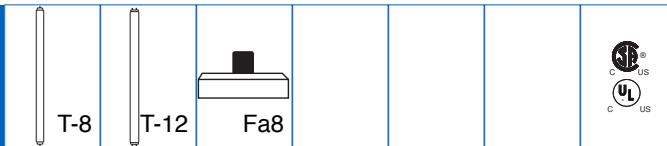

HO Fluorescent



- Made from white polycarbonate
- For T6, T8 or T12 lamps
- "WSB" version has notched right snap-in shoulder
- Used in residential, commercial and industrial applications, and

- in outdoor enclosed signs
- Quick connect push-in wire terminals accept 18 AWG, solid or solder dipped leads, stripped $\frac{3}{8}$ "
- Recessed wire wells completely enclose wires


- Designed for snap-in or slide-in mounting
- Plunger lampholders have non-sticking feature, loaded to hold lamp securely
- Rated 1,000W, 600V Spring End
- cCSA_{us} Certified / cUL_{us} Listed

FL540-W Butt on, plunger end, wire leads, for 800 and 1500mA lamps



- Body made from PC material
- Silver plated Phosphor Bronze contacts
- Plunger end of set, both are required
- 9" 18AWG TEW AWN 105°C wire leads, stripped 1/2" or per customer specifications

- Neoprene "O" ring gasket
- Mounts using (2) 6/32" screws into socket

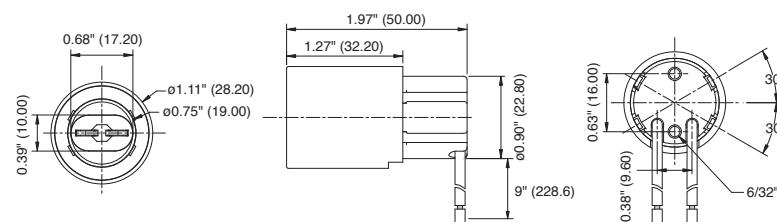

- Rated 600V 660W or 1000V 660W for non-home use
- Certified for outdoor use in enclosed fixtures
- cCSA_{us} and cUL_{us} listed