
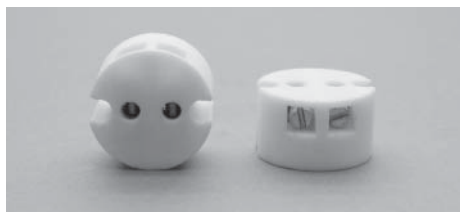



F4


B34 GX5.3 Base Lampholder Screw Mount



- Round Steatite body
- Has screw terminals which allows assembly after wires have been routed through fixture


- Lamps are held in place using screws on lamp pins for most secure lamp retention

- Mounts using 2 holes through socket
- Rated 8A 24V

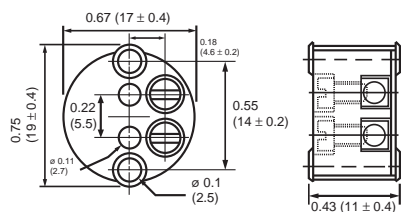

Bi-Pin Lamps


IS126R (F53) GX5.3 Base Floating Lampholder With Reflector






- Rectangular porcelain body
- Copper, nickel-plated double wipe contacts with stainless steel reinforcing springs
- Standard lead wires are 18 AWG SEW-1 (SF1) 200°C, 12" long, stripped 1/4"
- Wire exit on side of the socket

- Floating socket design attaches to fixed position lamp
- Other wire and terminations are available upon request, contact the factory
- Aluminum reflector to push heat and light forward

- Rated 8A 24V
- UL Listed
- CSA Certified

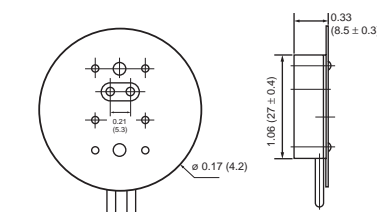

F55 GX5.3 Base Lampholder With 1 1/4" IPS Hickey

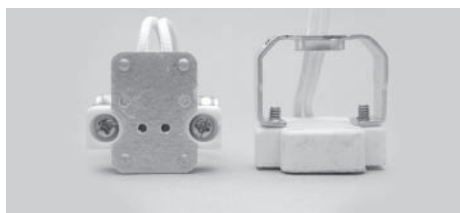

- Rectangular Steatite body with ears
- Copper, nickel-plated double wipe contacts with stainless steel reinforcing springs
- Standard lead wires are 18 AWG SEW-1 (SF1) 200°C, 12" long, stripped 1/4"

- Has 1/4" IPS threaded hickey to secure to pipe threads, which allows for greater design flexibility

- Rated 8A 24V
- UL Listed
- CSA Certified

