


FLUORESCENT LAMPHOLDERS MEDIUM BI-PIN G13 FOR T-8/T-12 LAMPS

D16

FL010 Series

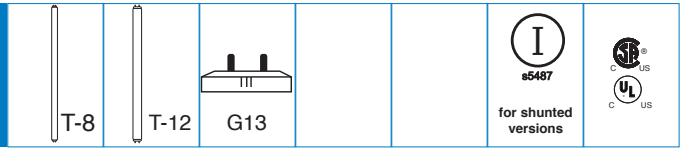

- White polycarbonate body, rated 110°C
- Straight-in and "U" lamp applications, self aligning for "U" shaped lamps
- Quick connect push-in wire terminals for 18 AWG solid wire .16"
- For 0.23" - 0.040" (0.6 mm - 1.0 mm) panel thickness
- Many models to choose from
- Available shunted for use with instant electronic ballasts; saves time and makes wiring easier
- Two wire ports per terminal for easy harness wiring; double edge contacts
- Rated 660W, 600V, suitable for all new HO lamps
- cCSA_{US} Certified / cUL_{US} Listed
- Circle I s5487 Pending for shunted version(s)

