











MEDIUM BASE

MEDIUM BASE HID 4KV PULSE RATED LAMPHOLDERS

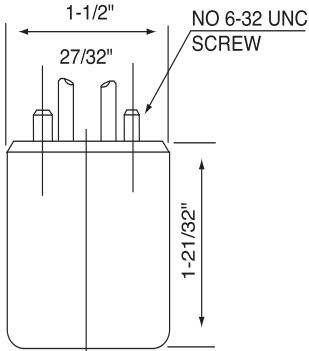

IS267S-1 Medium Base 4KV Pulse Rated Lampholder with 6/32" Mounting Screws

  E - 26	1" BASE DIAMETER	<ul style="list-style-type: none">- White glazed porcelain body- Copper alloy nickel-plated screw shell- Copper alloy nickel-plated centre contact- Standard leads are 18 AWG, SEW-2 (SF2) 600V 200°C, 12" long, or specify desired wire and length	<ul style="list-style-type: none">- Supplied with insulating fibre- Supplied with two #6-32 mounting screws on 27/32" centres- Die cast caps are available- 660W, 600V- UL Listed
  			

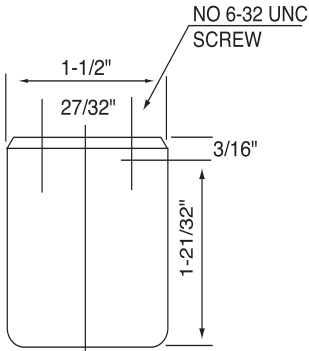IS267S-2 Medium Base 4KV Pulse Rated Lampholder with 6/32" Female Bushings

  E - 26	1" BASE DIAMETER	<ul style="list-style-type: none">- White glazed porcelain body- Copper alloy nickel-plated screw shell- Copper alloy nickel-plated centre contact- With screw terminals- Supplied with insulating fibre	<ul style="list-style-type: none">- Supplied with two captive #6-32 threaded bushings on 27/32" centres- Die cast caps are available- 660W, 600V- UL Listed
  			

IS267-EP-1 4KV Pulse Rated-Medium Base with Mounting Screws

  E - 26	1" BASE DIAMETER	<ul style="list-style-type: none">- For use in applications with the GE MXR 32W Metal Halide lamp.- Copper alloy nickel-plated screw shell. Leaf spring supported nickel plated center contact.- White glazed porcelain body.- Special extended body design to conform with UL requirements for the live screwshell	<ul style="list-style-type: none">- Standard leads are 18 gauge SF-200C leads 12" long- Available with lamp grip screwshell.- Available with screwshell reinforcing washers- 660W, 600V- cULus
