


# Halogen Lampholders


## FOR BI-PIN QUARTZ LAMPS

F4

### B34 GX5.3 Base Lampholder Screw Mount





Bi-Pin Lamps

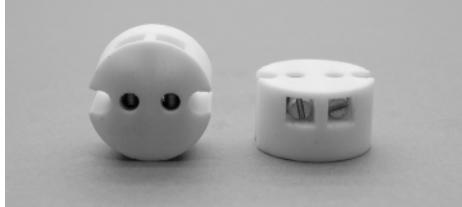

- Round Steatite body
- Has screw terminals which allows assembly after wires have been routed through fixture

- Lamps are held in place using screws on lamp pins for most secure lamp retention





- Mounts using 2 holes through socket
- Rated 8A 24V

### IS126R (F53) GX5.3 Base Floating Lampholder With Reflector



- Rectangular porcelain body
- Copper, nickel-plated double wipe contacts with stainless steel reinforcing springs
- Standard lead wires are 18 AWG SEW-1 (SF1) 200°C, 12" long, stripped  $\frac{1}{4}$ "
- Wire exit on side of the socket

- Floating socket design attaches to fixed position lamp
- Other wire and terminations are available upon request, contact the factory
- Aluminum reflector to push heat and light forward





- Rated 8A 24V
- UL Listed
- CSA Certified

### F55 GX5.3 Base Lampholder With $1\frac{1}{4}$ " IPS Hickey



- Rectangular Steatite body with ears
- Copper, nickel-plated double wipe contacts with stainless steel reinforcing springs
- Standard lead wires are 18 AWG SEW-1 (SF1) 200°C, 12" long, stripped  $\frac{1}{4}$ "

- Has  $\frac{1}{4}$ " IPS threaded hickey to secure to pipe threads, which allows for greater design flexibility



- Rated 8A 24V
- UL Listed
- CSA Certified