


HOLE SAWS

Bi-Metal Hole Saws

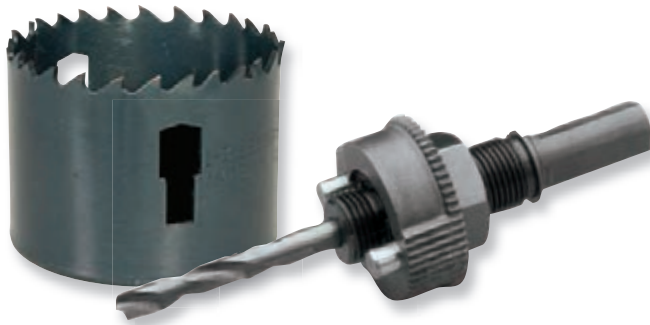

- Cut through steel, tin, aluminum, fiberglass, wood and plastic.
- Deep 1-5/8" (41.3 mm) cutting depth allows for cutting through 2" x 4" wood studs.
- Extra-tough bi-metal blade – we use the highest grade of tool steel to outlast competitor's blades. That beats premature saw replacement and saves you money.
- Steam oxide finish – no paint to gum up and slow cutting. The saw runs cooler for longer life and better performance.
- Extra-thick backplate minimizes vibration for smoother, easier, less tiring cutting.
- Made in USA

CAT. NO.	UPC NO.						USE WITH QUICK CHANGE			
825-5/8	19132	5/8	15.9		Pg-9	1/4"	02800*	37157, 37155, or 38522	.1 46	
825-3/4	19134	3/4	19.0		Pg-11	1/2"			.1 46	
825-13/16	19135	13/16	20.6		Pg-13 ISO-20	1/2"			.1 46	
825-7/8	19136	7/8	22.2	1/2"	Pg-16	5/8"			.1 46	
825-1	19138	1	25.4			ISO-25			3/4"	.1 46
825-1-1/8	19141	1-1/8	28.6	3/4"	Pg-21	3/4"			.1 46	
825-1-3/16	19143	1-3/16	30.2						.2 91	
825-1-1/4	19144	1-1/4	31.7			1"			.2 91	
825-1-5/16	19145	1-5/16	33.3			ISO-32			.2 91	
825-1-3/8	19146	1-3/8	35.0	1"					.1 46	
825-1-7/16	19147	1-7/16	36.5		Pg-29		.2 91			
825-1-1/2	19148	1-1/2	38.1			1-1/4"	.2 91			
825-1-5/8	19150	1-5/8	41.3			ISO-40	.2 91			
825-1-3/4	19152	1-3/4	44.4	1-1/4"		1-1/2"	.2 91			
825-1-7/8	19154	1-7/8	47.6		Pg-36		.3 137			
825-2	19155	2	50.8	1-1/2"		ISO-50	.2 91			
825-2-1/8	19158	2-1/8	54.0		Pg-42		.3 137			
825-2-1/4	19159	2-1/4	57.2			2"	.3 137			
825-2-3/8	19161	2-3/8	60.3		Pg-48	2"	.3 137			
825-2-1/2	19162	2-1/2	63.5	2"		ISO-63	2"			
825-2-5/8	19164	2-5/8	66.7				.4 182			
825-2-3/4	19165	2-3/4	69.8				.4 182			
825-2-7/8	19166	2-7/8	73.0				.4 182			
825-3	19167	3	76.2	2-1/2"		2-1/2"	.5 227			
825-3-1/8	19168	3-1/8	79.4				.5 227			
825-3-1/4	19169	3-1/4	82.5				.6 273			
825-3-1/2	19171	3-1/2	88.9				.6 273			
825-3-5/8	19172	3-5/8	92.1	3"			.6 273			
825-3-3/4	19174	3-3/4	95.2				.7 318			
825-4	19176	4	101.6				.7 318			
825-4-1/8	19177	4-1/8	104.8	3-1/2"		3-1/2"	.8 363			
825-4-1/4	19178	4-1/4	108.0			4"	.8 363			
825-4-3/8	19179	4-3/8	111.1				.8 363			
825-4-1/2	19180	4-1/2	114.3	4"			9 409			
825-4-3/4	19181	4-3/4	120.6				1.1 499			
825-5	19182	5	127.0				1.2 545			
825-5-1/2	19183	5-1/2	139.7			5"	1.2 545			
825-6	19184	6	152.4				1.4 636			
825-68	36169	68	68.0				.4 182			
825-74	36170	74	70.0				.5 227			

*See page 207 for Quick Change adapter information.