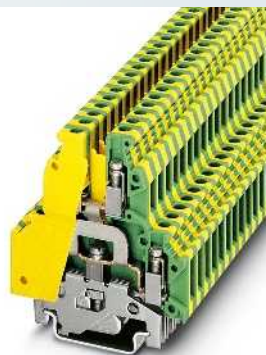

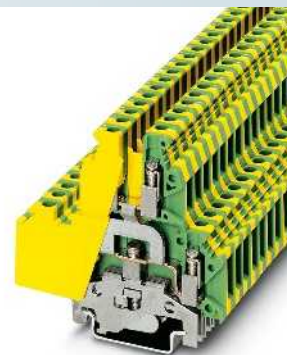



Double-level ground terminals UKK 5-PE and UKKB 5-PE

- Same shape and pitch as the feed-through terminal blocks
- Even if fully wired, the level offset offers unobstructed access to the lower connection level
- Universal ground conductor foot for mounting on NS 35...- or NS 32... DIN rails (with the exception of NS 35/15–2,3)

4 (4) mm², double-level ground terminal4 (4) mm², double-level ground terminal

Technical data				
Dimensions	Width	Length	Height NS 35/7,5	
	6.2	56	62	
Dimensions	Width	Length	Height NS 32	
	6.2	56	67	
Max. electrical data			Max. Ø [mm ²]	AWG (UL)
			0.2 - 4	26-10
Rated data	IEC 60947-7-2	UL	CSA	IEC/ EN 60079-7
Rated voltage	-	-	-	-
Nominal current / cross section	-	-	-	-
Rated cross section	4	-	-	-
Cross section range	24 - 12	26-10	28-10	-
Connection capacity	Solid	Stranded	Ferrule without/with plastic sleeve	
1 conductor	0.2 - 4	0.2 - 4	0.25 - 4	0.25 - 2.5
2 conductors (of the same type)	0.2 - 1.5	0.2 - 1.5	0.25 - 1.5	-
2 stranded conductors with a TWIN ferrule	-	-	-	0.5 - 1.5
General data				
Stripping length	8			
Screw thread	M3			
Tightening torque	0.6 - 0.8			
Insulating material	PA			
Inflammability class according to UL 94	V2			

Ordering data		
Type	Order No.	Pcs. / Pkt.
UKK 5-PE	2774211	50

Accessories		
SF-SL 0,6X3,5-100 S-VDE	1212587	10
ZB 6 (see Catalog 5)		

Dimensions	
	[mm]
Dimensions	
	[mm]
Max. electrical data	
Rated data	
Rated voltage	[V]
Nominal current / cross section	[A] / [mm ²]
Rated cross section	[mm ²]
Cross section range	AWG
Connection capacity	
1 conductor	[mm ²]
2 conductors (of the same type)	[mm ²]
2 stranded conductors with a TWIN ferrule	[mm ²]
General data	
Stripping length	[mm]
Screw thread	
Tightening torque	[Nm]
Insulating material	
Inflammability class according to UL 94	

Description	Color
Ground terminal, for mounting on NS 32... or NS 35...	green-yellow

Screwdriver
Lateral groove marking



Technical data				
Dimensions	Width	Length	Height NS 35/7,5	
	6.2	67	62	
Dimensions	Width	Length	Height NS 32	
	6.2	67	67	
Max. electrical data			Max. Ø [mm ²]	AWG (UL)
			0.2 - 4	26-10
Rated data	IEC 60947-7-2	UL	CSA	IEC/ EN 60079-7
Rated voltage	-	-	-	-
Nominal current / cross section	-	-	-	-
Rated cross section	4	-	-	-
Cross section range	24 - 12	26-10	28-10	-
Connection capacity	Solid	Stranded	Ferrule without/with plastic sleeve	
1 conductor	0.2 - 4	0.2 - 4	0.25 - 4	0.25 - 2.5
2 conductors (of the same type)	0.2 - 1.5	0.2 - 1.5	0.25 - 1.5	-
2 stranded conductors with a TWIN ferrule	-	-	-	0.5 - 1.5
General data				
Stripping length	8			
Screw thread	M3			
Tightening torque	0.6 - 0.8			
Insulating material	PA			
Inflammability class according to UL 94	V2			

Ordering data		
Type	Order No.	Pcs. / Pkt.
UKKB 5-PE	3007123	50

Accessories		
SF-SL 0,6X3,5-100 S-VDE	1212587	10
ZB 6 (see Catalog 5)		