



32 outputs, NPN-wired




2 outputs, 2 A



8 outputs, 2 A

UL US ABS
Ex: Ex

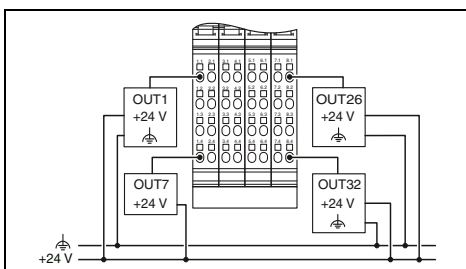

Technical data

Inline data jumper

24 V DC (via voltage jumper)

19.2 V DC ... 30 V DC (including all tolerances, including ripple)

Max. 140 mA

1-wire

32

500 mA

Overload protection, short-circuit protection of outputs

Spring-cage connection

0.08 ... 1.5 mm² / 0.08 ... 1.5 mm² / 28 - 16


135 g

48.8 mm / 119.8 mm / 71.5 mm

-25 °C ... 55 °C

Class A product, see page 527

UL US EAC
Ex: Ex

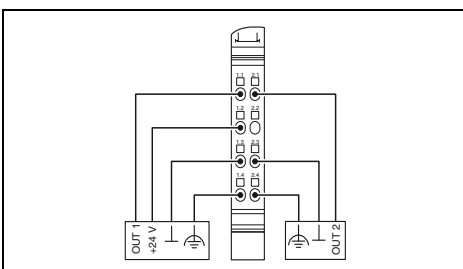

Technical data

Inline data jumper

24 V DC (via voltage jumper)

19.2 V DC ... 30 V DC (including all tolerances, including ripple)

Max. 35 mA

2, 3, 4-wire

2

2 A

Overload protection, short-circuit protection of outputs

Spring-cage connection

0.08 ... 1.5 mm² / 0.08 ... 1.5 mm² / 28 - 16


61 g

12.2 mm / 119.8 mm / 71.5 mm

-25 °C ... 55 °C

Class A product, see page 527

UL US EAC

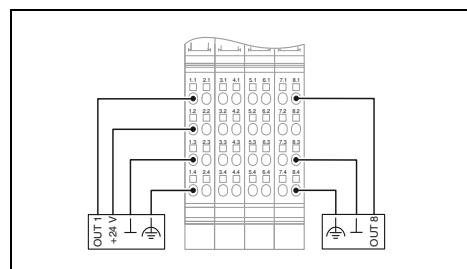

Technical data

Inline data jumper

24 V DC (via voltage jumper)

19.2 V DC ... 30 V DC (including all tolerances, including ripple)

Max. 60 mA

2, 3, 4-wire

8

2 A

Overload protection, short-circuit protection of outputs

Spring-cage connection

0.08 ... 1.5 mm² / 0.08 ... 1.5 mm² / 28 - 16

130 g

48.8 mm / 119.8 mm / 71.5 mm

-25 °C ... 55 °C

Class A product, see page 527

Ordering data

Type	Order No.	Pcs. / Pkt.
IB IL 24 DO 32/HD-NPN-PAC	2878340	1

Accessories

IB IL DI/DO 8-PLSET	2860950	1
---------------------	---------	---

Ordering data

Type	Order No.	Pcs. / Pkt.
IB IL 24 DO 2-2A-PAC	2861263	1
IB IL 24 DO 2-2A-XC-PAC	2702133	1

Accessories

IB IL SCN-8-CP	2727608	10
----------------	---------	----

Ordering data

Type	Order No.	Pcs. / Pkt.
IB IL 24 DO 8-2A-PAC	2861603	1

Accessories

IB IL DI/DO 8-PLSET/CP	2860963	1
------------------------	---------	---