

# ILSCO Oxide Inhibitor

RoHS  
Compliant




## TYPE DE-OX®

### Features

- Provides air-tight seal around conductor
- Available in a variety of packages
- Broad working temperature range
- Conductor versatile

### Benefits

- Prevents oxides from forming
- Provides convenience of selecting the right size for the job
- May be used from -30° F to 200° F
- May be used on copper or aluminum conductors

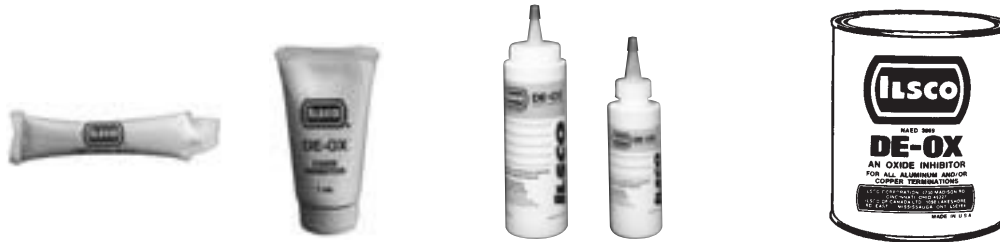

Catalog Number	Container Size & Type	Packaging
DE-OX -5CC	5cc Packet	Display Carton of 150
DE-OX-5CC-B4	5cc Packet	4 Per Bag, 25 Bags Per Carton
DE-OX-1OZ	1 oz. Tube	Display Carton of 50
DE-OX -4OZ	4 oz. Bottle	Display Carton of 12
DE-OX-8OZ	8 oz. Bottle	Display Carton of 12
DE-OX-1GAL	1 Gallon Can	1 Can
DE-OX -5GAL	5 Gallon Bucket	1 Bucket
UDE-OX-V-4OZ*+	4 oz. Bottle	Display Carton of 12
UDE-OX-V-8OZ*+	8 oz. Bottle	Display Carton of 12

\* V denotes synthetic base, chalk color, doesn't stain blankets, etc.

+ Not UL Listed  
UL File E312012

