

MT / MQ / MQM Series Remote fixtures

micro tungsten lamps, micro-quartz lamps
or MR16 lamps



Features

- Compact design
- 6, 12 and 24 volts with various wattages
- Variable light patterns using adjustable lens
- Fire-retardant thermoplastic
- Available with tungsten, quartz lamps or MR16
- 300° rotation
- CSA certified to C22.2 N°50.



Typical Specification

Lamp head and stem shall be injection molded, impact resistant, flame retardant thermoplastic and shall require no tool for aiming or adjustment. The lens shall be inverse concave design and fully adjustable for aisle or area distribution during installation without the need to energize the lamp. Visual identification of distribution shall be provided through position of adjustment pins.

Fixture shall be supplied with a canopy for installation on any four inch octagon box. Housing shall be so designed to allow for lamp replacement if required.

The remote unit shall be the Lumacell model:
M_____ .

Project / Location		Date
Contractor		Prepared by
LUMACELL Model		




Wire Guard

460.0029-L	Wall Mount
------------	------------

MT / MQ / MQM

Dimensions

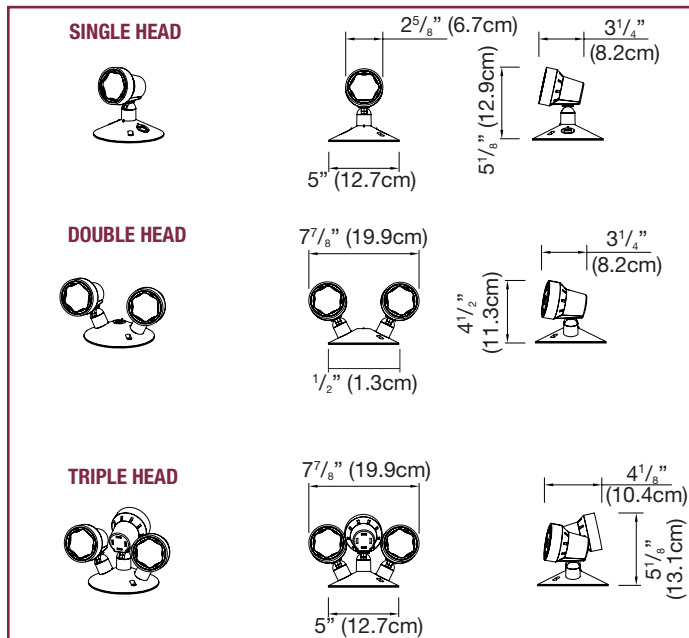

Replacement Lamps

Model	Lamp Type	Voltage-Wattage
570.0016-L	Tungsten	6V-9W
570.0045-L	Tungsten	24V-9W
570.0015-L	Halogen (quartz)	12V-12W

See the complete list p. 196 to 199.

Ordering Information

Series	Lamp Type	# of Heads	Voltage/Wattage/Lamp Type	Colour
M = micro, PAR 18	T = tungsten, wedge base	1 = single head	6V9W = 6V-9W, wedge base	Blank = factory white BK = black
	Q = halogen, quartz bi-pin	2 = double head	12V9W = 12V-9W, wedge base	
	QM = halogen, MR16	3 = triple head	12V18W = 12V-18W, wedge base	24V9W = 24V-9W, wedge base
			24V18W = 24V-18W, wedge base	6V8W = 6V-8W, quartz bi-pin
			6V12W = 6V-12W, quartz bi-pin	
			12V8W = 12V-8W, quartz bi-pin	
			12V12W = 12V-12W, quartz bi-pin	
			6V6W = 6V-6W, MR16	
			6V10W = 6V-10W, MR16	
			12V12W = 12V-12W, MR16	
			12V20W = 12V-20W, MR16	
			24V12W = 24V-12W, MR16	
			24V20W = 24V-20W, MR16	

EXAMPLE: MT16V9W