

Wire Marker Cards

COMBINATION PACKS

Combination Packs



Each pack contains one card each of 25 numbers or 26 letters (A-Z) with all legends identical on each individual card.

| | B-500 Vinyl Cloth | B-702 Vinyl Film | B-605 Over- Laminated |
|-----------------------|-------------------------|------------------------|-----------------------------|
| 1 - 25 | CPCWM-1-25 | CPTWM-1-25 | CPOLWM-1-25 |
| 26 - 50 | CPCWM-26-50 | CPTWM-26-50 | CPOLWM-26-50 |
| 51 - 75 | CPCWM-51-75 | CPTWM-51-75 | CPOLWM-51-75 |
| 76 - 100 | CPCWM-76-100 | CPTWM-76-100 | CPOLWM-76-100 |
| 101 - 125 | CPCWM-101-125 | CPTWM-101-125 | |
| 126 - 150 | CPCWM-126-150 | CPTWM-126-150 | |
| 151 - 175 | CPCWM-151-175 | CPTWM-151-175 | |
| 176 - 200 | CPCWM-176-200 | CPTWM-176-200 | |
| and so on thru | and so on thru | and so on thru | |
| 301 - 325 | CPCWM-301-325 | CPTWM-301-325 | |
| and so on thru | and so on thru | and so on thru | |
| 576 - 600 | CPCWM-576-600 | | |
| A - Z | CPCWM-A-Z | CPTWM-A-Z | CPOLWM-A-Z-CAP |


Five Packs



Vinyl Cloth (B-500)

| LEGEND | Part Number | Sequences per Card | |
|-----------------------|----------------|--------------------|-------------------|
| | | 1.500" (38.10 mm) | 0.750" (19.05 mm) |
| 0 | WM-0-VP | | |
| 1 | WM-1-VP | | |
| 2 | WM-2-VP | | |
| and so on thru | and so on thru | | |
| 9 | WM-9-VP | | |
| 1 - 33 | WM-1-33-VP | 1 | 2 |
| 34 - 66 | WM-34-66-VP | 1 | 2 |
| A - Z | WM-A-Z-VP | 1 | 2 |


Standard Solid Motor Numbers



Acetate Cloth (B-12)

| LEGEND | Part Number | Markers per Card | |
|-----------------------|----------------|-------------------|-------------------|
| | | 1.500" (38.10 mm) | 0.750" (19.05 mm) |
| T1 | HH-T1 | 36 | 72 |
| T2 | HH-T2 | 36 | 72 |
| T3 | HH-T3 | 36 | 72 |
| and so on thru | and so on thru | | |
| T6 | HH-T6 | 36 | 72 |


Motor Hook-Up Diagrams

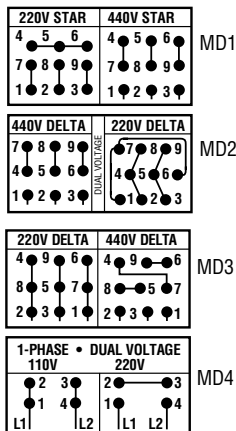

Acetate Cloth (B-12)

| STYLE | Part Number | Marker Size | |
|----------|-------------|---------------|-----------------|
| | | Inch (mm) | |
| A | MD-1 | 1.500 x 0.750 | (38.10 x 19.05) |
| B | MD-2 | 1.500 x 0.750 | (38.10 x 19.05) |
| C | MD-3 | 1.500 x 0.750 | (38.10 x 19.05) |
| D | MD-4 | 1.500 x 0.705 | (38.10 x 19.05) |



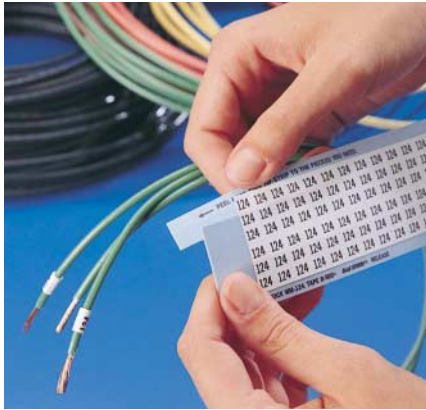

Pre-Printed Wire Markers Materials Chart






Brady's exclusive ZipStrip® release card lets you easily remove the markers you need, when you need them.

| Type | Max. Service Temp. °F (°C) | Color | Finish | Use | Special Properties |
|------------------------------|----------------------------|--------------|--------|--|--|
| ACETATE CLOTH | | | | | |
| B-12 | 221 (105) | White | Matte | Wire marker for varnish dip or baking cycles | Oil and heat resistant |
| ALUMINUM FOIL | | | | | |
| B-184 | 266 (130) | Silver | Matte | Permanent debossed marking | Heat, oil, solvent and abrasion resistant |
| OVERLAMINATED TEDLAR® | | | | | |
| B-605 | 260 (127) | White | Gloss | Machine tools; hostile environments | Heat, oil, solvent and abrasion resistant |
| POLYESTER | | | | | |
| B-11 | 266 (130) | White | Gloss | Roll-form wire marking; hostile environments | Heat, oil and solvent resistant |
| B-702 | 221 (105) | White | Gloss | Vinyl coated; machine tool labeling | Oil and mild solvent resistant; high adhesion |
| POLYOLEFIN | | | | | |
| B-319 | 221 (105) | White | Matte | Computer printable sleeve markers | Permanent; not heat shrinkable |
| B-321 | 221 (105) | White/Yellow | Matte | Computer printable sleeve markers | Permanent; heat shrinkable |
| VINYL | | | | | |
| B-292 | 150 (66) | White | Matte | Machine tool, flat ribbon, and wire marking | Conformable, durable; oil, water and mild solvent resistant |
| B-708 | 150 (66) | White | Gloss | Indoor/outdoor cable marking | Conformable, durable; oil, water and mild solvent resistant; self laminating |
| VINYL CLOTH | | | | | |
| B-500 | 180 (82) | White/Yellow | Matte | All-purpose marker | Moderate heat, oil and dirt resistance; high adhesion |

Tedlar® is a registered trademark of DuPont.

| Brady Material # | Material | Color | Temp. Range | Print Technology | Properties & Applications |
|------------------|--------------------------------|-----------------------------------|---|--|---|
| B-484 | Polyester | White | -40°F to 248°F (-40°C to 120°C) | Thermal Transfer | 1 mil white polyester with a permanent, ultra-aggressive adhesive. Designed for powder-coated surfaces and curved/angled surfaces. |
| B-486 | Metallized Polyester | Silver | -40°F to 248°F (-40°C to 120°C) | Thermal Transfer | Matte metallized polyester with a permanent, ultra aggressive adhesive. Designed for applications like rating and serial plates that require high adhesion to textured metals, low surface energy plastics, or powder coated surfaces.   |
| B-487 | Polyimide | White | -94°F to 662°F (-70°C to 350°C) 80 seconds at 662°F (350°C) | Thermal Transfer | Polyimide film with a permanent acrylic adhesive, designed to withstand the various processes, fluxes and cleaning solvents encountered in the manufacture of printed circuit boards. Matte topcoat provides excellent resistance to solder balling. Can be used for top- or bottom-side component or board identification.  |
| B-488 | Polyester | White | -40°F to 320°F (-40°C to 160°C) | Thermal Transfer | Electronic PCB and component; bar code label and rating plates. High performance matte white.    |
| B-489 | Polyester | White | -40°F to 248°F (-40°C to 120°C) | Thermal Transfer | Matte polyester with ultra aggressive, permanent adhesive. Designed for high adhesion to textured metals, low surface energy plastics, or powder coated surfaces.   |
| B-490 | Polyester | White | — | Thermal Transfer | This material offers the unique ability to apply identification to a frost covered/cryogenically frozen surface. |
| B-495 | Polyethylene Naphthalate (PEN) | White | -94°F to 464°F (-70°C to 240°C) | Thermal Transfer | High temperature PEN film with a permanent acrylic adhesive, designed to withstand most processes, fluxes and cleaning solvents encountered in the manufacture of printed circuit boards. Glossy topcoat provides excellent contrast and smear resistance. Can be used for top- or bottom-side component or board identification, except bottom-side Through Hole applications.  |
| B-497 | Polyimide | White | -94°F to 662°F (-70°C to 350°C) 80 seconds at 662°F (350°C) | Thermal Transfer | 1-mil low profile polyimide film with a permanent acrylic adhesive, designed to withstand the various processes, fluxes and cleaning solvents encountered in the manufacture of printed circuit boards. Matte topcoat provides excellent resistance to solder balling. Can be used for top- or bottom-side component or board identification.  |
| B-498 | Vinyl Cloth | White | -40°F to 175°F (-40°C to 70°C) | Thermal Transfer TLS2200® | Wire, cable and component marking. Repositionable, removes cleanly. Suitable for general identification. |
| B-499 | Nylon Cloth | White | -94°F to 194°F (-70°C to 90°C) | Thermal Transfer Dot Matrix ID PRO Plus LS2000, TLS2200 | Wire and electronic component marking. Permanent adhesive. High adhesion makes all purpose wire marking ideal for environments where heat, cold, oil and dirt are present. Also ideal for laboratory vial identification.  |
| B-500 | Vinyl Cloth | White and Colors | -40°F to 180°F (-40°C to 82°C) | Pre-Printed | Moderately resistant to heat, oil and dirt. Environments containing heat, oil or dirt. Wire and cable marker. Repositionable. |
| B-502 | Vinyl Cloth | White | -40°F to 180°F (-40°C to 82°C) | Dot Matrix ID PRO Plus LS2000 | Resistant to oil, water, humidity. Excellent printability; ink-receptive coating. Applications requiring general-purpose permanent or temporary labeling or marking with printable or write-on properties. Leaves no adhesive residue when removed - good EPROM label. Cable and wire markers. Repositionable. |
| B-503 | Cloth | White | -40°F to 194°F (-40°C to 90°C) | Dot Matrix | Highly conformable. Self-extinguishing, printable tag. Designed for wire and cable identification. Meets UL94VTM-0 for flame retardancy. |
| B-505 | Polyester | White | -40°F to 266°F (-40°C to 130°C) | Dot Matrix | Self-extinguishing, white polyester with a zone coated, permanent pressure sensitive acrylic adhesive. Designed to be used as a connector pull tab and passes the requirements of UL94 VTM-0. |
| B-508 | Nomex® Tag | White or Yellow | -40°F to 180°F (-40°C to 82°C) | Dot Matrix | Computer-printable Nomex tag stock. Designed as a high-performance wire bundle and cable identification tag for use in harsh environments. |
| B-520 | Glass Cloth | White | -85°F to 932°F (-65°C to 500°C) | Thermal Transfer Custom No Stock Parts | Woven glass cloth. Adheres strongly to glass and a variety of metal surfaces. Designed to withstand harsh temperatures, acidic and alkaline environments. Label is pressure sensitive at room temperature and becomes permanently affixed at temperatures above 400°C. |
| B-521 | Glass Cloth | White, Green, Red, Purple, Yellow | -85°F to 932°F (-65°C to 500°C) | Custom No Stock Parts | Non-printable woven glass cloth. Adheres strongly to glass and a variety of metal surfaces. Designed to withstand harsh temperatures, acidic and alkaline environments. Label is pressure sensitive at room temperature and becomes permanently affixed at temperatures above 400°C. |

-  *These materials are UL recognized.
-  *These materials are CSA approved.
-  *These materials are AGA approved.

*Refer to the full page charts on pages 280-281 for more information and complete listing of parts.