




Wallplates

Our extensive line of wallplates is designed and manufactured to perform in a wide range of applications; no matter what you need, you'll find the desired material, configuration, size and color. Their heavy-duty construction provides outstanding performance throughout a home. Available in one- through six-gang configurations.




Wallplate families



Wallplate colors



- Mid-size screwless wallplates deliver the ultimate in designer looks with a screwless finish; they are fast and easy to install, virtually unbreakable and easy to clean
- Mid-size & oversize wallplates are designed for use in applications where additional wall coverage is needed
- Extra depth wallplates are available for use with old work outlet boxes for a flush fit to the wall
- Available wallplate materials include virtually unbreakable nylon & polycarbonate thermoplastics, 302/304 corrosion resistant stainless steel, brass, and thermoset
- Nylon & polycarbonate wallplates feature screw-catch, a timesaving feature that holds mounting screws captive to simplify installation
- Our wallplates are manufactured according to the performance & dimensional requirements of Federal Specification WP-455, NEMA Standard WD-1, UL Standard 514 and the NEC®

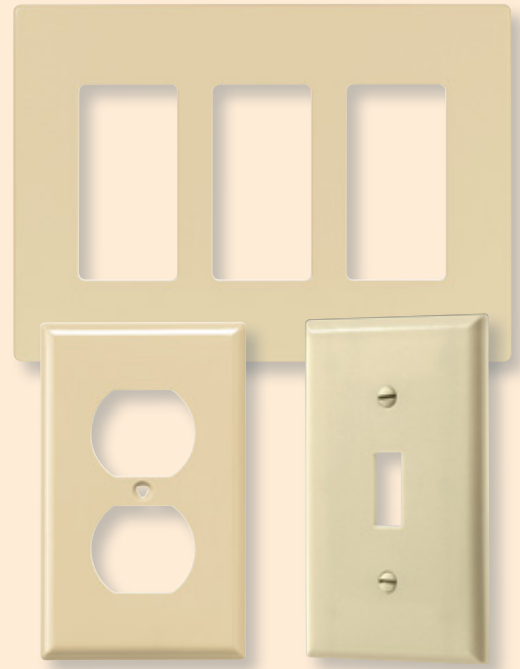

Specific wallplate solutions for today's needs



Aesthetic upgrade

Our screwless wallplates come in 3 different openings for upgrading the look of toggle switches, GFCIs, rotary dimmers and duplex receptacles without having to change out devices!

See pages C-17 to C-19

Shown:
PJS1




Corrosion resistance

Brass and stainless steel wallplates offer durable, elegant corrosion resistance making them ideal for high-moisture locations like kitchens, baths, garages and basements.

See pages C-10 to C-25

Shown:
93101




Impact resistance

Thermoplastic polycarbonate and nylon wallplates are virtually unbreakable, warp resistant, abrasion resistant and soil resistant, making them ideal for high-traffic areas.

See pages C-10 to C-26

Shown:
PJ26





Thermoplastic nylon or polycarbonate wallplates

Design features

- Rugged construction reduces installation cost due to less plate breakage and resists bowing to provide a smooth, flat installation
- Exclusive timesaving Screw-catch feature holds mounting screws captive and simplifies installation
- High gloss finish is soil resistant
- Polycarbonate wallplates are virtually unbreakable with high structural rigidity, long-term form retention, plus superior impact and abrasion resistance

- Nylon wallplates have a flush-fitting, warp resistant design
- Matching mounting screws provide

Testing & code compliance

- cULus listed to UL514C, file no. E33216, certified to CSA C22.2, no. 42.1

Material characteristics

- Flammability: meets UL94 requirements; 5V rated
- Temperature rating: -40°C to 70°C (-40°F to 158°F)



Thermoset wallplates

Design features

- Extensive line of non-flammable thermoset plates provides flush-fitting, warp resistant performance

Material characteristics

- Flammability: Meets UL94 requirements; 5V rated
- Temperature rating: -40°C to 65°C (-40°F to 149°F)

Testing & code compliance

- cULus listed to UL514C, file no. E33216, certified to CSA C22.2, no. 42.1



302/304 Stainless steel wallplates

Design features

- Superior non-corrosive and non-magnetic properties for applications needing protection from those elements
- Stainless steel alloy contains 18% chromium and 8% nickel for corrosion resistance
- Stamped from 0.032" (0.81mm) thick material
- Horizontally satin-brushed surface finish resists finger prints
- All plates are coated with clear, removable PVC to safeguard the surface during handling and installation

- Matching stainless steel mounting screws provided

Testing & code compliance

- Listed to UL514D, file no. E92122, certified to CSA C22.2, no.42.1

Material characteristics

- Temperature rating: -40°C to 70°C (-40°F to 158°F)



Brass wallplates

Design features

- Line of handsomely crafted, elegant solid brass designs in 11 popular NEMA standard size configurations
- Strong, corrosion resistant and coated with transparent lacquer to resist premature oxidation
- Horizontally satin-brushed surface finish resists fingerprints
- Matching brass-plated steel screws resist damage during installation

- All plates are coated with clear, removable PVC to safeguard the surface during handling and installation
- Solid brass material is a 70/30 alloy (#26C), .040" (1.02mm) thick

Testing & code compliance


- Listed to UL514D, file no. E92003

Material characteristics

- Temperature rating: -40°C to 70°C (-40°F to 158°F)


Compliances, specifications and availability are subject to change without notice.

Toggle




| Gang | Standard size | | | | Mid-size | | | | Oversize | |
|--------|---------------|--------|-----------------|-------|-----------|---------------|-----------|-----------------|-----------|-----------------|
| | Thermoset | Nylon | Stainless steel | Brass | Thermoset | Polycarbonate | Screwless | Stainless steel | Thermoset | Stainless steel |
| 1-Gang | 2134__ | 5134__ | 93071 | 94071 | 2034__ | PJ1__ | PJS1__ | 93971 | 2144__ | 93871 |
| 2-Gang | 2139__ | 5139__ | 93072 | 94072 | 2039__ | PJ2__ | PJS2__ | 93972 | 2149__ | 93872 |
| 3-Gang | 2141__ | 5141__ | 93073 | 94073 | 2041__ | PJ3__ | PJS3__ | 93973 | 2741__ | 93873 |
| 4-Gang | 2154__ | 5154__ | 93074 | — | 2054__ | PJ4__ | PJS4__ | — | — | 93874 |
| 5-Gang | 2155__ | — | 93075 | — | — | PJ5__ | — | — | — | — |
| 6-Gang | 2156__ | — | 93076 | — | — | PJ6__ | — | — | — | — |

Decorator/GFCI




| Gang | Standard size | | | | Mid-size | | | | Oversize | |
|--------|---------------|--------|-----------------|-------|-----------|---------------|-----------|-----------------|-----------|-----------------|
| | Thermoset | Nylon | Stainless steel | Brass | Thermoset | Polycarbonate | Screwless | Stainless steel | Thermoset | Stainless steel |
| 1-Gang | 2151__ | 5151__ | 93401 | 94401 | 2051__ | PJ26__ | PJS26__ | 93934 | 2751__ | 93834 |
| 2-Gang | 2152__ | 5152__ | 93402 | 94402 | 2052__ | PJ262__ | PJS262__ | 93935 | — | — |
| 3-Gang | 2163__ | — | 93403 | — | 2063__ | PJ263__ | PJS263__ | 93936 | — | — |
| 4-Gang | 2164__ | — | 93404 | — | 2064__ | PJ264__ | PJS264__ | — | — | — |
| 5-Gang | 2165__ | — | 93405 | — | — | PJ265__ | PJS265__ | — | — | — |
| 6-Gang | 2166__ | — | 93406 | — | — | PJ266__ | PJS266__ | — | — | — |

Duplex receptacle



| Gang | Standard size | | | | Mid-size | | | | Oversize | |
|--------|---------------|--------|-----------------|-------|-----------|---------------|-----------|-----------------|-----------|-----------------|
| | Thermoset | Nylon | Stainless steel | Brass | Thermoset | Polycarbonate | Screwless | Stainless steel | Thermoset | Stainless steel |
| 1-Gang | 2132__ | 5132__ | 93101 | 94101 | 2032__ | PJ8__ | PJS8__ | 93901 | 2142__ | 93801 |
| 2-Gang | 2150__ | 5150__ | 93102 | 94102 | 2050__ | PJ82__ | — | 93902 | 2750__ | 93802 |
| 3-Gang | — | — | 93103 | — | — | — | — | — | — | — |

Blank




| Gang | Standard size | | | | Mid-size | | | | Oversize | |
|-------------|---------------|--------|-----------------|-------|-----------|---------------|-----------|-----------------|-----------|-----------------|
| | Thermoset | Nylon | Stainless steel | Brass | Thermoset | Polycarbonate | Screwless | Stainless steel | Thermoset | Stainless steel |
| 1-Gang | 2129__ | 5129__ | 93151 | 94151 | 2029__ | PJ13__ | — | 93951 | 2729__ | 93851 |
| 2-Gang | 2137__ | 5137__ | 93152 | — | 2037__ | PJ23__ | — | — | — | 93852 |
| 3-Gang | — | — | 93153 | — | — | — | — | — | — | — |
| 4-Gang | — | — | 93154 | — | — | — | — | — | — | — |
| 1-strap mt. | — | — | — | — | — | PJ14__ | — | — | — | — |

Compliances, specifications and availability are subject to change without notice.


Mid-size duplex, screwless & single receptacles wallplates

Product description


1-Gang, 2-Gang




1-Gang



2-Gang



1-Gang



1-Gang

Duplex receptacle

| Description | Material | Color suffix | Catalog no. | | |
|-------------|-------------------------|--------------------------------|-------------|---|---|
| 1-Gang | Polycarbonate | A, B, BK, BL, GY, LA, RD, V, W | □ PJ8__ | • | • |
| | Thermoset | A, B, LA, V, W | □ 2032__ | • | • |
| | 302/304 Stainless steel | — | □ 93901 | • | • |
| 2-Gang | Polycarbonate | A, B, BK, GY, LA, RD, V, W | □ PJ82__ | • | • |
| | Thermoset | A, LA, V, W | □ 2050__ | • | • |
| | 302/304 Stainless steel | — | □ 93902 | • | • |

Mid-size duplex receptacle screwless wallplates

Product description

1-Gang


| Description | Material | Color suffix | Catalog no. |
|-------------|---------------|------------------------|-------------|
| 1-Gang | Polycarbonate | A, B, BB, BK, LA, V, W | □ PJS8__ |

Single receptacle

| Description | Material | Color suffix | Catalog no. | | |
|---------------------------------|-------------------------|----------------|-------------|---|---|
| 1-Gang with 1.41" (35.7mm) hole | Thermoset | A, B, LA, V, W | □ 2031__ | • | • |
| | 302/304 Stainless steel | — | □ 93991 | • | • |

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), BL (Blue), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White), BB (Brushed Bronze), Stainless Steel

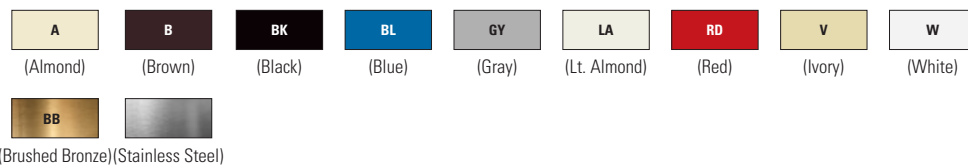

Certification information: 2000, 5000 and PJ series wallplates are cULus certified; 93000 series wallplates are UL and CSA certified; 94000 are UL certified **Dimensional information:** C-5, C-6 **Specification information:** Please visit www.eaton.com/wiringdevices
Compliances, specifications and availability are subject to change without notice.

Indicates NAFTA compliant - Page G-21

RoHS compliant - Page G-21