

## The Industry's Most Complete Line of Locking Industrial Devices

Arrow Hart offers the most rugged, feature-rich, broadest line of quality locking devices to meet the specific needs of demanding industrial applications



### Hart-Lock™ Locking Devices

The widest range of NEMA and non-NEMA devices, designed and built with superior materials for long lasting performance.




### Hart-Lock™ 50A Locking Devices

Rugged Pro-Grip™, armored and marine grade 50A locking devices are ideal for harsh construction and industrial applications.



### Power-Lock Devices

Power-Lock devices offer a positive engagement single-post design in rugged nylon or armored shell housings for reliable service.



### Hart-Lock™ Flat Cable Devices

Hart-Lock Flat Cable plugs & connectors are designed specifically for 4-Pole, 5-Wire flat cable applications in convention and exhibit halls or other high-traffic flat-cable environments.



## Watertight, Severe-Duty & Corrosion Resistant Devices Moved to Complex Environments (Section D)



### Complex Environment Devices

#### Watertight Devices

#### Severe Duty Devices

#### Corrosion Resistant Devices

See Section D for a complete line of watertight, severe-duty and corrosion resistant locking devices.


## Rugged, Quality Locking Devices for Any Application

Superior design and performance make Arrow Hart's Hart-Lock™ devices the ideal choice for industrial applications. Available in a wide range of NEMA and Non-NEMA configurations

### Hart-Lock™ SafetyGrip Plugs & Connectors




### Hart-Lock™ AutoGrip Plugs & Connectors

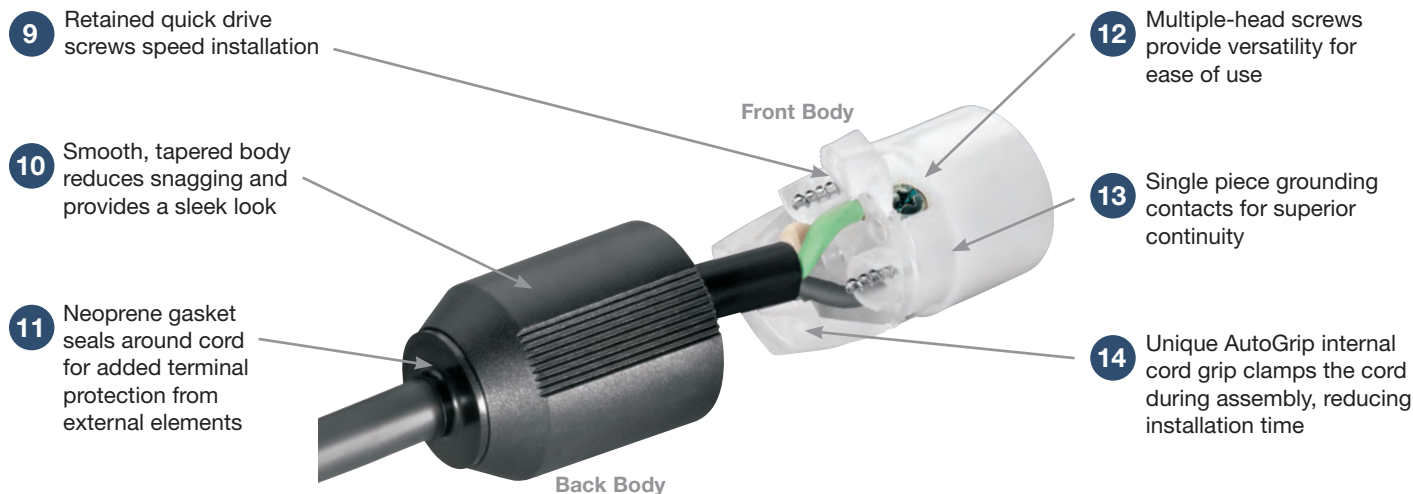

Specifications and availability are subject to change without notice.

## Hart-Lock™ Industrial Receptacles

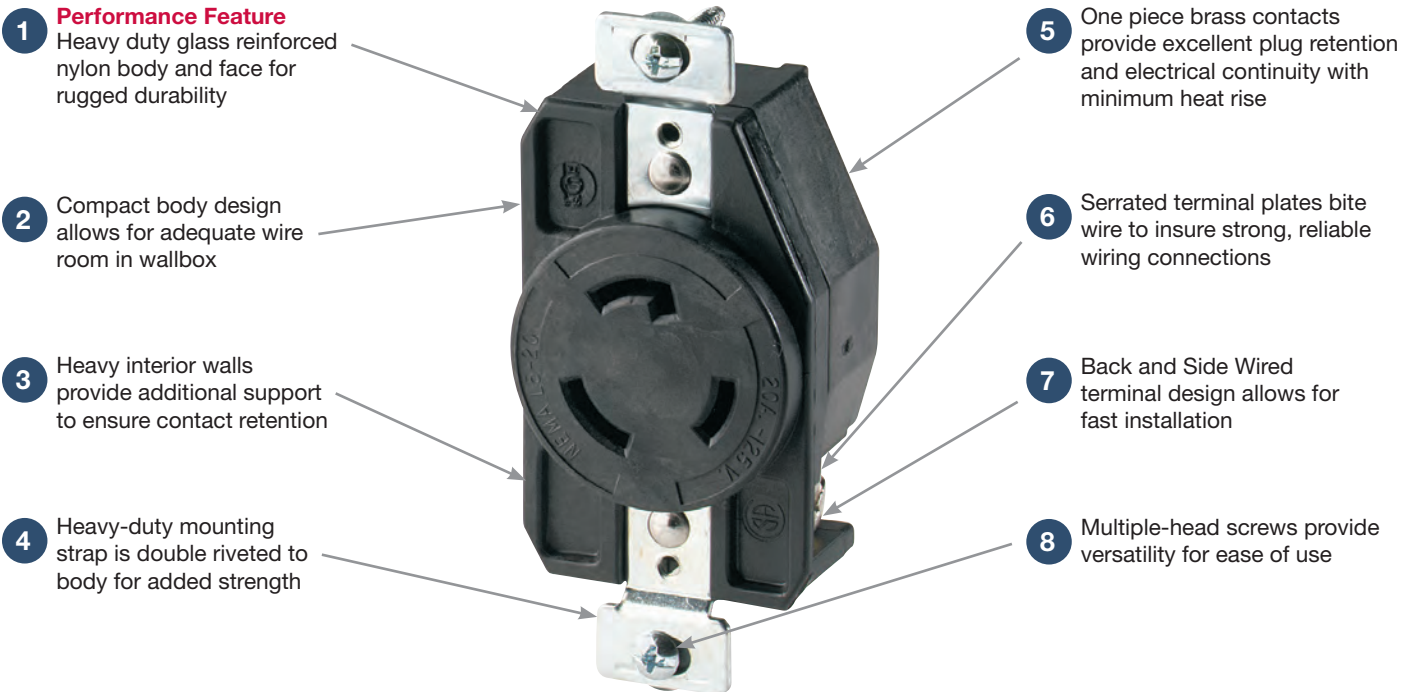

## Hart-Lock™ Industrial Flanged Inlets &amp; Outlets



Specifications and availability are subject to change without notice.

# Hart-Lock™ Industrial Grade Locking Devices





2-Pole, 3-Wire Grounding  
15A, 125V/AC  
NEMA L5-15



**L5-15R**






**L5-15P**

Industrial Grade Plugs & Connectors   								
Rating A	V/AC	NEMA	Description	Cord Diameter	Color	Plug Catalog No.	Connector Catalog No.	
15	125	L5-15	SafetyGrip Straight Body	0.33-0.66" (8.4-16.7mm)	BK & W	<input type="checkbox"/> CWL515P	<input type="checkbox"/> CWL515C	•
			SafetyGrip Angled Body	0.33-0.66" (8.4-16.7mm)	BK & W	<input type="checkbox"/> CWL515PAN	<input type="checkbox"/> CWL515CAN	•
			AutoGrip	0.33-0.66" (8.4-16.7mm)	BK & W	<input type="checkbox"/> 4721N	<input type="checkbox"/> 4731N	•



**CWL515C**

Industrial Grade Receptacles   					
Rating A	V/AC	NEMA	Description	Color	Single Receptacle
15	125	L5-15	Standard Industrial	BK	<input type="checkbox"/> CWL515R* —
			Standard Industrial	BK	— <input type="checkbox"/> 4700
			Isolated Ground	RN	<input type="checkbox"/> IGL515R* <input type="checkbox"/> IG4700*
		5-15	Combination Locking & Straight Blade	BK	— <input type="checkbox"/> 5792*

\*Not Fed Spec.

Industrial Grade Flanged Inlet 					
Rating A	V/AC	NEMA	Description	Color	Flanged Inlet
15	125	L5-15	Standard Industrial	BK & W	<input type="checkbox"/> CWL515FI

Industrial Grade Flanged Outlet  					
Rating A	V/AC	NEMA	Description	Color	Flanged Outlet
15	125	L5-15	Standard Industrial	BK & W	<input type="checkbox"/> CWL515FO

## Color Information:

BK (Black), RN (Orange), W (White)



Specifications and availability are subject to change without notice.

 Indicates NAFTA Compliant - Page R-30

## Complex Environment (D)

See Section D for Watertight, Severe-Duty & Corrosion Resistant Devices

**Dimensional Information:**  
C-76-C-78

**Plug & Connector Specification Information:**

SafetyGrip L5-15: C-84

AutoGrip L5-15: C-84

**Receptacle Specification Information:**

L5-15: C-86

Isolated Ground L5-15: C-86


**Flanged Inlet & Flanged Outlet Specification Information:**

L5-15: C-88




## 15A, 20A &amp; 30A Locking Devices, Dimensional Data

## SafetyGrip Plugs

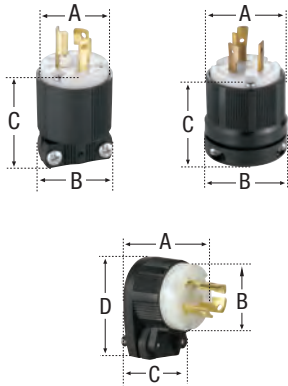


Family	A	B	C	D	Cord Diameter
NEMA L2-20	1.37" (34.8mm)	1.50" (38.1mm)	2.06" (52.3mm)	–	0.33-0.66" (8.4-16.7mm)
15A & 10/15A Locking	1.37" (34.8mm)	1.50" (38.1mm)	2.06" (52.3mm)	–	0.33-0.66" (8.4-16.7mm)
15A Locking Angled	1.28" (32.5mm)	1.47" (37.3mm)	1.50" (38.1mm)	2.06" (52.3mm)	0.33-0.66" (8.4-16.7mm)
20/10A Locking	2.19" (55.6mm)	2.31" (58.7mm)	2.75" (69.9mm)	–	0.63-1.16" (15.9-29.4mm)
20A Locking 2-P, 3-W; 3-P, 3-W	2.00" (50.8mm)	2.12" (53.8mm)	2.34" (59.4mm)	–	0.38-1.00" (9.5-25.4mm)
20A Locking 3-P, 4-W; 4-P, 4-W; 4-P, 5-W	2.19" (55.6mm)	2.31" (58.7mm)	2.75" (69.9mm)	–	0.63-1.16" (15.9-29.4mm)
30A Locking 2-P, 3-W; 3-P, 3-W	2.00" (50.8mm)	2.12" (53.8mm)	2.34" (59.4mm)	–	0.38-1.00" (9.5-25.4mm)
30A Locking 3-P, 4-W; 4-P, 4-W; 4-P, 5-W	2.19" (55.6mm)	2.31" (58.7mm)	2.75" (69.9mm)	–	0.63-1.16" (15.9-29.4mm)

## SafetyGrip Connectors



Family	A	B	C	D	Cord Diameter
NEMA L2-20	1.37" (34.8mm)	2.88" (73.0mm)	1.50" (38.1mm)	1.00" (25.4mm)	0.33-0.66" (8.4-16.7mm)
15A & 10/15A Locking	1.37" (34.8mm)	2.88" (73.0mm)	1.50" (38.1mm)	1.00" (25.4mm)	0.33-0.66" (8.4-16.7mm)
20/10A Locking	1.37" (34.8mm)	2.88" (73.0mm)	1.50" (38.1mm)	1.00" (25.4mm)	0.33-0.66" (8.4-16.7mm)
20A Locking 2-P, 3-W; 3-P, 3-W	2.00" (50.8mm)	3.44" (87.3mm)	2.12" (53.8mm)	1.31" (33.3mm)	0.38-1.00" (9.5-25.4mm)
20A Locking 3-P, 4-W	2.00" (50.8mm)	3.44" (87.3mm)	2.12" (53.8mm)	1.31" (33.3mm)	0.38-1.00" (9.5-25.4mm)
20A Locking 4-P, 4-W & 4-P, 5-W	2.19" (55.6mm)	3.75" (95.3mm)	2.31" (58.7mm)	1.22" (31.0mm)	0.63-1.16" (15.9-29.4mm)
30A Locking 2-P, 3-W; 3-P, 3-W	2.00" (50.8mm)	3.44" (87.3mm)	2.12" (53.8mm)	1.31" (33.3mm)	0.38-1.00" (9.5-25.4mm)
30A Locking 3-P, 4-W; 4-P, 4-W; 4-P, 5-W	2.19" (55.6mm)	3.75" (95.3mm)	2.31" (58.7mm)	1.22" (31.0mm)	0.63-1.16" (15.9-29.4mm)

## AutoGrip Plugs



Family	A	B	C	Cord Dia.
15A & 10/15A Locking	1.38" (34.9mm)	1.83" (46.5mm)	1.52" (38.6mm)	0.33-0.66" (8.4-16.7mm)

## AutoGrip Connectors




Family	A	B	C	Cord Dia.
15A & 10/15A Locking	1.38" (34.9mm)	1.83" (46.5mm)	1.52" (38.6mm)	0.33-0.66" (8.4-16.7mm)

Specifications and availability are subject to change without notice.


## 15A, 20A &amp; 30A Locking Devices, Dimensional Data

## Locking Flanged Inlets

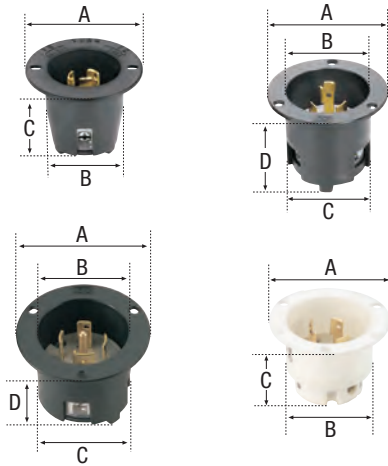

Family	A	B	C	D
15A Locking	2.56" (65.0mm)	1.71" (43.4mm)	1.84" (46.7mm)	–
20A Locking 2-P, 3-W & 3-P, 3-W	2.87" (72.9mm)	1.94" (49.3mm)	2.06" (52.3mm)	2.19" (22.6mm)
20A Locking 3-P, 4-W; 4-P, 4-W; 4-P, 5-W	3.06" (77.7mm)	2.03" (51.6mm)	2.19" (55.6mm)	2.19" (55.6mm)
20A Locking NEMA L9-20, L12-20	2.87" (72.9mm)	2.06" (52.3mm)	1.95" (49.5mm)	–
30A Locking 2-P, 3-W & 3-P, 3-W	2.87" (72.9mm)	1.94" (49.3mm)	2.06" (52.3mm)	2.19" (22.6mm)
30A Locking 3-P, 4-W; 4-P, 4-W; 4-P, 5-W	3.06" (77.7mm)	2.03" (51.6mm)	2.19" (55.6mm)	2.19" (55.6mm)
30A Locking NEMA L9-30, L12-30, L13-30	2.87" (72.9mm)	2.06" (52.3mm)	1.95" (49.5mm)	–

## Locking Flanged Outlets

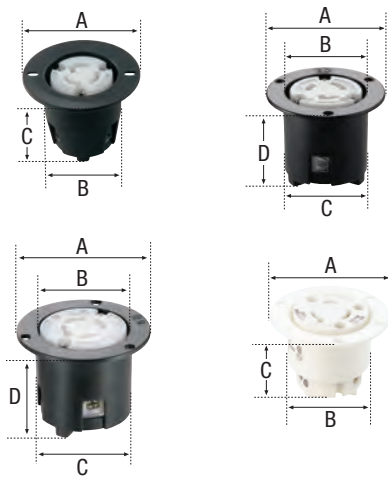

Family	A	B	C	D
15A Locking	2.56" (65.0mm)	1.71" (43.4mm)	1.84" (46.7mm)	–
20A Locking 2-P, 3-W & 3-P, 3-W	2.87" (72.9mm)	1.94" (49.3mm)	2.06" (52.3mm)	2.19" (22.6mm)
20A Locking 3-P, 4-W; 4-P, 4-W; 4-P, 5-W	3.06" (77.7mm)	2.03" (51.6mm)	2.19" (55.6mm)	2.19" (55.6mm)
20A Locking NEMA L9-20, L12-20	2.87" (72.9mm)	2.06" (52.3mm)	1.95" (49.5mm)	–
30A Locking 2-P, 3-W & 3-P, 3-W	2.87" (72.9mm)	1.94" (49.3mm)	2.06" (52.3mm)	2.19" (22.6mm)
30A Locking 3-P, 4-W; 4-P, 4-W; 4-P, 5-W	3.06" (77.7mm)	2.03" (51.6mm)	2.19" (55.6mm)	2.19" (55.6mm)
30A Locking NEMA L9-30, L12-30, L13-30	2.87" (72.9mm)	2.06" (52.3mm)	1.95" (49.5mm)	–

Specifications and availability are subject to change without notice.