



Standard

STANDARD H2Q26TPBLSM

Available for many fluorescent lamp types sold today, including Preheat, Rapid Start, 2-pin CFL, Slimline, High Output, Very High Output and Circline. Magnetic ballasts can be used in any application where these lamps are used.

Product data


General Information		Rated Lamp Power	
Lamp Type	CFQ26W/G24D	Rated Lamp Power	26W W
Number Of Lamps	2 piece/unit	Wiring	
Lamp Footage	-	Wire Striplength	0.50/0.375 mm
Ballast Type	Magnetic Fluorescent	Lamp Connection	Series
Base Model	H2Q26TPBLS	Wire Length By Color	See data sheet
Suitable For Outdoor Use	Yes	Wire Gauge (Nom)	18AWG mm
Automatic Restart	Yes	Wire Type	Solid
Operating and Electrical		Remote Wiring Configuration Allowed	Yes
Input Voltage	120 V	Tandem Wiring Configuration Allowed	Yes
Input Frequency	60 Hz	Through Wiring Configuration Allowed	Yes
Total Harmonic Distortion USA	15 %	Max Ballast-Lamp Distance Remote Wiring	30'
Power (Rated) (Nom)	26 W	Max Ballast-Lamp Distance Tandem Wiring	Any = 30'
Ignition Method	Preheat	Max Ballast-Lamp Distance Through Wiring	Any = 30'
Crestfactor (Nom)	1.7	Mechanical and Housing	
Ignition Time (Nom)	1 s	Housing Material	Metal
Input Current (Open Circuit)	0	Housing	R5
Ballast Factor (Nom)	0.9	Housing Dimensions	9.5" x 2.38" x 1.69"
Power Factor (Nom)	0.98	Approval and Application	
Input Current (Nom)	0.44 A	EMC Immunity Standard	FCC Non-Consumer
Input Power (Nom)	52 W	Hum And Noise Level	A

Standard

UL Recognized	No
Product Data	
Order product name	STANDARD H2Q26TPBLSM
EAN/UPC - Product	781087002254
Order code	913700589709

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	913700589709
Net Weight (Piece)	1.611 kg

Dimensional drawing

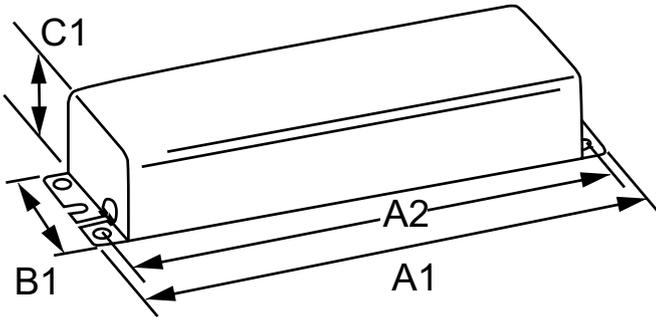

MAG BALLAST (2) 26W COMPACT(2-PIN) 120V

Product	A1	A2	B1	C1
---------	----	----	----	----

