



# FW4-LED41

4' LED Linear Vapourproof fixture

## SPECIFICATIONS\*

Watts	42.54
Lumens	5682.9
Efficacy	133.59 lm/W
Replaces Up To	2 Lamp T8
Colour Temp	<b>Universal Fixture:</b> 3K, 4K, 5K <b>Basic Fixture:</b> 4K only
Operating Temp	-40°C to +40°C
Voltage	<b>Universal Fixture:</b> 120-347 <b>Basic Fixture:</b> 120-277*
LED Life	50,000 hours
Certification	cULus, IP65, DLC
Housing Material	Polycarbonate
Lens	Polycarbonate
Power Factor	0.9954
Total Harmonic Distortion	5.1
CRI	>83.2
Mounting	Surface or Pendant mounting



## 2 DIFFERENT VERSIONS:



### Universal Fixture

120-347V RANGE  
3K, 4K, 5K COLOUR SELECTABLE



### Basic Fixture

120-277V  
4K ONLY



## DESCRIPTION

The FW4-LED41 is a new improved product in the same design as the original FW4 product family. There are two different fixture types - the universal fixture (120 - 347V and 3K/4K/5K colour selectable) and the basic fixture (120-277V, 4K)

## APPLICATIONS



Underground  
Parking  
Garages



Industrial  
Facilities



Poultry  
Barns




Commercial  
Freezers

## FEATURES

- 4' Linear vapourproof LED fixture that replaces 2 lamp T8 fluorescent fixtures
- Polycarbonate housing with frosted lens for harsh environments
- 5 polycarbonate clips on either side
- Surface or pendant mount option

\*The above specs apply to the standard product configuration - FW4-LED41-B-4K. For spec information on other product configurations please see page 3.

## DIMENSIONS

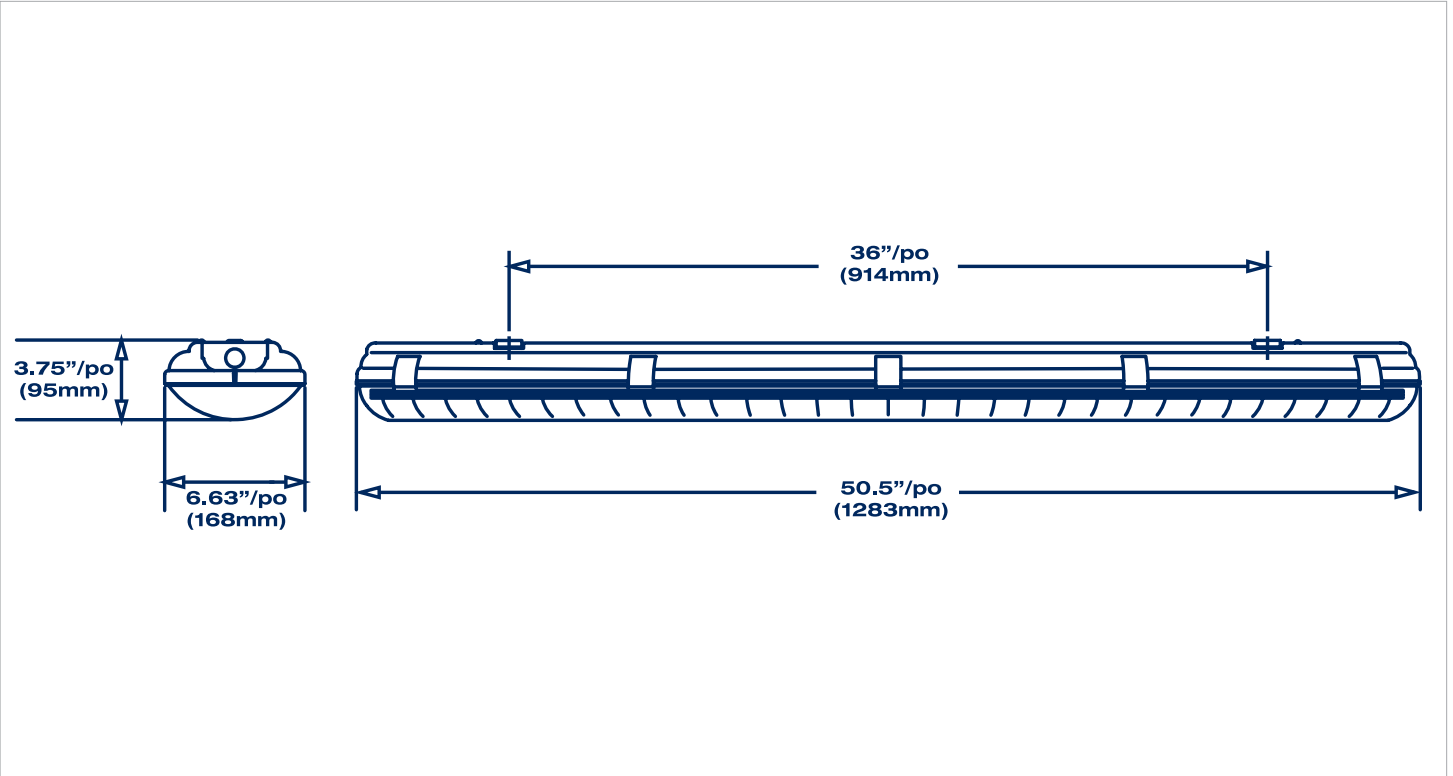

## OTHER MODEL SPECIFICATIONS

MODEL DESCRIPTION	VOLTAGE (V)	INPUT POWER (W)	LIGHT OUTPUT	EFFICACY (Lm/W)	THD	PF	CCT	CRI
FW4-LED41-B-4K-DIM	120-277	42.54	5682.9	133.59	5.1	0.9954	4005	83.2
FW4-LED41-H-VK-DIM (3000K)	120-347	42.63	5044.9	118.34	2.9	0.9983	3170	83.4
FW4-LED41-H-VK-DIM (4000K)	120-347	40.46	5441	134.48	2.3	0.9992	3933	85.5
FW4-LED41-H-VK-DIM (5000K)	120-347	42.61	5254	123.3	2.68	0.9988	5122	84


### LEGEND

B - 120V-277V , H - 120-347V

4K - 4000K, 5K - 5000K, VK - Variable colour temperature


DIM - 0-10V DIMMING

### 2 DIFFERENT VERSIONS:



**Universal Fixture**  
120-347V RANGE  
3K, 4K, 5K COLOUR SELECTABLE  
**ORDER CODE:** FW4-LED41-H-VK-DIM

1



**Basic Fixture**  
120-277V  
4K ONLY  
**ORDER CODE:** FW4-LED41-B-4K-DIM

2

## ORDERING GUIDE



\*Standard Configuration.